
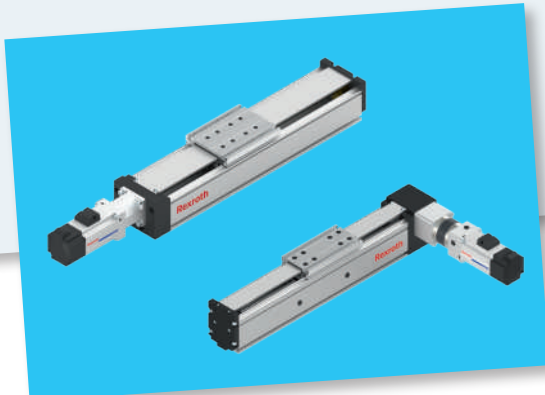
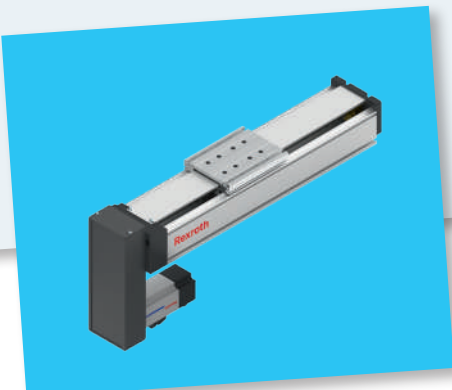
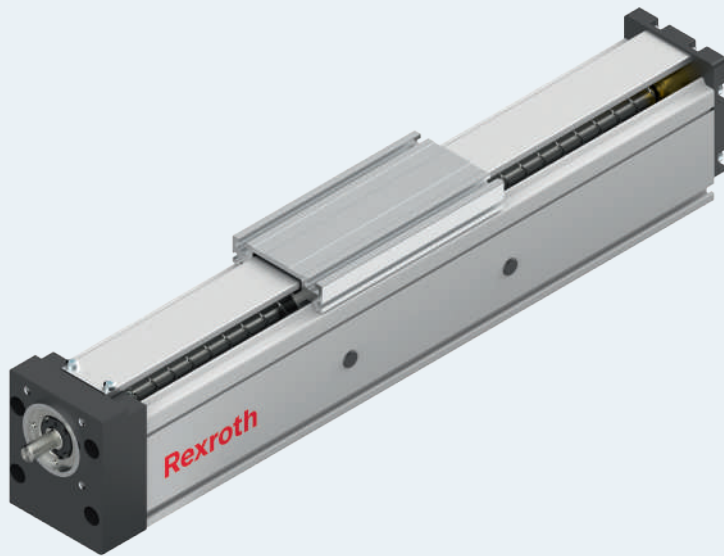







# Function Modules FMS, FMB



**Identification system for short product names**

<b>Example</b>		<b>FM</b>	<b>S</b>	<b>- 080</b>	<b>- SN</b>	<b>- 1</b>
<b>System</b>	=	<b>F</b> unction <b>M</b> odule				
<b>Drive</b>	=	<b>S</b> crew drive (Ball Screw Assembly) <b>B</b> elt drive				
<b>Size</b>	=	<b>080/110</b>				
<b>Version</b>	=	<b>SN</b> single-rail (one Ball Rail System) <b>DN</b> dual-rail (two Ball Rail Systems)				
<b>Generation</b>	=	Product generation <b>1</b>				

Type	Guideway	Drive	Function Module
FMS	 <b>Ball Rail System</b>	 <b>Ball Screw Assembly</b>	
FMB	 <b>Ball Rail System</b>	 <b>Belt drive</b>	

**Changes/additions at a glance**


- ▶ Revision chapter „Technical data“
- ▶ New MSM and ECMA motors integrated in the:
  - Option tables (Configuration and ordering)
  - Technical data tables
  - Dimension drawings „Motor attachment“
  - Motorchapter
- ▶ New controllers for ECMA servomotors
- ▶ New accessories:
  - Adapter shaft for Funktions Modules FMB
  - Nozzle pipe
  - Frequency meter

<b>Product overview</b>	<b>4</b>	<b>Mounting</b>	<b>54</b>
Function Modules with Ball Screw Assembly (FMS)	4	<b>Motor/controller</b>	<b>56</b>
Function Modules with belt drive (FMB)	5	IndraDyn S MSM servo motors	56
FMS/FMB product description	6	ECMA servo motors	58
Function Module delivery details	7	ASD-B2 drive controller	60
Overview of types with load ratings	8	ASD-A2 drive controller	61
General technical instructions	9	<b>Switching system</b>	<b>62</b>
<b>Function Modules FMS</b>	<b>12</b>	Overview of switching system	62
Product description	12	Sensor mounting	63
Structural design/versions	12	<b>Attachments and accessories</b>	<b>64</b>
Structural design	14	Coupling for Function Modules FMB	64
Technical data	16	Adapter shaft for Funktions Modules FMB	65
Calculation	22	Nozzle pipe	65
Calculation principles	22	Frequency meter	65
Drive dimensioning	24	Sensors	66
Configuration and ordering	28	Connectors	70
Frame dimension drawings	32	<b>Additional information</b>	<b>72</b>
Dimensional drawings of details	34	Operating conditions	72
Dimension drawings for motor attachment	35	Documentation	73
<b>Function Modules FMB</b>	<b>36</b>	Parameterization (start-up)	73
Product description	36	Lubrication	74
Structural design/versions	36	Sample calculation	76
Technical Data	38	Abbreviations	80
Calculation	40	Sample order for FMS-080-SN-1	82
Basis of calculations	40	Inquiry/order form for FMx-xxx-xN-1	83
Drive dimensioning	42	Further information	84
Configuration and ordering	46		
Frame dimension drawings	50		
Dimensional drawings of details	52		
Motor attachment dimension drawings	53		


# Product overview

Function Modules with Ball Screw Assembly (FMS)

**Versions with one Ball Rail System  
(single-rail)  
FMS-xxx-SN-x**




**Versions with two Ball Rail Systems  
(dual-rail)  
FMS-xxx-DN-x**



**Without motor attachment**



**Motor attachment with timing belt side drive**

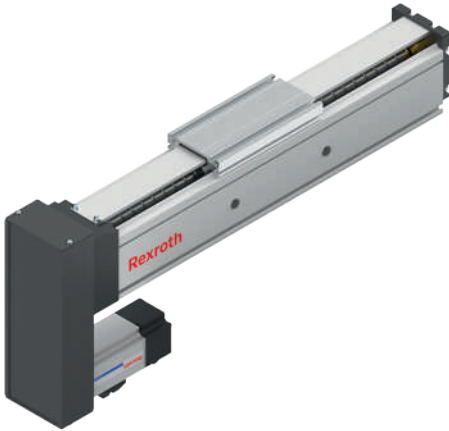


**Motor attachment with mount and coupling**




Function Modules with belt drive (FMB)

**Versions with one Ball Rail System  
(single-rail)  
FMB-xxx-SN-x**



**Versions with two Ball Rail Systems  
(dual-rail)  
FMB-xxx-DN-x**



**Without motor attachment**



**Motor attachment with ancillary gear**



FMS/FMB product description

**Characteristic features**

Rexroth Function Modules meet the precision and load-bearing capacity requirements of numerous popular applications in mechanical engineering, and complement the tried-and-tested portfolio of high-performance linear axes. Rexroth Function Modules are available in single-rail and dual-rail versions, as well as with belt drive or Ball Screw Assembly.

**Structural design**

- ▶ Ready-to-install Function Modules in any length up to  $L_{max}$
- ▶ Extremely compact extruded aluminum frame with integrated Rexroth Ball Rail Systems
- ▶ Identical outer dimensions between FMS and FMB Function Modules
- ▶ Aluminum carriage with T-slots
- ▶ Single-rail and dual-rail versions available
- ▶ Mounted parts protected by aluminum cover plate (optional)

**Attachments (accessories program)**

- ▶ Matching drive controllers for servo and pulse train technology
- ▶ Sensors and extension cables
- ▶ Matching sensors (magnetic and optical sensors)
- ▶ Switching cams
- ▶ Clamping fixtures and sliding blocks

**Further highlights**



- ▶ Selectable options for flexible configuration
- ▶ No assembly required
- ▶ Magnetic and optical sensors can be mounted directly on the frame
- ▶ Planetary gearbox with various gear ratios
- ▶ Servo motors

**Applications**

- ▶ Pick and place
- ▶ Handling
- ▶ Placement systems, palletizers
- ▶ Feed units
- ▶ Inspection and analysis systems
- ▶ Feed units in transfer lines
- ▶ Motion units

**FMS Function Module with Ball Rail System and Ball Screw Assembly**

- ▶ Realization of long travel distances of up to 1,500 mm
- ▶ Travel speeds up to 1 m/s
- ▶ Repeatability of up to +/- 0.015 mm





**Single-rail version  
(FMS-xxx-SN-1)**

**Dual-rail version  
(FMS-xxx-DN-1)**

**FMB Function Module with Ball Rail System and belt drive**

- ▶ Realization of long travel distances of up to 3,800 mm
- ▶ Travel speeds up to 3 m/s
- ▶ Repeatability of up to +/- 0.05 mm



**Single-rail version  
(FMB-xxx-SN-1)**


**Dual-rail version  
(FMB-xxx-DN-1)**

## Function Module delivery details

Function Modules with Ball Screw Assembly or belt drive come fully assembled.


### Gear/motor attachment interface:

If a combination of attachment interface, gear and motor has been selected, the attachment of the components is done as shown in the figure below. When ordering Function Modules only with attachment interface (without gear and motor!), not all parts can be assembled. Assembly must then be completed by the customer. All necessary instructions and parameters for professional assembly are included. The installation variant is selected and determined during product configuration and is a part of the order key.

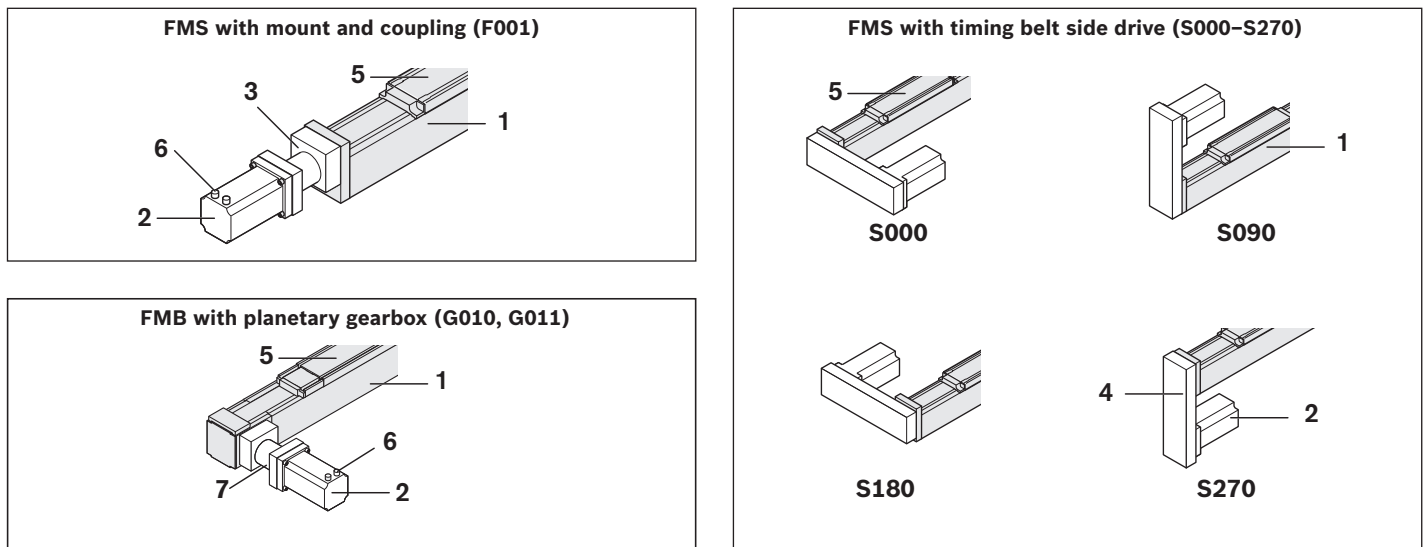

### Motor connector position

- ▶ Function Module in horizontal installation position (carriage on top)
- ▶ View toward the motor from the rear
- ▶ Selectable motor connector locations, see section “Configuration and ordering”



Example:  
Timing belt side drive S270  
Motor connector position 180°

### Switching system

Magnetic and optical sensors can be ordered from the accessories program. Multiple sensors can be installed to suit the application. See the section titled “Switching system”.

### Lubrication

Function Modules come with initial greasing.

### Documentation

Each Function Module comes with appropriate documentation.


- 1 Function Module
- 2 Motor
- 3 Mount and coupling
- 4 Timing belt side drive
- 5 Carriage
- 6 Motor connector
- 7 Gear

Overview of types with load ratings

Read the section below titled “General technical instructions”.

For dimensions and values for calculations, see the technical data for the desired Function Module.

For abbreviations, see the section titled “Abbreviations”.

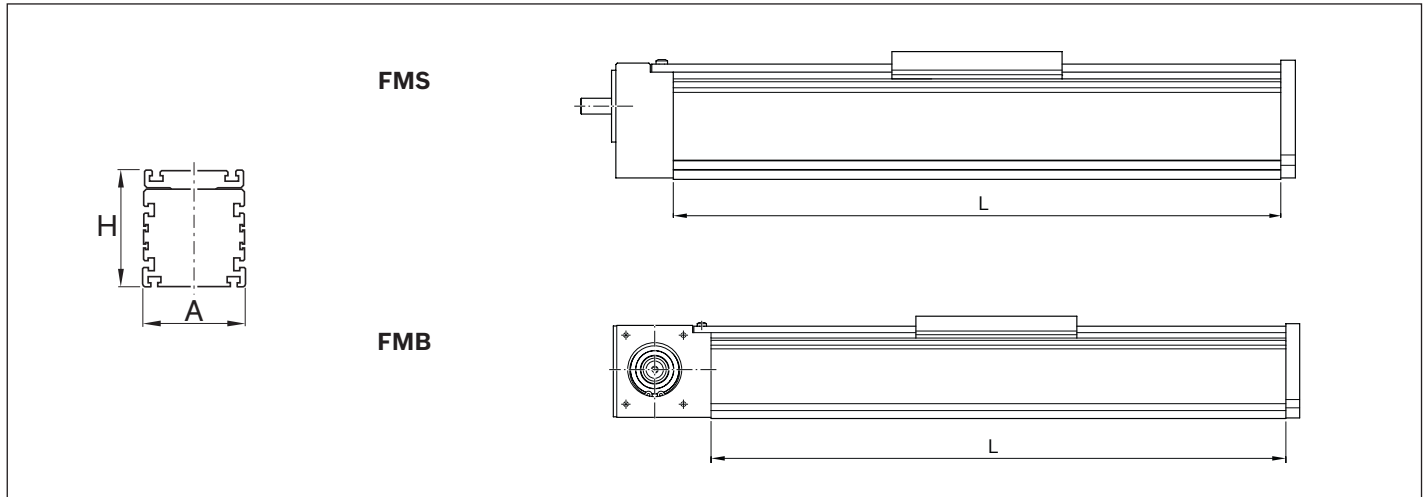

Type	Size	-065		-080		-110		-145	
				A	H	A	H	A	H
	Dimensions (mm)			80	107	110	89		
FMS	L <sub>max</sub> (mm)	In preparation		1,695		1,675		In preparation	
	C <sup>1)</sup> (N)			23,700		24,000			
FMB	L <sub>max</sub> (mm)			4,031		4,013			
	C <sup>1)</sup> (N)			23,700		24,000			

<sup>1)</sup> Maximum permitted values. Depending on design, the load ratings for the dual-rail version are virtually identical when using a smaller Ball Rail System.

General technical instructions

**Note on dynamic load ratings and load moments**

Determination of the dynamic load ratings and load moments is based on a travel life of 100,000 m. However, figures often are only based on 50,000 m. For comparison:

Multiply values  $C$ ,  $M_t$  and  $M_L$  from the table by 1.26.

Load ratings for the Screw Drive as per ISO 3408-5.


Load ratings for the Ball Rail System verified in testing (above the DIN ISO 14728-1 ratings).

**Suitable loads**


With respect to the desired nominal life, loads for  $F_{comb}$ ,  $F_m$  up to approx. 20% of the dynamic characteristics ( $C$ ,  $M_t$ ,  $M_L$ ) have generally proven suitable.

See the section titled “Basis of calculations”.

Do not exceed the technical data for the Linear Motion System.

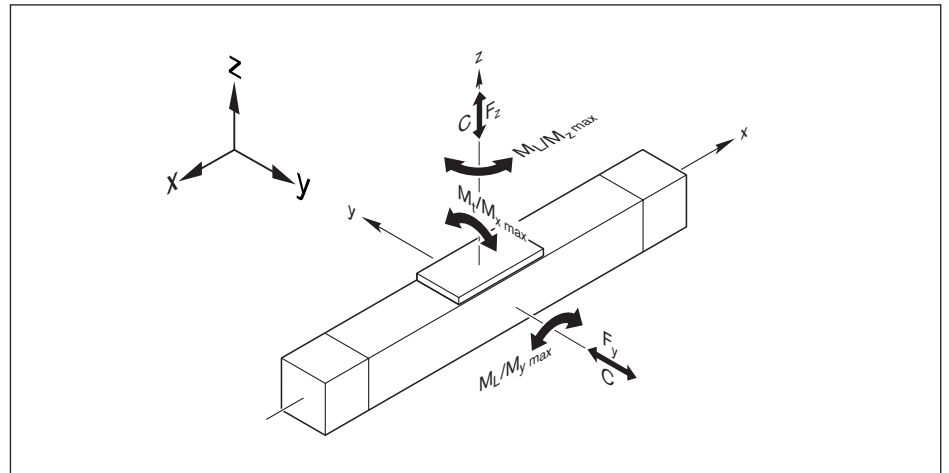

**Application point of the effective force ( $Z_1$ )**

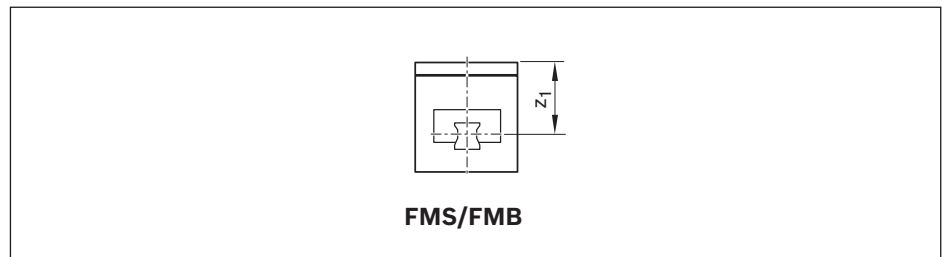

**Modulus of elasticity E**

$E = 70,000 \text{ N/mm}^2$

### Maximum permissible load

When selecting Linear Motion Systems, it is essential to consider the maximum permissible load and force tolerances. The values depend on the system. In other words, the tolerances are determined not only by the load ratings of the bearing points but also tolerances based on design and material.

Conditions for combined loads:

$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

### Combined equivalent load on guideway bearing

$$F_{\text{comb}} = |F_y| + |F_z| + C \cdot \frac{|M_x|}{M_t} + C \cdot \frac{|M_y|}{M_L} + C \cdot \frac{|M_z|}{M_L}$$

### Life

Nominal life of the guideway in meters:

$$L = \left( \frac{C}{f_w \cdot F_{\text{comb}}} \right)^3 \cdot 10^5 \text{ m}$$

Nominal life of the guideway in hours:

$$L_h = \frac{L}{3600 \cdot v_m}$$

### Ball Screw Assembly (BASA) loading and life

When the load and rotary speed vary, the following applies for the average load  $F_m$

$$F_m = \sqrt[3]{|F_{\text{eff } 1}|^3 \cdot \frac{|n_1|}{n_m} \cdot \frac{q_{t1}}{100\%} + |F_{\text{eff } 2}|^3 \cdot \frac{|n_2|}{n_m} \cdot \frac{q_{t2}}{100\%} + \dots + |F_{\text{eff } n}|^3 \cdot \frac{|n_n|}{n_m} \cdot \frac{q_{tn}}{100\%}}$$

### Life

Nominal life (BASA) in revolutions:

$$L = \left( \frac{C_{\text{bs}}}{F_m} \right)^3 \cdot 10^6$$

Nominal life (BASA) in hours:

$$L_h = \frac{L}{n_m \cdot 60}$$

**Linear Motion System weight  $m_s$**

Weight calculation:


- ▶ without motor
- ▶ without sensor attachment
- ▶ without motor attachment

$$m_s = k_{g \text{ fix}} + k_{g \text{ var}} \cdot L + m_{ca}$$

**Length calculation of the Linear Motion System**

$$L = s_{\text{eff}} + 2 \cdot s_e + L_{ca} + L_{ad}$$

$$s_{\text{max}} = s_{\text{eff}} + 2 \cdot s_e$$

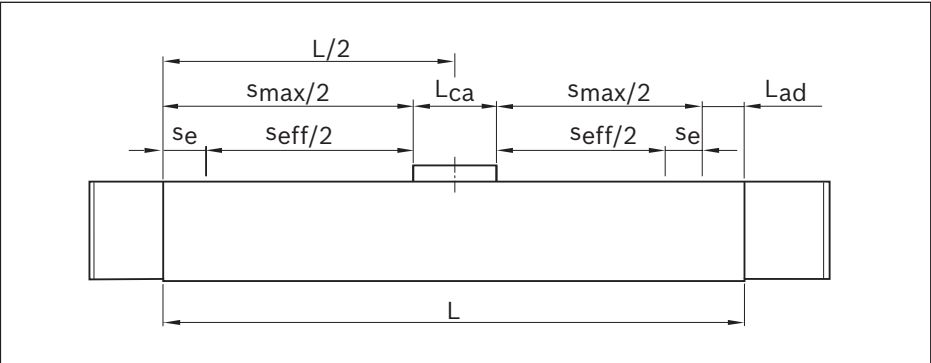

For length calculation values, see the section titled “Technical data” for the desired Function Module (FMS/FMB).

# Function Modules FMS

## Product description

### Features

- ▶ Ready-to-install Function Modules in any length up to  $L_{max}$
- ▶ Extremely compact aluminum frame with integrated Rexroth Ball Rail System (one or two Ball Rail Systems)
- ▶ Ball Rail System with moderate pre-tensioning (pre-tensioning class C1)
- ▶ Driven by a low-backlash Ball Screw Assembly (BASA) in rolled design, tolerance grade T9 as per ISO 3408-3 with Single Nut
- ▶ High travel speeds thanks to large leads with high precision over long distances
- ▶ Aluminum carriage with T-slots
- ▶ Guideway and drive components protected by aluminum cover plate (optional)
- ▶ Low-cost maintenance thanks to in-service lubrication option (grease lubrication)
- ▶ Repeatability of up to  $\pm 0.015$  mm


### Further highlights

- ▶ Standard with integrated solenoid switch for magnetic field sensors
- ▶ Nameplate with parameters for easy start-up
- ▶ Fastening elements

### Attachments

- ▶ Motor attachment via mount and coupling or via timing belt side drive
- ▶ Maintenance-free servo motors with optional holding brake
- ▶ Magnetic field sensors
- ▶ Optical sensors
- ▶ Extensive sensor accessories

## Structural design/versions

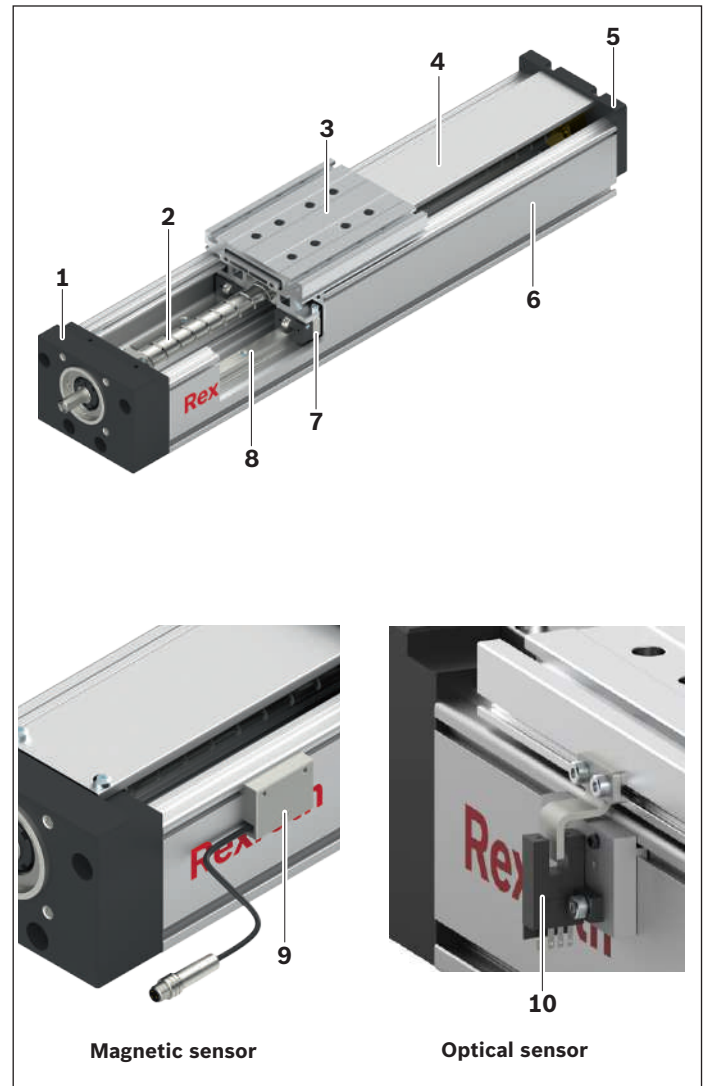

### Structural design

- 1 Drive-side end block
- 2 Ball Screw Assembly (covered)
- 3 Carriage with T-slots
- 4 Cover plate
- 5 End plate
- 6 Frame
- 7 Runner Block
- 8 Guide Rail


### Attachments/accessories

- 9 Magnetic sensor
- 10 Optical sensor


For further information, see the section titled “Accessories”.

**Versions**

**Versions with one Ball Rail System  
(single-rail) FMS-xxx-SN-x**




**Versions with two Ball Rail Systems  
(dual-rail) FMS-xxx-DN-x**



**Without motor attachment**



**Motor attachment with timing belt side drive**

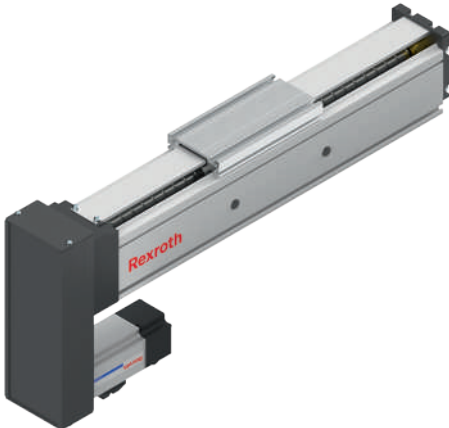

**Motor attachment with mount and coupling**



## Structural design


### **Motor attachment with mount and coupling**

A motor can be attached via a mount and coupling to all Function Modules with a Ball Screw Assembly.

The mount fastens the motor to the Function Module and acts as a closed housing for the coupling.

The coupling transmits the motor drive torque to the Function Module drive shaft without distortive stresses.

Our standard couplings compensate for the system's thermal expansion.

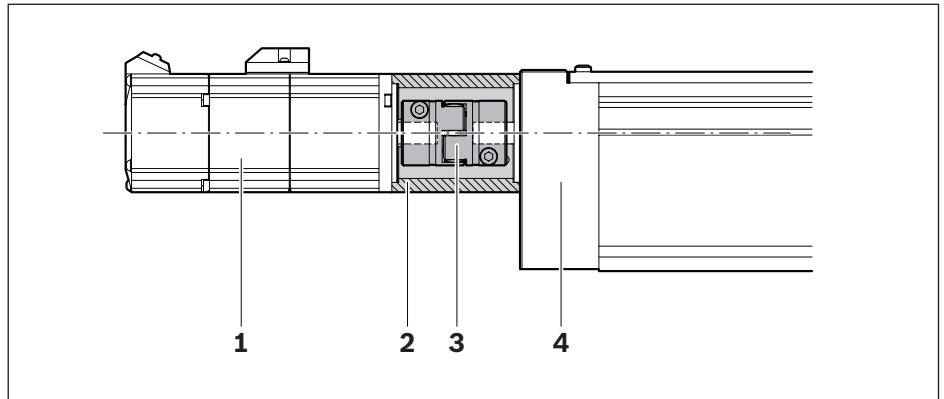

- 1** Motor
- 2** Mount
- 3** Coupling
- 4** Function Module

**Motor attachment via timing belt side drive**

A motor can be attached via a timing belt side drive to all Function Modules with a Ball Screw Assembly.


This makes the overall length shorter than when attaching the motor with a mount and coupling.

The space-saving, closed pulley housing serves as protection for the belt and as a motor bracket.

Various gear ratios are also available.

The timing belt side drive can be mounted in four different directions.

- 1 Pulley housing made of anodized aluminum
- 2 Function Module
- 3 Belt drive with gear ratio
- 4 Motor
- 5 Cover
- 6 Belt pulley
- 7 Cover plate

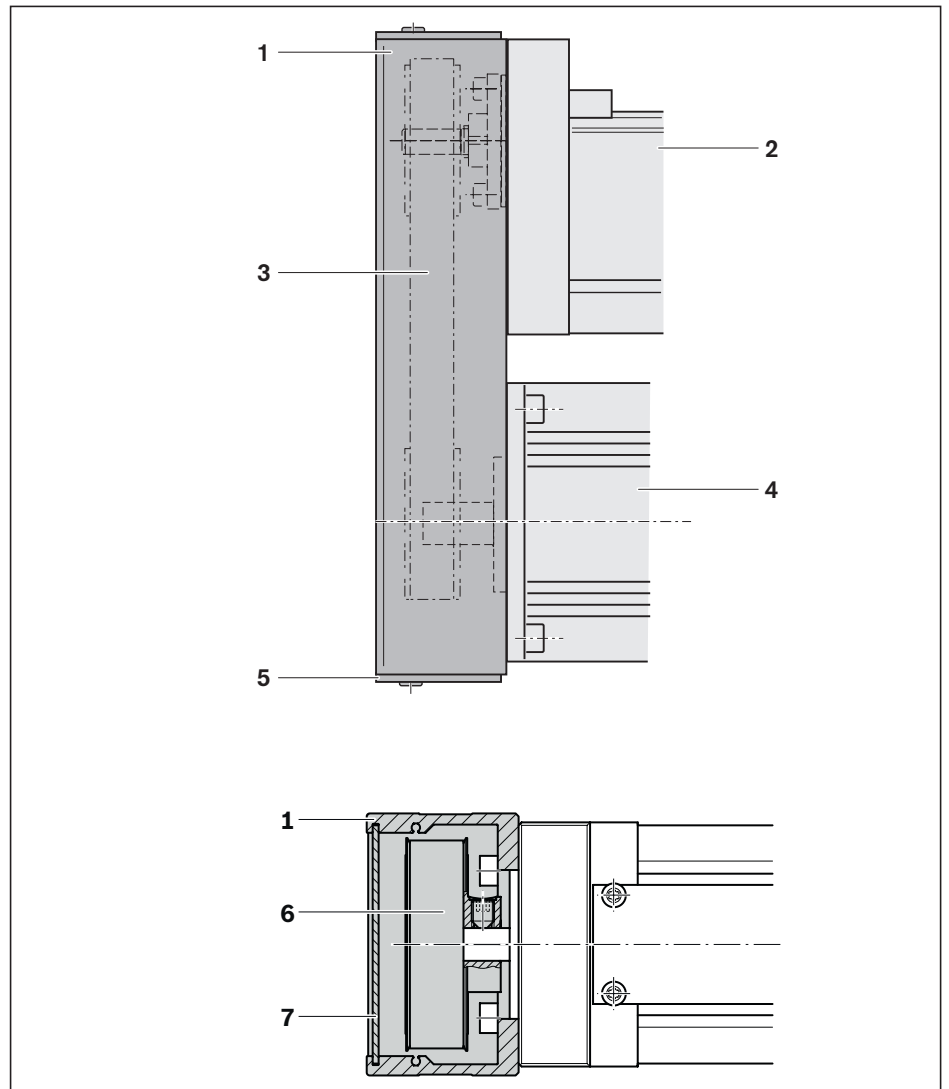

Technical data

**General technical data**

Read the sections titled “Calculation” and “General technical instructions”.

FMS	Carriage	BASA d <sub>0</sub> x P			Dynamic characteristics					Maximum permissible loads						
		L <sub>ca</sub> (mm)	d <sub>0</sub> (mm)	P (mm)	Dyn. load ratings			Dyn. load moments		Max. permissible moments			Max. permissible forces			
					C (N)	C <sub>bs</sub> (N)	C <sub>fb</sub> (N)	M <sub>t</sub> (Nm)	M <sub>L</sub> (Nm)	M <sub>x max</sub> (Nm)	M <sub>y max</sub> (Nm)	M <sub>z max</sub> (Nm)	F <sub>x max</sub> (N)	F <sub>y max</sub> (N)	F <sub>z1 max</sub> (N)	F <sub>z2 max</sub> (N)
<b>-065-SN-1</b>	In preparation															
<b>-080-SN-1</b>	160	16	5	23,700	8,900	13,050	240	910	35	135	135	2,550	3,500			
			10		8,600							2,050				
			16		6,000							1,610				
<b>-110-DN-1</b>	140	16	5	24,000	8,900	13,050	970	890	140	130	130	2,550	2,200	3,600	3,600	
			10		8,600							2,050				
			16		6,000							1,610				
<b>-145-DN-1</b>	In preparation															

<sup>1)</sup> Minimum required travel to ensure a reliable lubrication distribution.  
 For operating conditions, see the section titled “Additional information”.  
 If values are not met, please contact Bosch Rexroth.

For short product names, see the section titled “Additional information”.

	Additional length $L_{ad}$ (mm)	Min. travel range $s_{min}^{1)}$ (mm)	Max. travel range $s_{max}$ (mm)	Max. length $L_{max}$ (mm)	Application point of the effective force $z_1$ (mm)	Moved system mass $m_{ca}$ (kg)	Constant mass calculation		Planar moment of inertia	
							$k_g \text{ fix}$ (kg)	$k_g \text{ var}$ (kg/mm)	$I_y$ (cm <sup>4</sup> )	$I_z$ (cm <sup>4</sup> )
	35	150	1,500	1,695	78.2	1.85	1.31	0.009	154.42	184.96
						1.88				
						1.93				
	35	120	1,500	1,675	59.3	1.76	1.38	0.010	89.07	349.08
						1.78				
						1.83				

## Technical data

### Drive data

Read the sections titled “Calculation” and “General technical instructions”.

FMS	BASA	Moved system mass	Constant mass moment of inertia			Frictional torque <sup>1)</sup>	Max. acceleration	Max. drive torque $M_p$ (Nm)	Max. permissible speed $v_{max}$ (m/s)
			$d_0 \times P$ (mm)	$m_{ca}$ (kg)	$k_{J \text{ fix}}$ (kgmm <sup>2</sup> )				
<b>-065-SN-1</b>	In preparation								
<b>-080-SN-1</b>	16 x 5	1.85	9.648	0.031	0.630	0.3	40	See graphs	See graphs
	16 x 10	1.88	13.232	0.031	2.530				
	16 x 16	1.93	20.985	0.034	6.480				
<b>-110-DN-1</b>	16 x 5	1.76	9.585	0.031	0.630	0.3	40	See graphs	See graphs
	16 x 10	1.78	12.979	0.031	2.530				
	16 x 16	1.83	20.337	0.034	6.480				
<b>-145-DN-1</b>	In preparation								

<sup>1)</sup> at 200 rpm

For short product names, see the section titled “Additional information”.

**Drive data for motor attachment via timing belt side drive**

FMS	BASA	Length	Permissible torque $M_{sd}^{2)}$ (Nm)				Reduced mass moment of inertia				Frictional torque	Mass	
			Motor		Motor		$J_{sd}$		$J_{sd}$				
	$d_0 \times P$	up to L <sup>1)</sup>	MSM031C ECMA-C10604 ECMA-C20604	MSM041B ECMA-C10807 ECMA-C20607	MSM031C ECMA-C10604 ECMA-C20604	MSM041B ECMA-C10807 ECMA-C20607	$M_{Rsd}$		$m_{sd}$				
	(mm)	(mm)	(Nm)	(Nm)	( $10^{-6}$ kgm <sup>2</sup> )	( $10^{-6}$ kgm <sup>2</sup> )	(Nm)		(kg)				
-065-SN-1	In preparation												
-080-SN-1			<b>i = 1</b>	<b>i = 1.5</b>	<b>i = 1</b>	<b>i = 1.5</b>	<b>i = 1</b>	<b>i = 1.5</b>	<b>i = 1</b>	<b>i = 1.5</b>		<b>i = 1</b>	<b>i = 1.5</b>
	16 x 5	1,050	2.25	1.50	2.25	1.50	54.4	137.1	56.63	139.32	0.15	1.02	1.12
	16 x 10	1,200	3.63	2.42	3.63	2.42							
	16 x 16	1,350	4.56	3.04	4.56	3.04							
-110-DN-1			<b>i = 1</b>	<b>i = 1.5</b>	<b>i = 1</b>	<b>i = 1.5</b>	<b>i = 1</b>	<b>i = 1.5</b>	<b>i = 1</b>	<b>i = 1.5</b>		<b>i = 1</b>	<b>i = 1.5</b>
	16 x 5	1,050	2.25	1.50	2.25	1.50	54.4	137.1	56.63	139.32	0.15	1.02	1.12
	16 x 10	1,200	3.63	2.42	3.63	2.42							
	16 x 16	1,350	4.56	3.04	4.56	3.04							
-145-DN-1	In preparation												

<sup>1)</sup> For greater lengths, the permissible drive torque is determined from the length-variable value  $M_p$  of the Linear Motion System in accordance with the graph. See the section titled "Basis of calculation".

<sup>2)</sup> Values for  $M_{sd}$  do not factor in motor torque.

**Drive data for motor attachment via mount and coupling**

FMS	Coupling			Mount and coupling	
	$M_{cN}$	$J_c$	$m_c$		$m_{fc}$
	(Nm)	( $10^{-6}$ kgm <sup>2</sup> )	(kg)		(kg)
-065-SN-1	In preparation				
-080-SN-1	12.5		40	0.2	0.4
-110-DN-1	12.5		40	0.2	0.4
-145-DN-1	In preparation				


**Maximum permissible drive torque for mechanical group  $M_p$**

The values for  $M_p$  apply under the following conditions:

- ▶ Horizontal operation
- ▶ No radial load on screw journal

Factor in the rated torque of the coupling being used.


**FMS-080-SN-1/-110-DN-1**

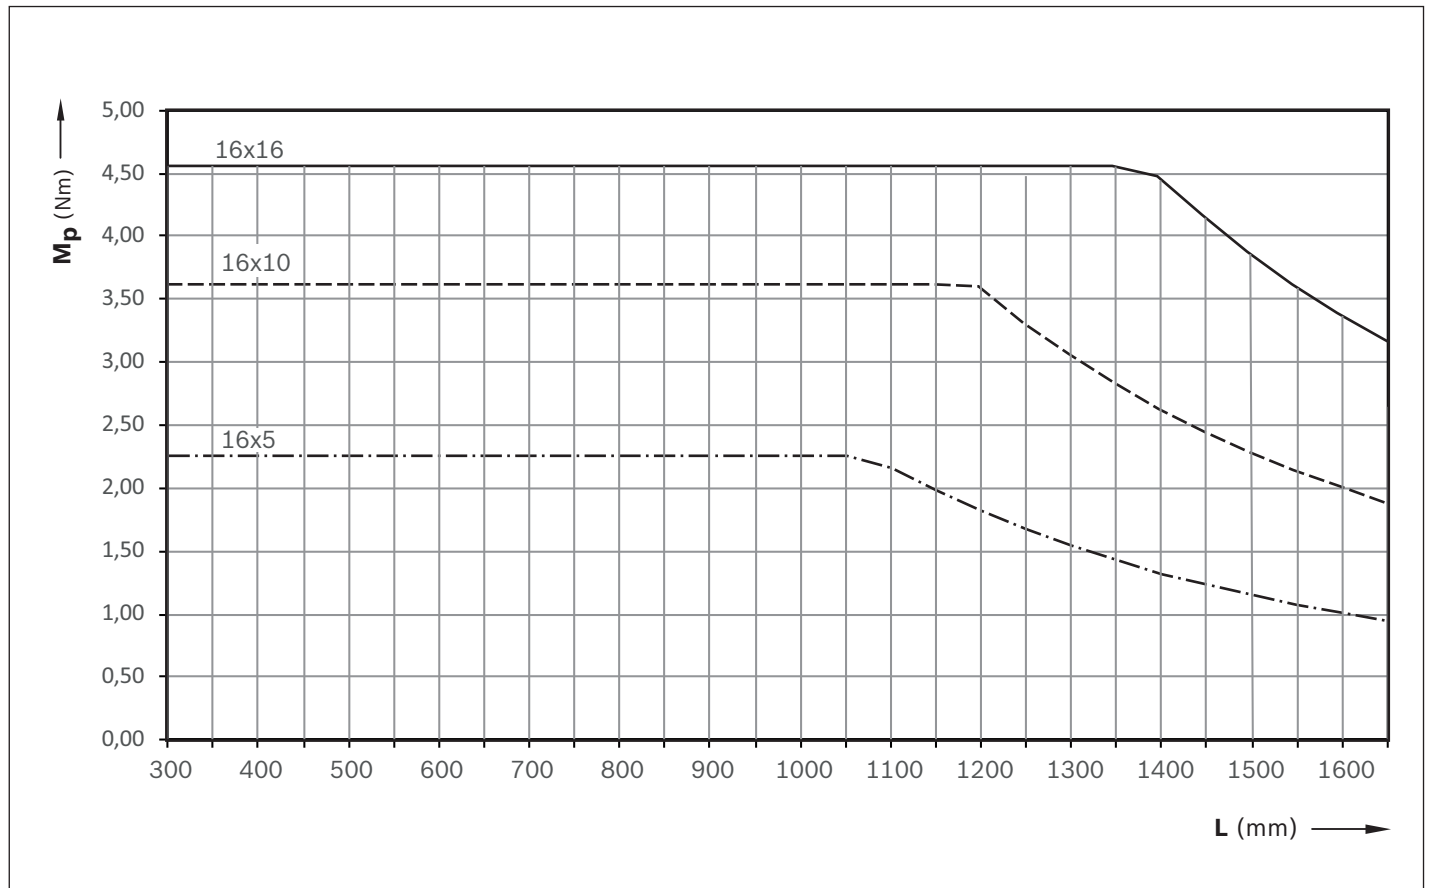

**Maximum permissible speed of mechanical system  $v_{max}$**

Observe motor speed!


FMS-080-SN-1/-110-DN-1

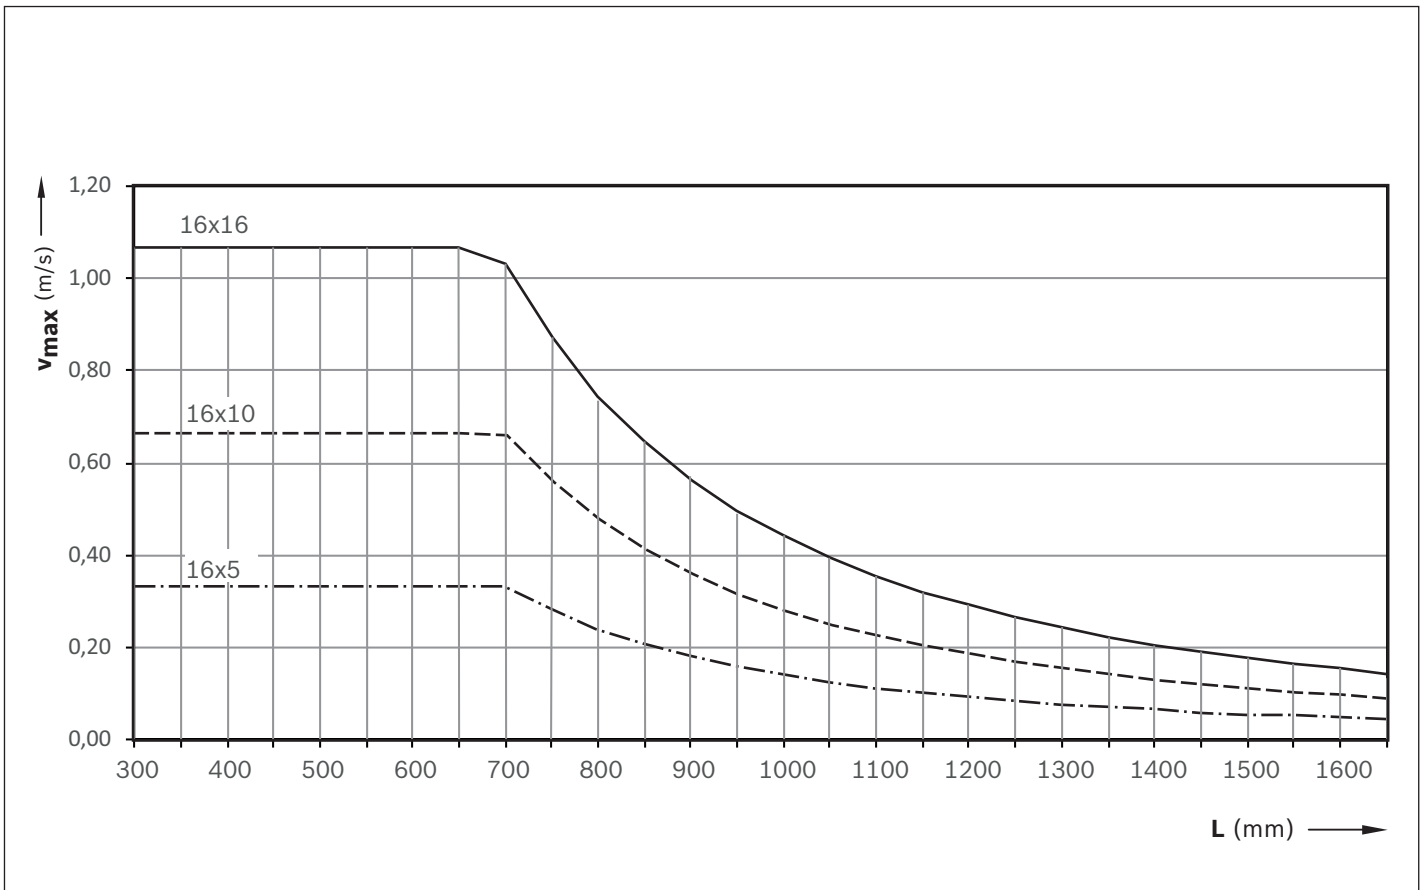

Calculation

<b>Calculation principles</b>	<b>22</b>
<b>Maximum permissible loads</b>	<b>22</b>
<b>Linear guideway life</b>	<b>23</b>
<b>Ball Screw Assembly/fixed bearing life</b>	<b>24</b>
<b>Drive dimensioning</b>	<b>24</b>
<b>Principles</b>	<b>24</b>
<b>Drive dimensioning with motor shaft as reference point</b>	<b>25</b>
<b>General motor preselection</b>	<b>27</b>
<b>Sample calculation</b>	<b>78</b>

**Calculation principles**

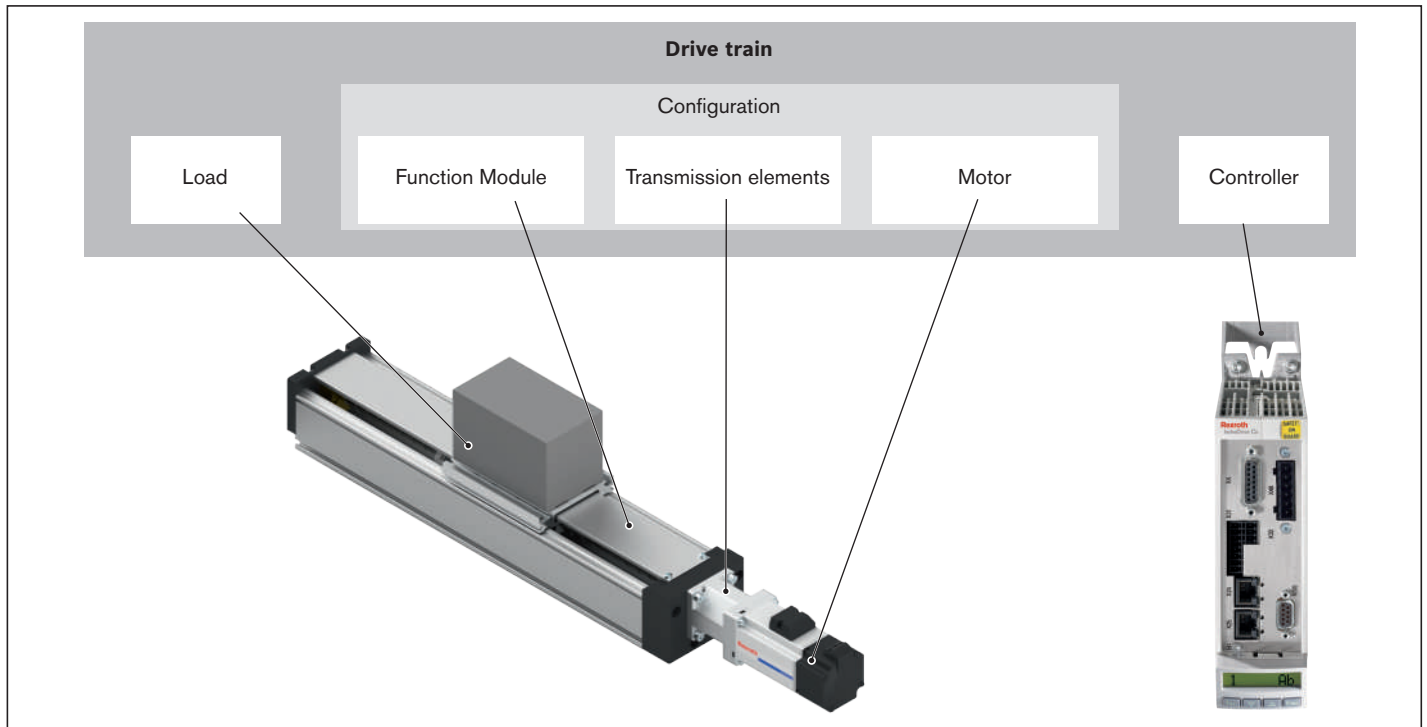

The correct dimensioning and assessment of an application requires structured consideration of the drive train as a whole. The basic element of the drive train is the configuration – made up of the Linear Motion System, the transmission element (coupling or timing belt side drive) and the motor – which can be ordered in that constellation in the catalog.

**Maximum permissible loads**

When selecting a Linear Motion System, the maximum permissible loads and forces must be taken into account and can be found in the section “Technical Data”. The values specified there depend on the system. In other words, the tolerances are determined not only by the load ratings of the bearing points but also include tolerances depending on design and material.

**Conditions for combined loads**

$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

**Linear guideway life**


The life of the rolling bearing points contained in a Linear Motion System can be calculated using the formulas given below. The roller bearings that determine the life of a Linear Motion System with Ball Screw Assembly are the linear guideway, the Ball Screw Assembly (nut) and the fixed bearing.

**⚠ The life of the Linear Motion System is the separately calculated life that is the shortest (for linear guideway, Ball Screw Assembly or fixed bearing).**

The linear guideway in the Linear Motion System must withstand the load as well as any process forces that occur.

**Combined equivalent load on bearing of the guideway**

$$F_{\text{comb}} = F_y + F_z + C \cdot \frac{|M_x|}{M_t} + C \cdot \frac{|M_y|}{M_L} + C \cdot \frac{|M_z|}{M_L}$$

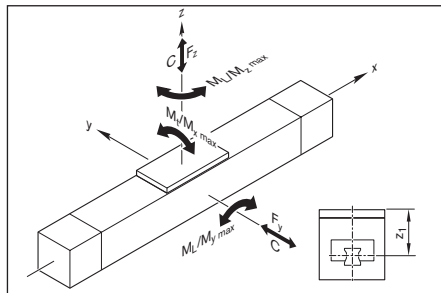

**Nominal life in meters**

$$L = \left( \frac{C}{f_w \cdot F_{\text{comb}}} \right)^3 \cdot 10^5 \text{ m}$$

Impact loads and vibrations cause additional loads on the contact point between ball and running track. Determining the exact conditions of use is difficult. However, the additional loads increase as travel velocity increases. The load factor  $f_w$  (see table) factors in the effects of impacts and vibrations on life.

Conditions of use	Travel velocity	Load factor $f_w$
No impact loads and vibrations	$v < 0.25 \text{ m/s}$	1.0 ... 1.2
Low impact loads and vibrations	$0.25 \text{ m/s} \leq v < 1 \text{ m/s}$	1.2 ... 1.5
Moderate impact loads and vibrations	$1 \text{ m/s} \leq v < 2 \text{ m/s}$	1.5 ... 2.0
High impact loads and vibrations	$v \geq 2 \text{ m/s}$	2.0 ... 3.5


**Nominal life in hours**

$$L_h = \frac{L}{3\,600 \cdot v}$$

**Ball Screw Assembly/fixed bearing life**

Under variable operating conditions (variable rotary speed and load), the means  $F_m$  and  $n_m$  have to be used when calculating life.

If rotary speed varies, average rotary speed  $n_m$  is calculated as follows:

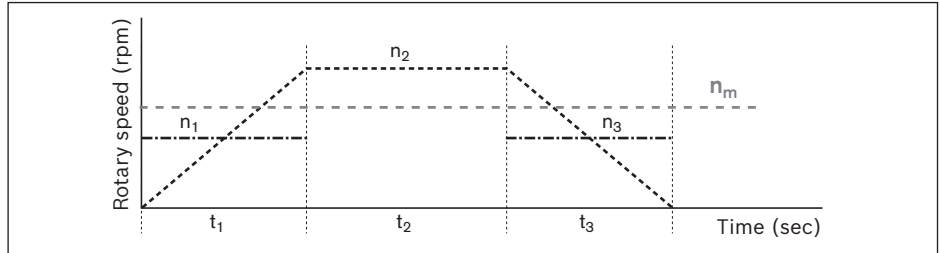


$$n_m = \frac{|n_{1}| \cdot t_1 + |n_{2}| \cdot t_2 + \dots + |n_n| \cdot t_n}{t_{total}}$$

$$t_{total} = t_1 + t_2 + \dots + t_n$$

Rotary speed in acceleration and braking phases  $n_1 \dots n_n$ :

$$n_{1 \dots n} = \frac{n_{A1 \dots n} + n_{E1 \dots n}}{2}$$

When both the load and the rotary speed vary, the average load  $F_m$  is calculated as follows:

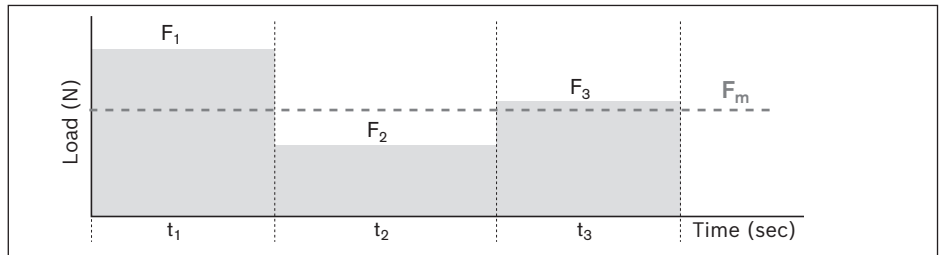

$$F_m = \sqrt[3]{|F_1|^3 \cdot \frac{|n_1|}{n_m} \cdot \frac{t_1}{t_{ges}} + |F_2|^3 \cdot \frac{|n_2|}{n_m} \cdot \frac{t_2}{t_{ges}} + \dots + |F_n|^3 \cdot \frac{|n_n|}{n_m} \cdot \frac{t_n}{t_{ges}}}$$

**Nominal life**

Nominal life in revolutions:

$$L = \left(\frac{C}{F_m}\right)^3 \cdot 10^6$$

Nominal life in hours:

$$L_h = \frac{L}{n_m \cdot 60}$$

**Drive dimensioning**

**Principles**


For drive dimensioning, the drive train can be divided into the mechanical system and the drive system.

The **mechanical** system includes the physical components – Linear Motion System and the transmission elements (timing belt side drive, coupling) – and the load to be carried.

The electric **drive** is a motor/controller combination with corresponding performance data.

The dimensioning of the electric drive is done taking the motor shaft as a reference point.

For drive dimensioning, limits must be taken into account as well as base values. The limits must not be exceeded in order to avoid damaging the mechanical components.

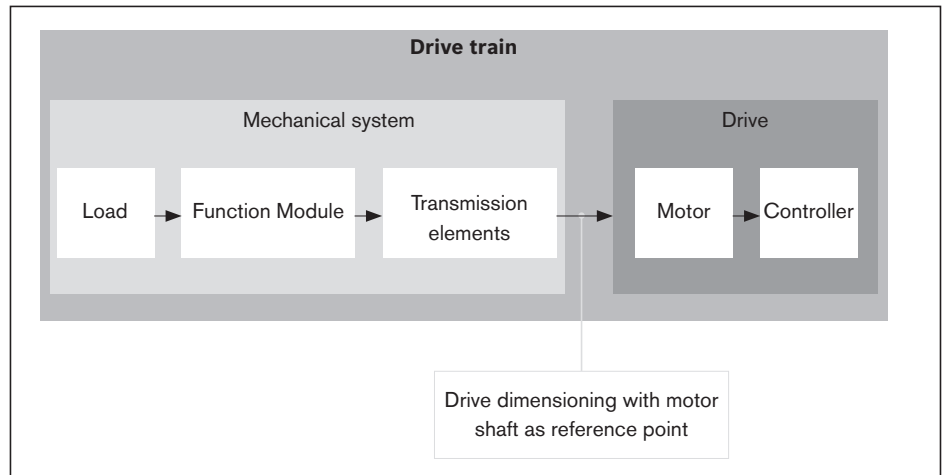

**Technical data and formula symbols for the mechanical system**

For every component (Linear Motion System, coupling, timing belt side drive), the corresponding maximum permissible limits for drive torque and speed, and the base values for friction moment and mass moment of inertia have to be used. The following technical data with the associated formula symbols are used when considering the basic **mechanical** system requirements in the design calculations for dimensioning the drive. The data listed in the table below can be found in the section titled “Technical Data” or is determined using formulas based on the descriptions on the following pages.

	Mechanical system				
	Load	Linear Motion System	Transmission elements		
			Coupling	Timing belt side drive	
<b>Weight moment</b> (Nm)	$M_g^{6)}$	—	—	—	—
<b>Frictional torque</b> (Nm)	— <sup>5)</sup>	$M_{Rs}^{3)}$	—	—	$M_{Rsd}^{3)}$
<b>Mass moment of inertia</b> (kgm <sup>2</sup> )	$J_t^{1)}$	$J_s^{2)}$	$J_c^{3)}$	—	$J_{sd}^{3)}$
<b>Max. permissible speed</b> (m/s)	—	$v_{max}^{4)}$	—	—	—
<b>Max. permissible drive torque</b> (Nm)	—	$M_p^{4)}$	$M_{cN}^{3)}$	—	$M_{sd}^{3)}$

1) Determine the value using the appropriate formula  
 2) Length-dependent value, determined using the appropriate formula  
 3) Use the value from the table

4) Length-dependent value, to be read off the graph  
 5) Any additional process forces are to be taken into consideration as load moments  
 6) For vertical mounting position: Determine the value using the appropriate formula

**Drive dimensioning with motor shaft as reference point**

When dimensioning the drive, all relevant design calculation values for the mechanical components in the drive train have to be determined and be expressed/reduced to the motor shaft. For a combination of mechanical components within the drive train, this will result in one value for each of the following:

- ▶ Frictional torque  $M_R$
- ▶ Mass moment of inertia  $J_{ex}$
- ▶ Maximum permissible speed  $v_{mech}$  (maximum permissible rotary speed  $n_{mech}$ )
- ▶ Max. permissible drive torque  $M_{mech}$

**Determination of the values for each mechanical component in the drive train based on the motor shaft as a reference point**

**Frictional torque  $M_R$**

For motor attachment via mount and coupling

$$M_R = M_{Rs}$$

For motor attachment via timing belt side drive

$$M_R = M_{Rsd} + \frac{M_{Rs}}{i}$$

**Mass moment of inertia  $J_{ex}$**

For motor attachment via mount and coupling

$$J_{ex} = J_s + J_t + J_c$$

For motor attachment via timing belt side drive

$$J_{ex} = J_{sd} + \frac{(J_s + J_t)}{i^2}$$

Determination of mass moment of inertia of Linear Motion System components

$$J_s = (k_{J \text{ fix}} + k_{J \text{ var}} \cdot L) \cdot 10^{-6}$$

Determination of translatory mass moment of inertia of external load

$$J_t = m_{ex} \cdot k_{J m} \cdot 10^{-6}$$

**Maximum permissible speed  $v_{mech}$**

The lowest of all the values for the maximum permissible speed of all mechanical components contained in the drive train determines the maximum permissible speed of the mechanical system which has to be taken into consideration as the upper limit for the drive when dimensioning the motor. Depending on the system, the maximum permissible speed/rotary speed of the Linear Motion System with Ball Screw Assembly is always below the limits for the coupling or timing belt side drive components, meaning it determines the maximum permissible speed of the mechanical system.

**Maximum permissible speed**

$$v_{mech} = v_{max}$$

**Maximum permissible rotary speed**

For motor attachment via mount and coupling

$$n_{mech} = \frac{v_{mech} \cdot 1,000 \cdot 60}{P}$$

For motor attachment via timing belt side drive

$$n_{mech} = \frac{v_{mech} \cdot i \cdot 1,000 \cdot 60}{P}$$

**Max. permissible drive torque  $M_{mech}$**

The lowest (minimum) of all the values for permissible drive torque of all mechanical components contained in the drive train determines the maximum permissible drive torque of the mechanical system which has to be taken into consideration as the upper limit for the drive when sizing the motor.

For motor attachment via mount and coupling

$$M_{mech} = \text{minimum} (M_{cN}; M_p)$$

For motor attachment via timing belt side drive

$$M_{mech} = \text{minimum} (M_{sd}; \frac{M_p}{i})$$

**⚠ When considering the complete drive train (mechanical system + motor/controller), the maximum torque of the motor can lie below the maximum value for the mechanical system ( $M_{mech}$ ) and thus limit the maximum permissible drive torque of the overall drive train.**

**If the maximum torque of the motor lies above the upper limit for the mechanical system ( $M_{mech}$ ), the maximum motor torque must be limited to the permitted value for the mechanical system.**

**General motor preselection**

The motor can be generally preselected using the following conditions:

**Condition 1:**

The rotary speed of the motor must be greater than or equal to the rotary speed required for the mechanical system (but not exceeding the maximum permissible limit value).

$$n_{max} \geq n_{mech}$$

**Condition 2:**

Consideration of the ratio of mass moments of inertia of the mechanical system and the motor. The ratio of the mass moments of inertia serves as an indicator for the control performance of a motor/controller combination. The mass moment of inertia of the motor is directly related to the motor size.

Ratio of mass moments of inertia

$$V = \frac{J_{ex}}{J_m + J_{br}}$$

For pre-selection, past experience has shown the values opposite will result in high control performance.

These are not rigid limits, but values exceeding them will require closer consideration of the specific application.

Application area	V
Handling	≤ 6.0
Processing	≤ 1.5

**Condition 3:**

Estimation of the ratio of the static load moment to the continuous torque of the motor. The torque ratio must be less than or equal to an empirical value of 0.6. This condition roughly factors in the missing dynamic characteristics of an exact motion profile with the required motor torques.

Torque ratio

$$\frac{M_{stat}}{M_0} \leq 0.6$$

Static load moment

$$M_{stat} = M_R + M_g$$

Weight moment

**For vertical mounting only!**

$$M_g = \frac{P \cdot (m_{ex} + m_{ca}) \cdot g}{2,000 \cdot \pi \cdot i}$$

For motor attachment via mount and coupling:  $i = 1$

In the section titled “Configuration and ordering”, users can put together standard configurations, including motor attachment and motor, for the various Linear Motion System sizes by selecting the appropriate options. By checking the above conditions, it is possible to see whether a standard motor selected in a particular configuration will generally be of a suitable size for the specific application.








**Precise drive dimensioning**

Preselecting the motor according to this rough guide is no substitute for the required precise design calculations for the drive, taking all moments/torques and rotary speed levels into account. For precise calculation of the electric drive, including consideration of the specific motion profile, please refer to the performance data in the catalog “Rexroth Drive technology”.

When dimensioning the drive, the maximum permitted values for linear speed, drive torque and acceleration must not be exceeded, in order to avoid damaging the mechanical system.

Configuration and ordering

**FMS-080-SN-1**

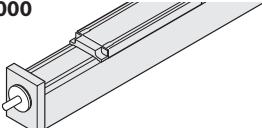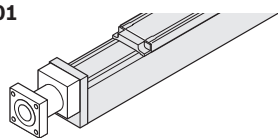$s_{max.}^{1)}$ (mm)	Carriage	Guideway 	Drive			Version		
			Screw journal	BASA size $d_0 \times P$				
$L_{ca} = 160 \text{ mm}$				16x5	16x10	16x16		
$s_{max}^=$	002	001	Ø 11	001	011	021	F000 	
							F001 	
							S000 	S090 
							S180 	S270 


<sup>1)</sup> Travel range  $s_{max}$  dependent on length L and option selection.  $\Rightarrow$  Section "General technical instructions".

<sup>2)</sup> Coverage up to a length L = 1,500 m available.

Mounting interface		Motor			Motor connector position	Cover <sup>2)</sup>		Documentation	
Ratio i =	Mechanical interface	Motor code	without Brake	with Brake		without Cover plate	with Cover plate	Standard report	
-	000	-	000						
i = 1	011	MSM031C-0300	138	139	000	000	010	001	
		ECMA-C20604	182	183					
		ECMA-C10604	192	193					
	013	MSM041B-0300	140	141					
		ECMA-C20807	184	185					
		ECMA-C10807	194	195					
i = 1	021	MSM031C-0300	138	139					090
		ECMA-C20604	182	183					
		ECMA-C10604	192	193					
i = 1,5	031	MSM031C-0300	138	139					180
		ECMA-C20604	182	183					
		ECMA-C10604	192	193					
i = 1	023	MSM041B-0300	140	141	270				
		ECMA-C20807	184	185					
		ECMA-C10807	194	195					
i = 1,5	033	MSM041B-0300	140	141					
		ECMA-C20807	184	185					
		ECMA-C10807	194	195					


Length calculation → Section “General technical instructions”

Mount	Motor connector position			
	0°	90°	180°	270°
F001	✓	✓★	✓	✓



Example:  
Mount F001  
Motor connector position 90°








Timing belt side drive	Motor connector position			
	0°	90°	180°	270°
S000	-	090	180★	270
S090	000	090★	180	-
S180	000★	090	-	270
S270	000	-	180	270★



Example:  
Timing belt side drive S270  
Motor connector position 180°

★ standard delivery (connector orientation)

**FMS-110-DN-1**

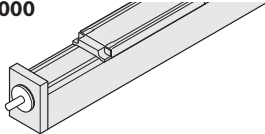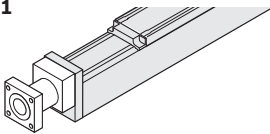$s_{max.}^{1)}$ (mm)	Carriage	Guideway 	Drive			Version		
			Screw journal	BASA size $d_0 \times P$				
$L_{ca} = 160 \text{ mm}$				16x5	16x10	16x16		
$s_{max}^=$	002	001	Ø 11	001	011	021	F000 	
							F001 	
							S000 	S090 
							S180 	S270 


<sup>1)</sup> Travel range  $s_{max}$  dependent on length L and option selection.  $\Rightarrow$  Section "General technical instructions".

<sup>2)</sup> Coverage up to a length L = 1,500 m available.

Mounting interface		Motor			Motor connector position	Cover <sup>2)</sup>		Documentation
Ratio i =	Mechanical interface	Motor code	without with	with without		without with	with without	Standard report
-	000	-		000				
i = 1	011	MSM031C-0300	138	139	000	000	010	001
		ECMA-C20604	182	183				
		ECMA-C10604	192	193				
	013	MSM041B-0300	140	141				
		ECMA-C20807	184	185				
		ECMA-C10807	194	195				
i = 1	021	MSM031C-0300	138	139				
		ECMA-C20604	182	183				
		ECMA-C10604	192	193				
i = 1,5	031	MSM031C-0300	138	139				
		ECMA-C20604	182	183				
		ECMA-C10604	192	193				
i = 1	023	MSM041B-0300	140	141				
		ECMA-C20807	184	185				
		ECMA-C10807	194	195				
i = 1,5	033	MSM041B-0300	140	141				
		ECMA-C20807	184	185				
		ECMA-C10807	194	195				


Length calculation → Section “General technical instructions”

Mount	Motor connector position			
	0°	90°	180°	270°
F001	✓	✓★	✓	✓



Example:  
Mount F001  
Motor connector position 90°

Timing belt side drive	Motor connector position			
	0°	90°	180°	270°
S000	-	090	180★	270
S090	000	090★	180	-
S180	000★	090	-	270
S270	000	-	180	270★





Example:  
Timing belt side drive S270  
Motor connector position 180°

★ standard delivery (connector orientation)

Frame dimension drawings



**FMS-xxx-SN-1 (single-rail)**

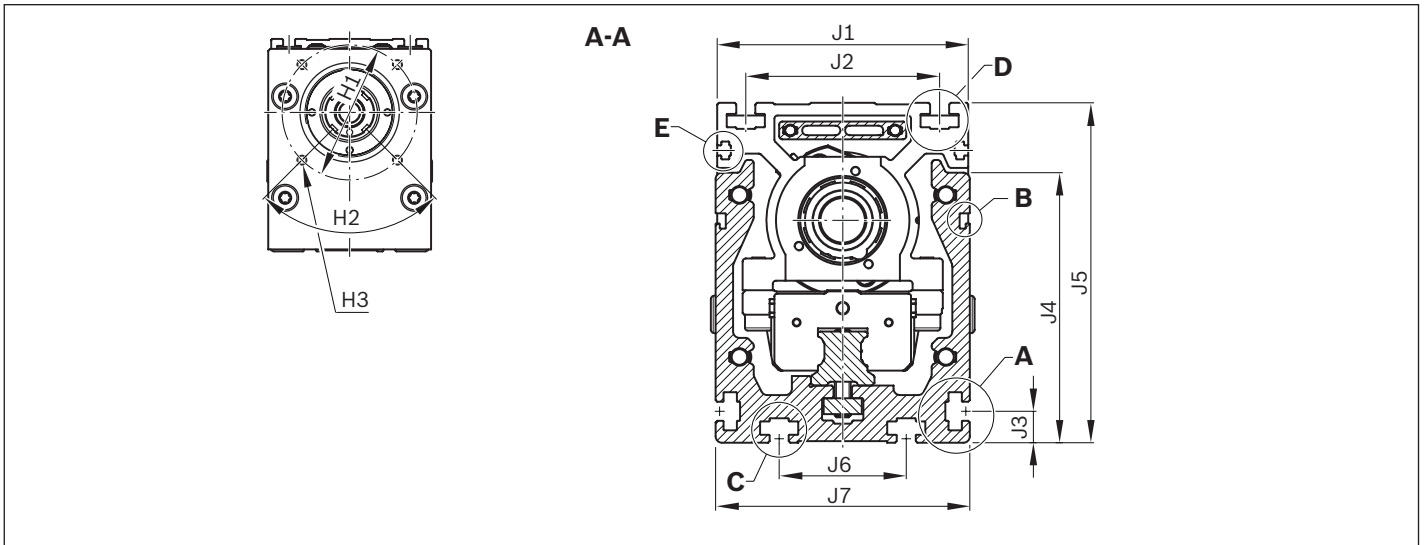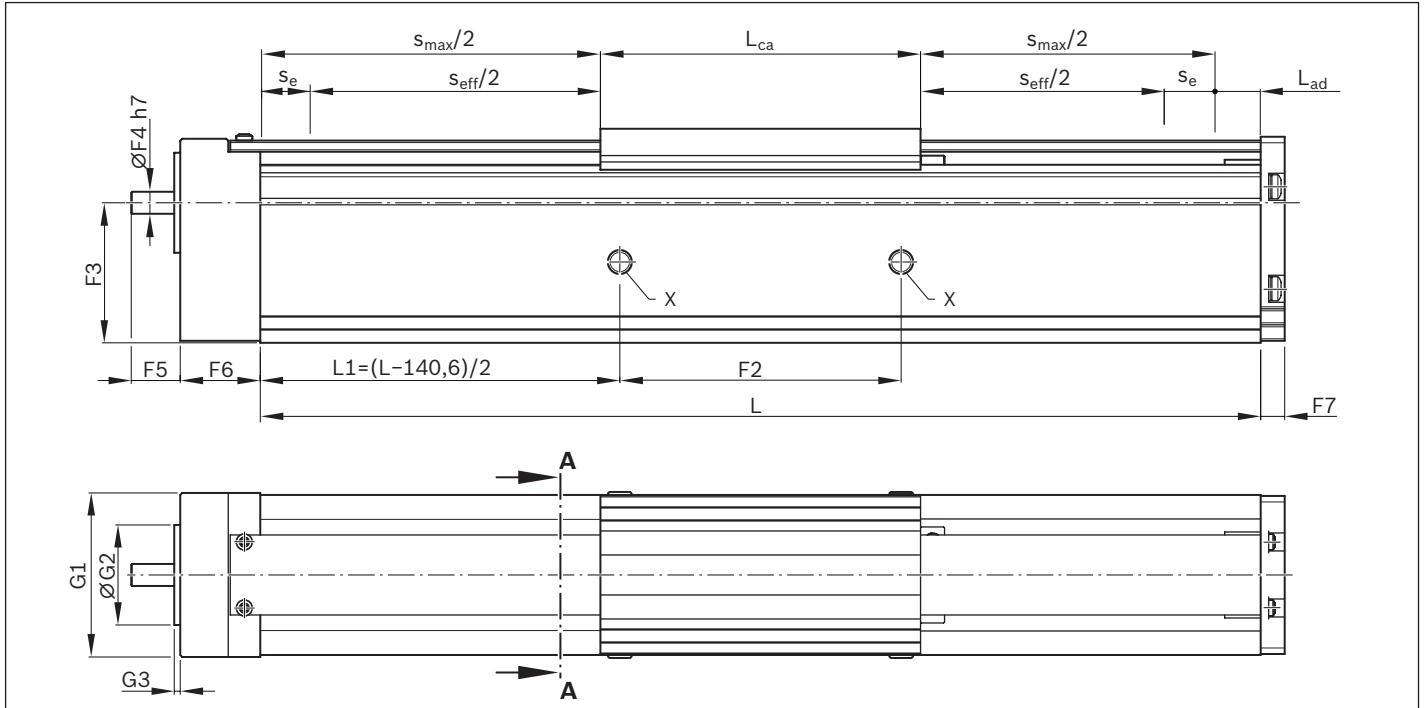

FMS	Dimensions (mm)																				
	F2	F3	F4	F5	F6	F7	G1	G2	G3	H1	H2	H3	J1	J2	J3	J4	J5	J6	J7	$L_{ca}$	$L_{ad}$
-080-SN-1	140.6	70	11	24.5	40	12	82	50	3	68	90°	M5-10 deep (4x)	79	61	9.9	85	107	40	80	160	35

X: Lube fittings (DIN 3405-A funnel-type lube nipple) on both sides for Runner Block grease lubrication.  
 For Ball Screw Assembly lubrication and further information on lubrication, see the section titled "Lubrication".

**FMS-xxx-SN-1 (dual-rail)**

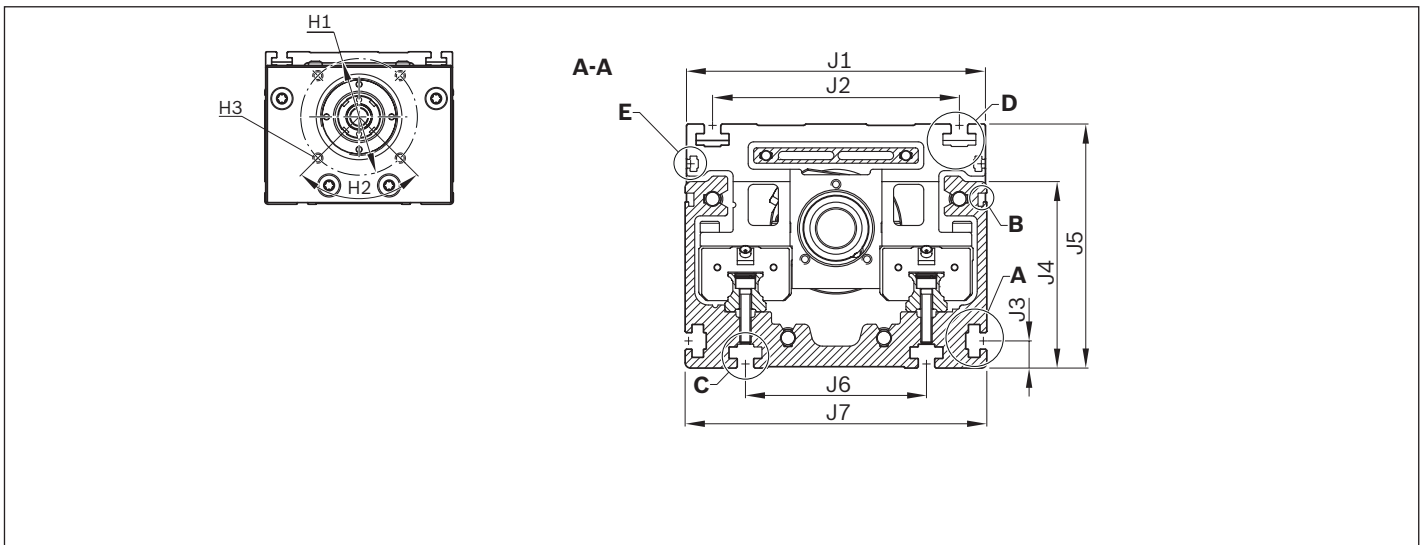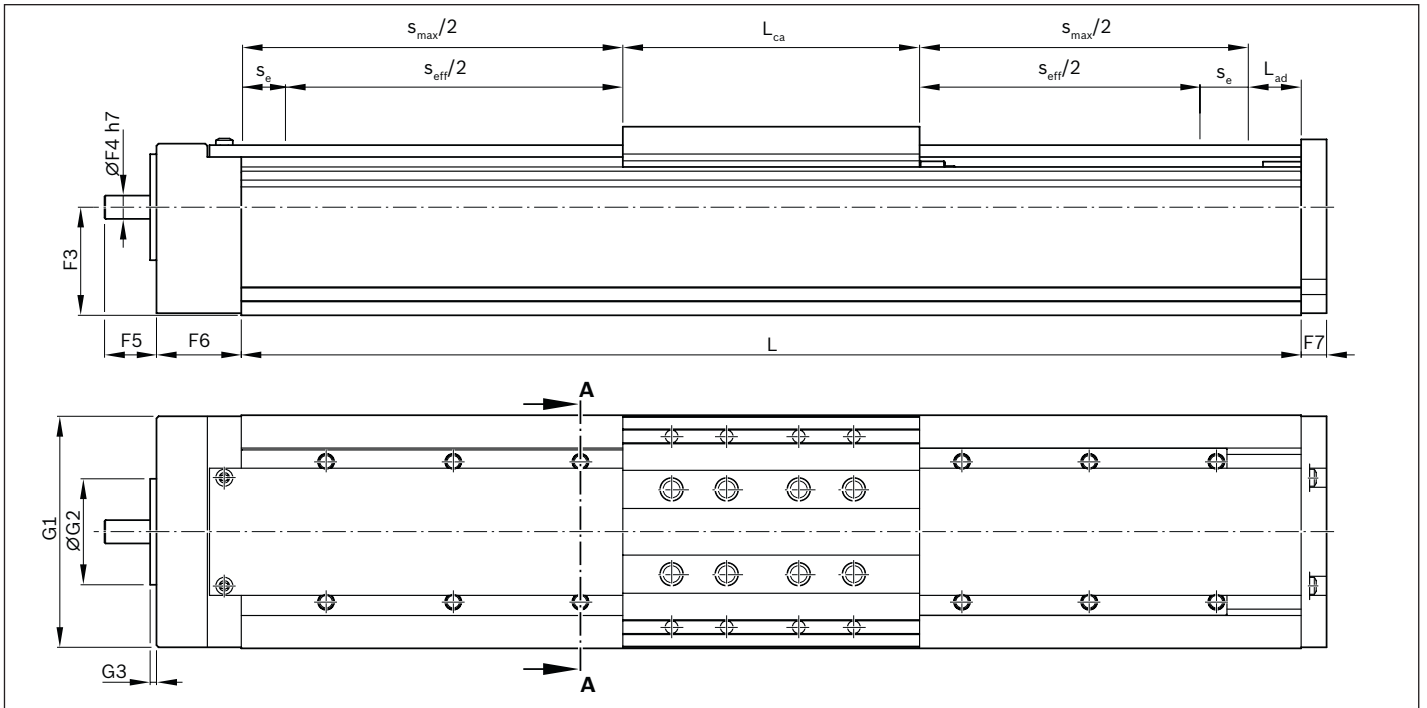


FMS	Dimensions (mm)																			
	F3	F4	F5	F6	F7	G1	G2	G3	H1	H2	H3	J1	J2	J3	J4	J5	J6	J7	$L_{ca}$	$L_{ad}$
-110-DN-1	51	11	24.5	40	12	109	50	3	68	90°	M5-10 deep (4x)	109	90	9.9	68	89	66	110	140	35

Notes: Diagrams use different scales. Exact contours and dimensions can be found in the CAD model. CAD configurator available on the Internet at [www.boschrexroth.com](http://www.boschrexroth.com) "Product configurators".

See below for dimension drawings for motor attachment and details. For short product names, see the section titled "Additional information". For lubrication, see the section titled "Lubrication".

Dimensional drawings of details

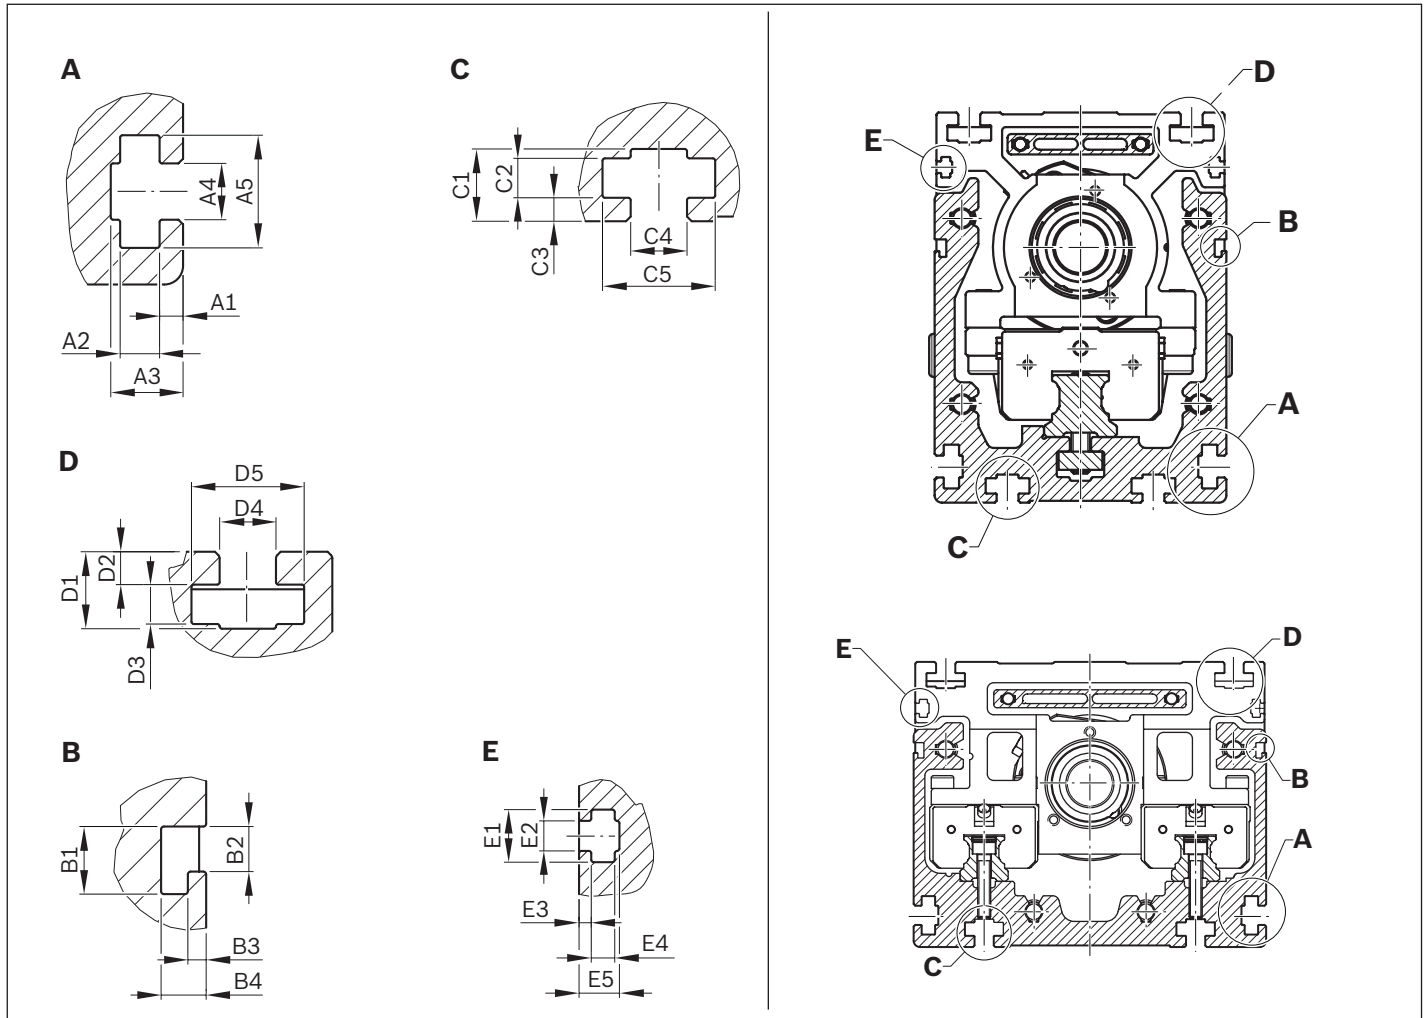


FMS	Dimensions (mm)																								
	A1	A2	A3	A4	A5	B1	B2	B3	B4	C1	C2	C3	C4	C5	D1	D2	D3	D4	D5	E1	E2	E3	E4	E5	
-080-SN-1	2.5	4.2	7.7	6	12	4.8	3.2	1.3	3.2	7.7	4.2	2.5	6	12	8.2	3.5	4.2	6	12	5.6	3.2	1.3	2.5	4.3	
-110-DN-1	2.5	4.2	7.7	6	12	4.8	3.2	1.3	3.2	8.7	4.2	3.5	6	12	8.2	3.5	4.2	6	12	5.6	3.2	1.3	2.5	4.3	


- A** For fastening with clamping fixtures.
- B** For sensor plate (for magnetic/optical sensors).
- C** For fastening with sliding blocks
- D** For customer's attachment
- E** For switching cam (for optical sensor).

Dimension drawings for motor attachment

**Motor attachment via mount and coupling (F001)**

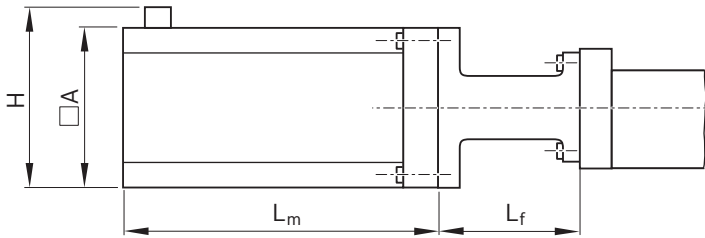

**Motor attachment via timing belt side drive (S000-S270)**

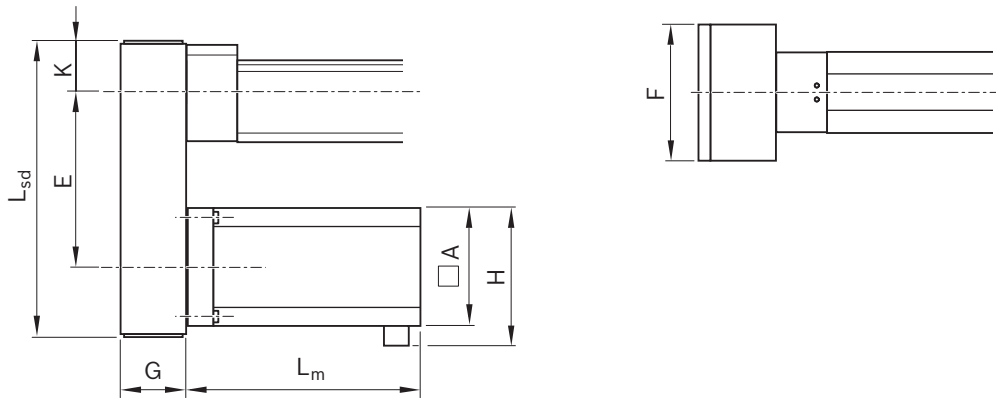

F001	FMS	Motor	Dimensions (mm)				
			□A	H	L <sub>m</sub>		L <sub>f</sub>
					Without brake	With brake	
-080 / -110		MSM 031C	60	73	98.5	135.0	72.0
		ECMA-C20604 ECMA-C10604			130.7	166.8	
		MSM 041B	80	93	112.0	149.0	78.5
		ECMA-C20807 ECMA-C10807			138.3	178.0	

S000 S090 S180 S270	FMS	Motor	Dimensions (mm)							L <sub>m</sub>		L <sub>sd</sub>
			□A	E		F	G	H	K	Without brake	With brake	
				i=1	i=1.5							
-080 / -110		MSM 031C	60	125	122	88	51	73	47.4	98.5	135.0	227.8
		ECMA-C20604 ECMA-C10604								130.7	166.8	
		MSM 041B	80	93	112.0	149.0	138.3	178.0	234.8			
		ECMA-C20807 ECMA-C10807										

# Function Modules FMB

Product description

Structural design/versions

## Features


- ▶ Ready-to-install Function Modules in any length up to  $L_{max}$
- ▶ Extremely compact aluminum frame with integrated Rexroth Ball Rail System (one or two Ball Rail Systems)
- ▶ Ball Rail System with moderate pre-tensioning (pre-tensioning class C1)
- ▶ Pre-tensioned belt drive (HTD 5M)
- ▶ High travel speed of up to 3 m/s
- ▶ Aluminum carriage with T-slots
- ▶ Guideway and drive components protected by aluminum cover plate (up to a length of 1,500 m)
- ▶ Low-cost maintenance thanks to in-service lubrication option (grease lubrication)
- ▶ Repeatability of up to  $\pm 0.05$  mm

## Further highlights

- ▶ Standard with integrated solenoid switch for magnetic field sensors
- ▶ Nameplate with parameters for easy start-up
- ▶ Fastening elements

## Attachments

- ▶ Motor attachment via mount and coupling
- ▶ Planetary gearbox with various gear ratios
- ▶ Maintenance-free servo motors with optional holding brake
- ▶ Magnetic sensor
- ▶ Optical sensors
- ▶ Extensive sensor accessories

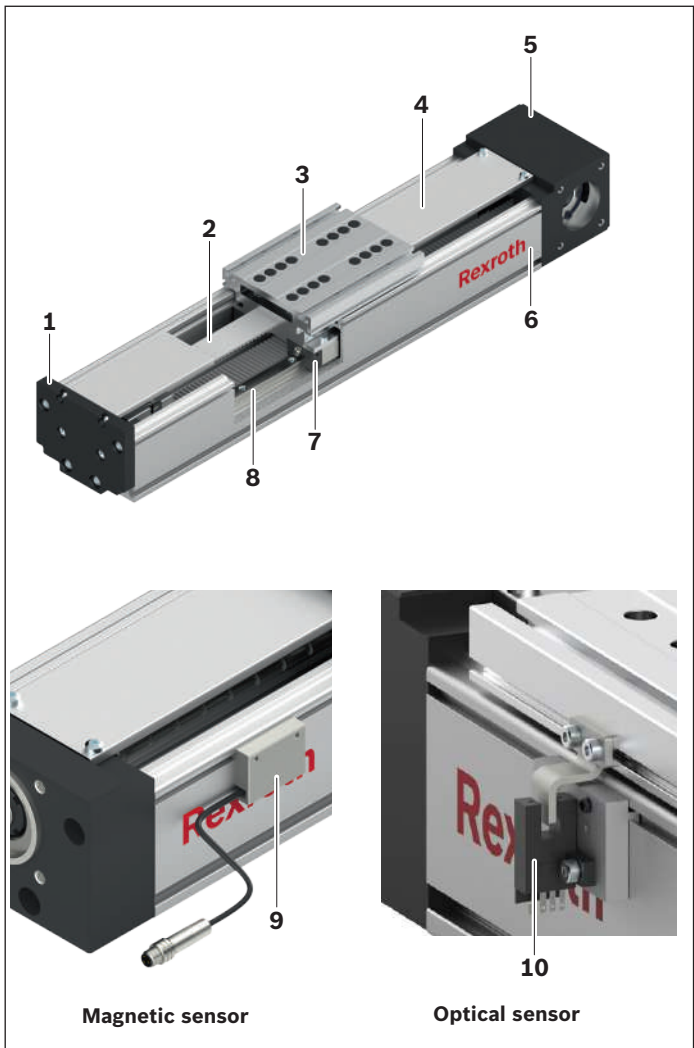

## Structural design

- 1 Idler end end plate
- 2 Toothed belt (covered)
- 3 Carriage with T-slots
- 4 Cover plate
- 5 Drive end enclosure
- 6 Frame
- 7 Runner Block
- 8 Guide Rail


## Attachments/accessories

- 9 Magnetic sensor
- 10 Optical sensor


For further information, see the section titled “Accessories”.

## Versions

Versions with one Ball Rail System  
(single-rail) FMB-xxx-SN-x



Versions with two Ball Rail Systems  
(dual-rail) FMB-xxx-DN-x



Without motor attachment



Motor attachment with ancillary gear



Technical Data

Read the sections titled “Calculation” and “General technical instructions”.

**General technical data**

FMB	Carriage length $L_{ca}$ (mm)	Dyn. characteristics			Maximum permissible loads								Moved system mass $m_{ca}$ (kg)
		Dyn. load ratings <b>C</b> (N)	Dyn. load moments $M_t$ $M_L$ (Nm)		Max. permissible moments $M_{x\ max}$ $M_{y\ max}$ $M_{z\ max}$ (Nm)			Max. permissible forces $F_{x\ max}$ $F_{y\ max}$ $F_{z1\ max}$ $F_{z2\ max}$ (N)					
<b>-065-SN-1</b>	In preparation												
<b>-080-SN-1</b>	160	23,700	240	910	35	135	135	400	3,500	3,500	3,500	1.72	
<b>-110-DN-1</b>	140	24,000	970	940	140	140	140	550	2,200	3,600	3,600	1.71	
<b>-145-DN-1</b>	In preparation												

**Drive data/gear unit data**

FMB	Gear ratio <b>i</b> (-)	Max. acceleration torque (at the gear output) $M_{ge}^{2)}$ (Nm)	Base frictional torque $M_{Rge}$ (Nm)	Max. drive speed $n_{ge}^{2)}$ (rpm)	Mass moment of inertia $J_{ge}$ (kgm <sup>2</sup> )	Weight $m_{ge}$ (kg)
<b>-080-SN-1</b>	3		24	0.15	4,500	0.9
	5		32			
	10		24			
<b>-110-DN-1</b>	3		24	0.15	4,500	0.9
	5		32			
	10		24			
<b>-145-DN-1</b>	In preparation					

FMB	Gear ratio <b>i</b> (-)	Max. drive torque $M_p$ (Nm)	Lead constant <b>u</b> (mm/rev)	Max. speed $v_{max}$ (m/s)	Carriage $L_{ca}$ (mm)
<b>-080-SN-1</b>	1	7.79	110.00	3.00	160.00
	3	2.60	36.67	2.75	
	5	1.56	22.00	1.65	
	10	0.78	11.00	0.83	
<b>-110-DN-1</b>	1	11.48	130.00	3.00	140.00
	3	3.83	43.33	3.00	
	5	2.30	26.00	1.95	
	10	1.15	13.00	0.98	
<b>-145-DN-1</b>	In preparation				

<sup>1)</sup> Minimum required travel to ensure a reliable lubrication distribution. For operating conditions, see the section titled “Additional information”.

If values are not met, please contact Bosch Rexroth.

<sup>2)</sup> The limits of the Linear Motion System must not be exceeded. For more information about calculations, see the section titled “Basis of calculations”.

<sup>3)</sup> Maximum force that can be transmitted via the teeth meshing with the belt pulley.

<sup>4)</sup> The maximum permitted tensile load on the belt cross section (belt elasticity limit) is given here for easier comparability. This value represents the load limit in terms of plastic deformation and may not be used to calculate the maximum permissible drive torque.


	Constant mass calculation		Additional length $L_{ad}$ (mm)	Min. travel range $s_{min}^{1)}$ (mm)	Max. travel range $s_{max}$ (mm)	Max. length $L_{max}$ (mm)	Application point of the effective force $z_1$ (mm)	Planar moments of inertia	
	$k_g \text{ fix}$ (kg)	$k_g \text{ var}$ (kg)/mm						$I_y$ (cm <sup>4</sup> )	$I_z$ (cm <sup>4</sup> )
	1.822	0.008	71	150	3,800	4,031	78.2	154.42	184.96
	2.302	0.009	73	120	3,800	4,013	59.3	89.09	349.08

	Constants - mass moment of inertia			Frictional torque $M_{RS}$ (Nm)	Belt pulley diameter $d_3$ (mm)	Belt type $B_t$	Max. belt driving force $F_{max}^{3)}$ (N)	Belt elasticity limit $F_t \text{ perm}^{4)}$ (N)	Specific spring rate $c_{spe}$ (N)	Max. acceleration $a_{max}$ (m/s <sup>2</sup> )
	$k_J \text{ fix}$ (kgmm <sup>2</sup> )	$k_J \text{ var}$ (kgmm)	$k_{Jm}$ (mm <sup>2</sup> )							
	567.787	0.050	306.497	1.40	35.01	25 - MTD5	445	1700	0.425 x 10 <sup>6</sup>	40
	819.880	0.082	428.082	1.90	41.38	30 - MTD5	555	2000	0.5 x 10 <sup>6</sup>	

## Calculation

<b>Basis of calculations</b>	<b>40</b>
<b>Maximum permissible loads</b>	<b>41</b>
<b>Linear guideway life</b>	<b>41</b>
<b>Drive dimensioning</b>	<b>42</b>
<b>Principles</b>	<b>42</b>
<b>Drive dimensioning with motor shaft as reference point</b>	<b>43</b>
<b>General motor preselection</b>	<b>45</b>

### Basis of calculations

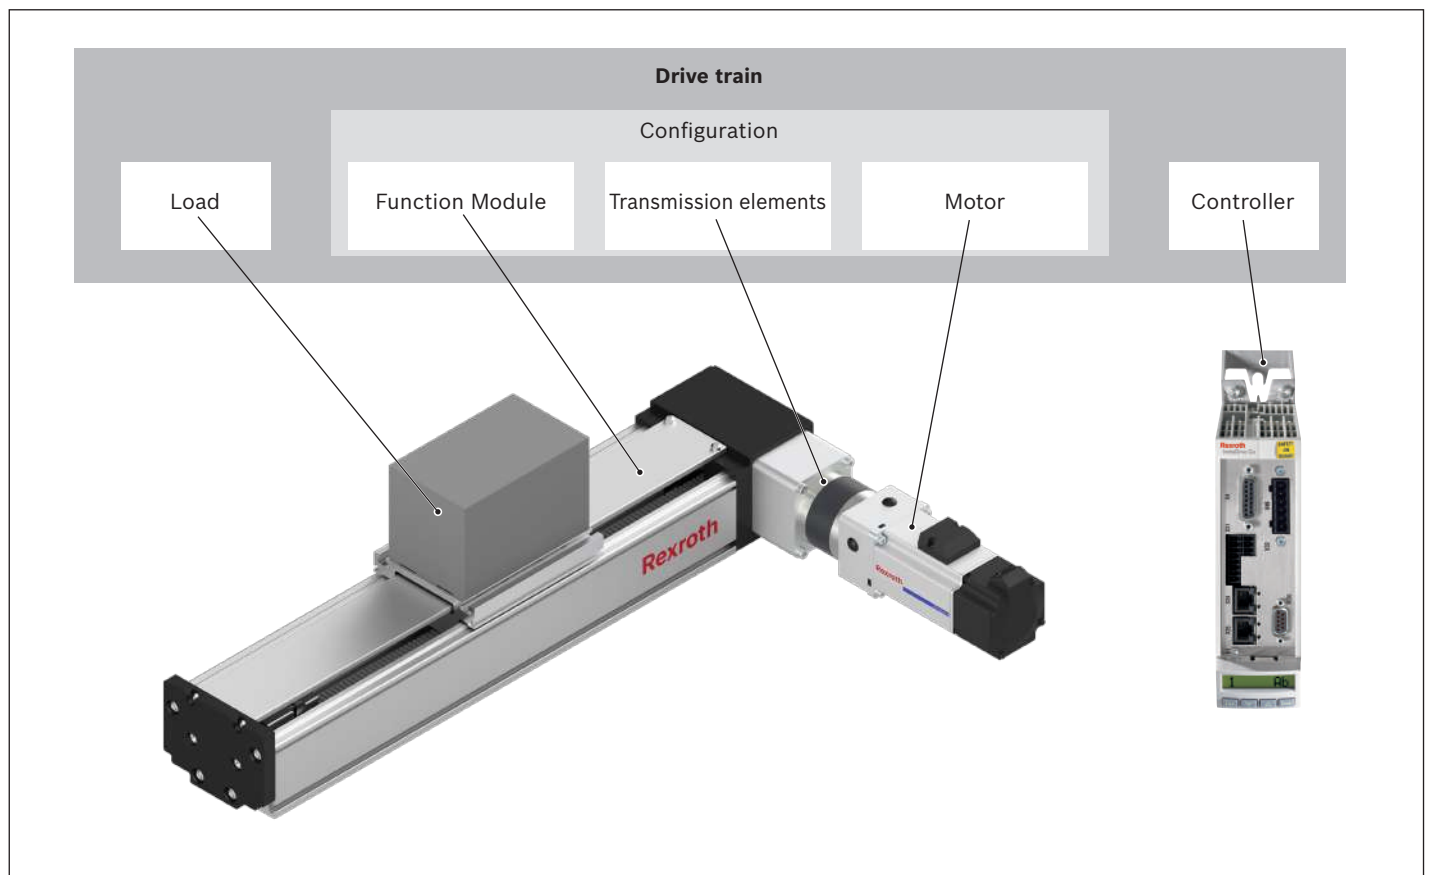

The correct dimensioning and assessment of an application requires structured consideration of the drive train as a whole. The basic element of the drive train is the configuration – made up of the Linear Motion System, the transmission element (gears or directly without transmission element) and the motor – which can be ordered in that constellation in the catalog.

#### Maximum permissible loads

When selecting a Linear Motion System, the maximum permissible loads and forces must be taken into account and can be found in the section “Technical Data”. The values specified there depend on the system. In other words, the tolerances are determined not only by the load ratings of the bearing points but also include tolerances depending on design and material.

**Conditions for combined loads**

$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

**Linear guideway life**


The life of the rolling bearing points contained in a Linear Motion System can be calculated using the formulas given below. The rolling bearing point that is relevant to the life in a Linear Motion System with geared belt drive is generally the linear guideway.

**⚠ The computed life specification for the Linear Motion System is determined by the life specification of the linear guide.**

The linear guideway in the Linear Motion System must withstand the load as well as any process forces that occur.

**Combined equivalent load on bearing of the guideway**

$$F_{\text{comb}} = F_y + F_z + C \cdot \frac{|M_x|}{M_t} + C \cdot \frac{|M_y|}{M_L} + C \cdot \frac{|M_z|}{M_L}$$

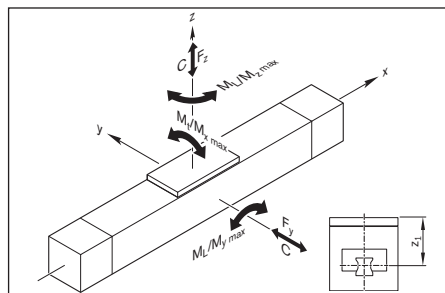

**Nominal life in meters**

$$L = \left( \frac{C}{f_w \cdot F_{\text{comb}}} \right)^3 \cdot 10^5 \text{ m}$$

Impact loads and vibrations cause additional loads on the contact point between ball and running track. Determining the exact conditions of use is difficult. However, the additional loads increase as travel velocity increases. The load factor  $f_w$  (see table) factors in the effects of impacts and vibrations on life.

Conditions of use	Travel velocity	Load factor $f_w$
No impact loads and vibrations	$v < 0.25 \text{ m/s}$	1.0 ... 1.2
Low impact loads and vibrations	$0.25 \text{ m/s} \leq v < 1 \text{ m/s}$	1.2 ... 1.5
Moderate impact loads and vibrations	$1 \text{ m/s} \leq v < 2 \text{ m/s}$	1.5 ... 2.0
High impact loads and vibrations	$v \geq 2 \text{ m/s}$	2.0 ... 3.5

**Nominal life in hours**

$$L_h = \frac{L}{3\,600 \cdot v}$$

## Drive dimensioning


### Principles

For drive dimensioning, the drive train can be divided into the mechanical system and the drive system.

The **mechanical system** includes the physical components – Linear Motion System and the transmission elements (gears or directly without transmission element) – and the load to be carried. The electric **drive** is a motor/controller combination with the appropriate performance data.

The dimensioning of the electric drive is done taking the motor shaft as a reference point.

For drive dimensioning, limits must be taken into account as well as base values. The limits must not be exceeded in order to avoid damaging the mechanical components.

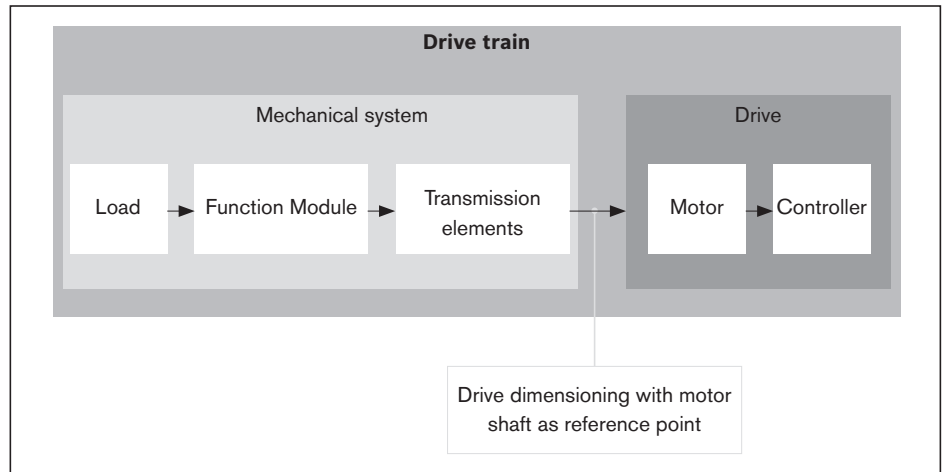

### Technical data and formula symbols for the mechanical system

For each component (Linear Motion System, gears), the relevant maximum permissible values must be identified for the drive torque and travel speed, as well as the basic values for frictional torque and mass moment of inertia ⇒ “Drive data”. The following technical data with the associated formula symbols are used when considering the basic **mechanical system** requirements in the design calculations for dimensioning the drive. The data listed in the table below can be found in the section titled “Technical Data” or is determined using formulas based on the descriptions on the following pages.

		Mechanical system		
		Load	Linear Motion System	Transmission element Gear
<b>Weight moment</b>	(Nm)	$M_g^{5)}$	—	—
<b>Frictional torque</b>	(Nm)	— <sup>4)</sup>	$M_{Rs}^{3)}$	$M_{Rge}^{3)}$
<b>Mass moment of inertia</b>	(kgm <sup>2</sup> )	$J_t^{1)}$	$J_s^{2)}$	$J_{ge}^{3)}$
<b>Max. permissible speed</b>	(m/s)	—	$v_{max}^{3)}$	—
<b>Max. permissible rotary speed</b>	(rpm)	—	$n_p^{1)}$	$n_{ge}^{3)}$
<b>Max. permissible drive torque</b>	(Nm)	—	$M_p^{3)}$	$M_{ge}^{3)}$

<sup>1)</sup> Determine the value using the appropriate formula

<sup>2)</sup> Length-dependent value, determined using the appropriate formula

<sup>3)</sup> Use the value from the table

<sup>4)</sup> Any additional process forces are to be taken into consideration as load moments

<sup>5)</sup> For vertical mounting position: Determine the value using the appropriate formula

**Drive dimensioning with motor shaft as reference point**

When dimensioning the drive, all relevant design calculation values for the mechanical components in the drive train have to be determined and be expressed/reduced to the motor shaft. For a combination of mechanical components within the drive train, this will result in one value for each of the following:

- ▶ Frictional torque  $M_R$
- ▶ Mass moment of inertia  $J_{ex}$
- ▶ Maximum permissible speed  $v_{mech}$  (maximum permissible rotary speed  $n_{mech}$ )
- ▶ Max. permissible drive torque  $M_{mech}$

**Determination of the values for the mechanical system in the drive train, based on the motor shaft as reference point**

**Frictional torque  $M_R$ :**

For direct motor attachment  
(without gear)

$$M_R = M_{RS}$$

For motor attachment via gear

$$M_R = M_{Rge} + \frac{M_{RS}}{i}$$

**Mass moment of inertia  $J_{ex}$**

For direct motor attachment  
(without gear)

$$J_{ex} = J_s + J_t$$

For motor attachment via gear

$$J_{ex} = J_{ge} + \frac{(J_s + J_t)}{i^2}$$

Determination of mass moment of inertia  
of Linear Motion System components

$$J_s = (k_{J_{fix}} + k_{J_{var}} \cdot L) \cdot 10^{-6}$$

Determination of translatory mass  
moment of inertia of external load

$$J_t = m_{ex} \cdot k_{J_m} \cdot 10^{-6}$$

**Maximum permissible speed  $v_{\text{mech}}$  (max. permissible rotary speed  $n_{\text{mech}}$ )**

The lowest of all the values for maximum permissible speed or rpm of all mechanical components contained in the drive train determines the maximum permissible speed of the mechanical system which has to be taken into consideration as the upper limit for the drive when sizing the motor.

**Maximum permissible speed**

For direct motor attachment  
(without gear)

$$v_{\text{mech}} = v_{\text{max}}$$

$$v_{\text{mech}} = \frac{n_{\text{mech}} \cdot p \cdot d_3}{1,000 \cdot 60}$$

For motor attachment  
via gear

$$v_{\text{mech}} = \frac{n_{\text{mech}} \cdot p \cdot d_3}{i \cdot 1000 \cdot 60}$$

**Maximum permissible rotary speed**

For direct motor attachment  
(without gear)

$$n_{\text{mech}} = \frac{v_{\text{mech}} \cdot i \cdot 1,000 \cdot 60}{p \cdot d_3}$$

$$n_{\text{mech}} = n_p$$

For motor attachment via gear

$$n_{\text{mech}} = \text{minimum} (n_p \cdot i ; n_{ge})$$

$$n_p = \frac{v_{\text{max}} \cdot 1,000 \cdot 60}{p \cdot d_3}$$

**Maximum permissible drive torque  $M_{\text{mech}}$**

The lowest (minimum) of all the values for permissible drive torque of all mechanical components contained in the drive train determines the maximum permissible drive torque of the mechanical system which has to be taken into consideration as the upper limit for the drive when sizing the motor.

For direct motor attachment  
(without gear)

$$M_{\text{mech}} = M_p$$

For motor attachment via gear

$$M_{\text{mech}} = \text{Minimum} \left( \frac{M_{ge}}{i} ; \frac{M_p}{i} \right)$$

**⚠ When considering the complete drive train (mechanical system + motor/controller) the maximum torque of the motor can lie below the maximum value for the mechanical system ( $M_{\text{mech}}$ ) and thus limit the maximum permissible drive torque of the overall drive train.**

**If the maximum torque of the motor lies above the upper limit for the mechanical system ( $M_{\text{mech}}$ ), the maximum motor torque must be limited to the permitted value for the mechanical system.**

**General motor preselection**

The motor can be generally preselected using the following conditions:

**Condition 1:**

The rotary speed of the motor must be greater than or equal to the rotary speed required for the mechanical system (but not exceeding the maximum permissible limit value).

$$n_{\max} \geq n_{\text{mech}}$$

**Condition 2:**

Consideration of the ratio of mass moments of inertia of the mechanical system and the motor. The ratio of the mass moments of inertia serves as an indicator for the control performance of a motor/controller combination. The mass moment of inertia of the motor is directly related to the motor size.

Ratio of mass moments of inertia

$$V = \frac{J_{\text{ex}}}{J_m + J_{\text{br}}}$$

For preselection, experience has shown that the following ratios will result in high control performance. These are not rigid limits, but values exceeding them will require closer consideration of the specific application.

Application area	V
Handling	≤ 6.0
Processing	≤ 1.5

**Condition 3:**

Estimation of the ratio of the static load moment to the continuous torque of the motor. The torque ratio must be less than or equal to an empirical value of 0.6. This condition roughly factors in the missing dynamic characteristics of an exact motion profile with the required motor torques.

Torque ratio

$$\frac{M_{\text{stat}}}{M_0} \leq 0.6$$

Static load moment

$$M_{\text{stat}} = M_R + M_g$$

Weight moment

**For vertical mounting only!**

$$M_g = \frac{d_3 \cdot (m_{\text{ex}} + m_{\text{ca}}) \cdot g}{2,000 \cdot i}$$





In the section titled "► Configuration and ordering", users can put together standard configurations, including gears and motor, for the various Linear Motion System sizes by selecting the appropriate options. By checking the above conditions, it is possible to see whether a standard motor selected in a particular configuration will generally be of a suitable size for the specific application.

**Precise drive dimensioning**

Preselecting the motor according to this rough guide is no substitute for the required precise design calculations for the drive, taking all moments/torques and rotary speed levels into account. For precise calculation of the electric drive, including consideration of the specific motion profile, please refer to the performance data in the catalog "Rexroth drive technology". When dimensioning the drive, the maximum permitted values for linear speed, drive torque and acceleration must not be exceeded, in order to avoid damaging the mechanical system.

Configuration and ordering

**FMB-080-SN-1**

$s_{max.}^{1)}$ (mm)	Carriage	Guideway	Version	Drive	Gear	Mechanical interface	
	$L_{ca} = 160 \text{ mm}$						
$s_{max} =$	002	001	H001 	001	-	00	
			G010 	011	3	011	
					5	012	
					10	013	
					3	021	
					5	022	
					10	023	

<sup>1)</sup> Travel distance  $s_{max}$  depends on length L and option selection → Section "General technical instructions".


<sup>2)</sup> Coverage up to a length L = 1,500 m available.

Motor			Motor connector position	Cover <sup>2)</sup>		Documentation
Motor code	without Brake	with		without Cover plate	with	Standard report
-	000					
<b>MSM031C-0300</b>	138	139	000 090 180 270	000	010	001
<b>ECMA-C20604</b>	182	183				
<b>ECMA-C10604</b>	192	193				
<b>MSM041B-0300</b>	140	141				
<b>ECMA-C20807</b>	184	185				
<b>ECMA-C10807</b>	194	195				





Length calculation ➡ Section “General technical instructions”

Version	Motor connector position			
	0°	90°	180°	270°
G010/G011	000	090 ★	180	270

★ standard delivery (connector orientation)



**FMB-110-DN-1**

$s_{max.}^{1)}$ (mm)	Carriage	Guideway	Version	Drive	Gear	Mechanical interface	
	$L_{ca} = 160 \text{ mm}$						
			H001 	001	-	00	
$s_{max}^{2)}$	002	001	G010 	011	3	011	
					5	012	
					10	013	
					3	021	
					5	022	
					10	023	

<sup>1)</sup> Travel distance  $s_{max}$  depends on length L and option selection → Section “General technical instructions”.


<sup>2)</sup> Coverage up to a length L = 1,500 m available.

Motor			Motor connector position	Cover <sup>2)</sup>		Documentation
Motor code	without Brake	with		without Cover plate	with	Standard report
-	000					
<b>MSM031C-0300</b>	138	139	000 090 180 270	000	010	001
<b>ECMA-C20604</b>	182	183				
<b>ECMA-C10604</b>	192	193				
<b>MSM041B-0300</b>	140	141				
<b>ECMA-C20807</b>	184	185				
<b>ECMA-C10807</b>	194	195				

Length calculation ➡ Section “General technical instructions”



Version	Motor connector position			
	0°	90°	180°	270°
G010/G011	000	090 ★	180	270

★ standard delivery (connector orientation)



Frame dimension drawings



**FMB-xxx-SN-1 (single-rail)**

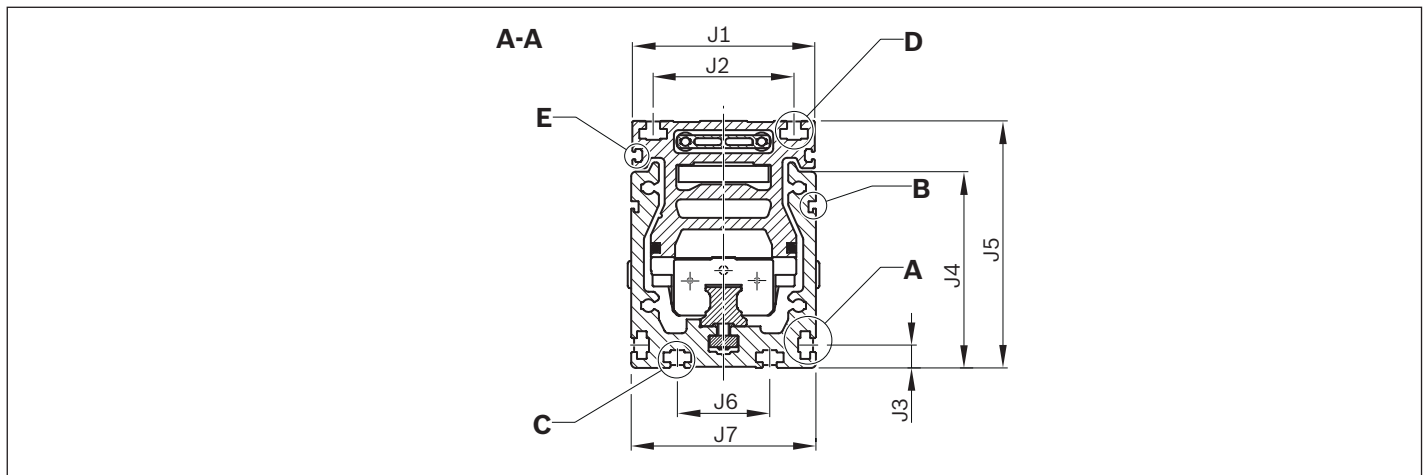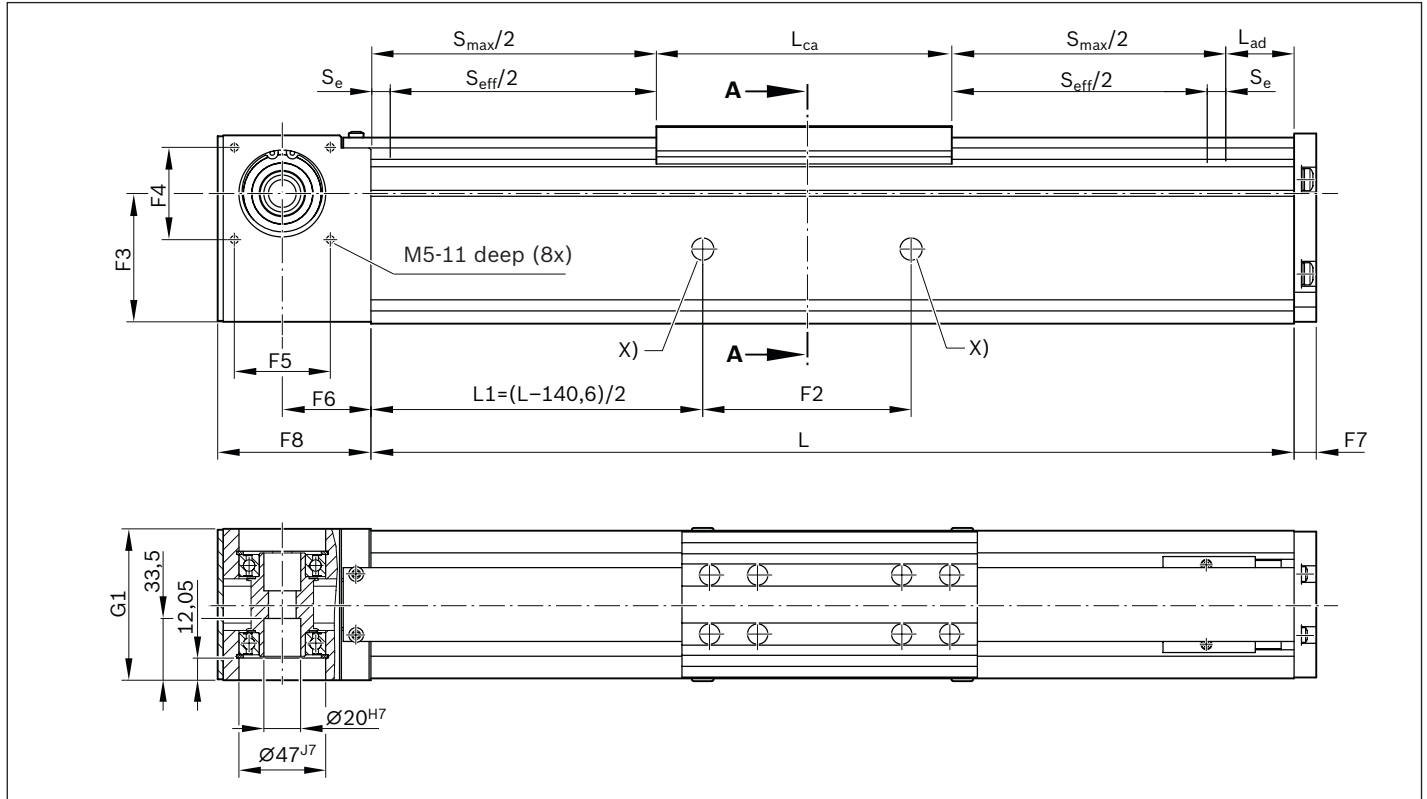

FMB	Dimensions (mm)																	
	F1	F2	F3	F4	F5	F6	F7	F8	G1	J1	J2	J3	J4	J5	J6	J7	$L_{ca}$	$L_{ad}$
-080-SN-1	160	140.6	69.5	50	52	48	12	83	82	79	61	9.9	85	107	40	80	160	71

X: Lube fittings (DIN 3405-A funnel-type lube nipple) on both sides for Runner Block grease lubrication. For further information, see the section titled "Lubrication".

**FMB-xxx-DN-1 (dual-rail)**

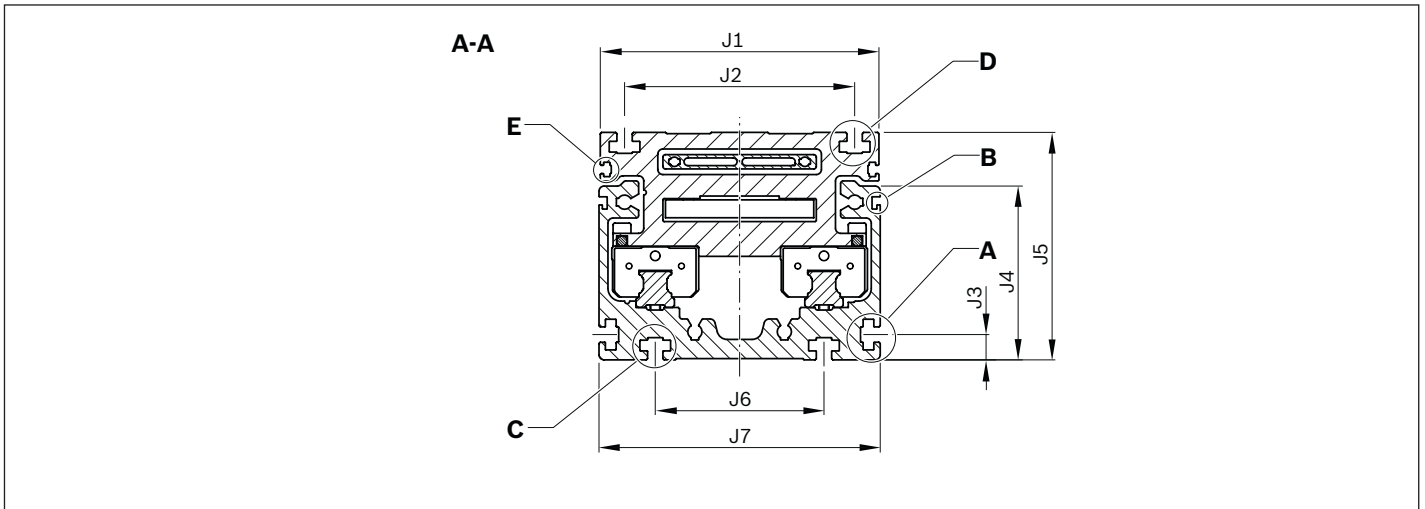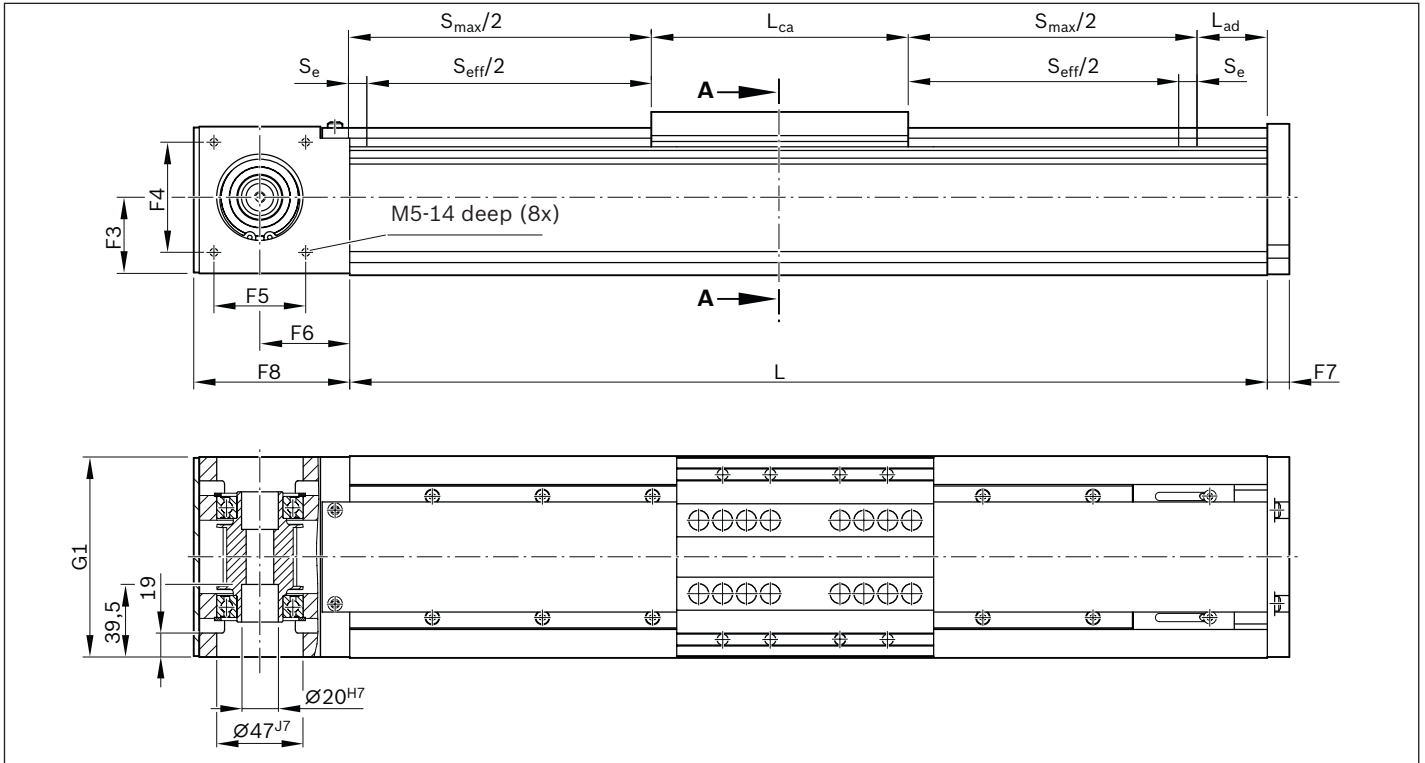


FMB	Dimensions (mm)																	
	F1	F2	F3	F4	F5	F6	F7	F8	G1	J1	J2	J3	J4	J5	J6	J7	$L_{ca}$	$L_{ad}$
<b>-110-DN-1</b>	140	-	41.5	60	50	49	12	85	109	109	90	9.9	68	89	66	110	140	73

Notes: Diagrams use different scales. Exact contours and dimensions can be found in the CAD model.

CAD configurator available on the Internet at [www.boschrexroth.com](http://www.boschrexroth.com) "Product configurators".

See below for dimension drawings for motor attachment and details. For short product names, see the section titled "Additional information". For lubrication, see the section titled "Lubrication".


Dimensional drawings of details

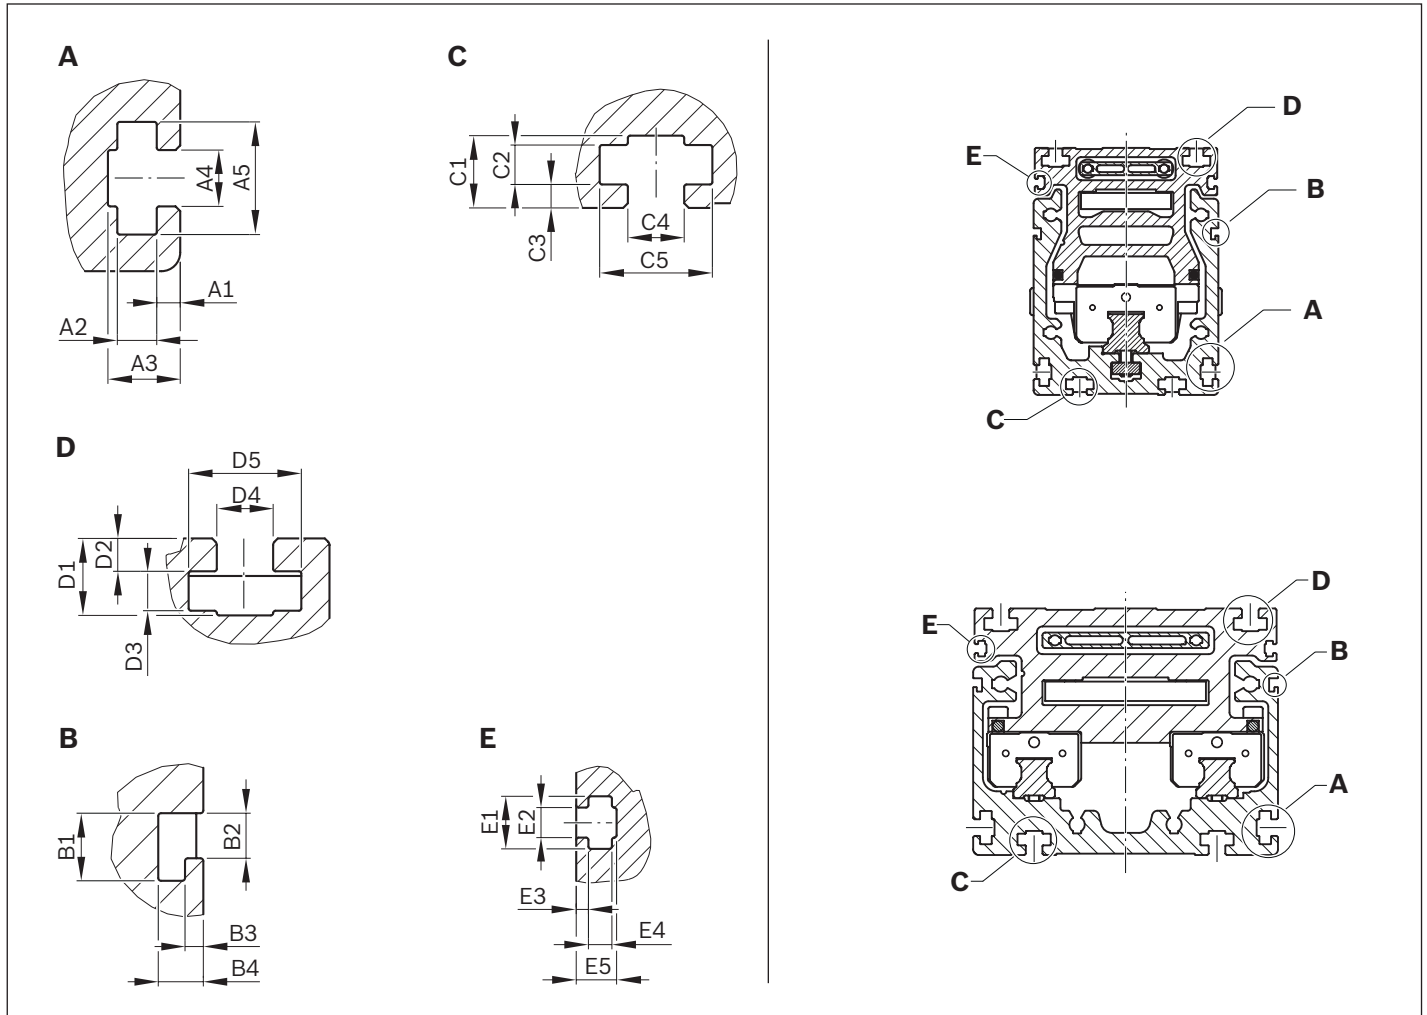

FMB	Dimensions (mm)																								
	A1	A2	A3	A4	A5	B1	B2	B3	B4	C1	C2	C3	C4	C5	D1	D2	D3	D4	D5	E1	E2	E3	E4	E5	
-080-SN-1	2.5	4.2	7.7	6	12	4.8	3.2	1.3	3.2	7.7	4.2	2.5	6	12	8.2	3.5	4.2	6	12	5.6	3.2	1.3	2.5	4.3	
-110-DN-1	2.5	4.2	7.7	6	12	4.8	3.2	1.3	3.2	8.7	4.2	3.5	6	12	8.2	3.5	4.2	6	12	5.6	3.2	1.3	2.5	4.3	

- A** For fastening with clamping fixtures.
- B** For sensor plate (for magnetic/optical sensors).
- C** For fastening with sliding blocks
- D** For customer's attachment
- E** For switching cam (for optical sensor).

Motor attachment dimension drawings

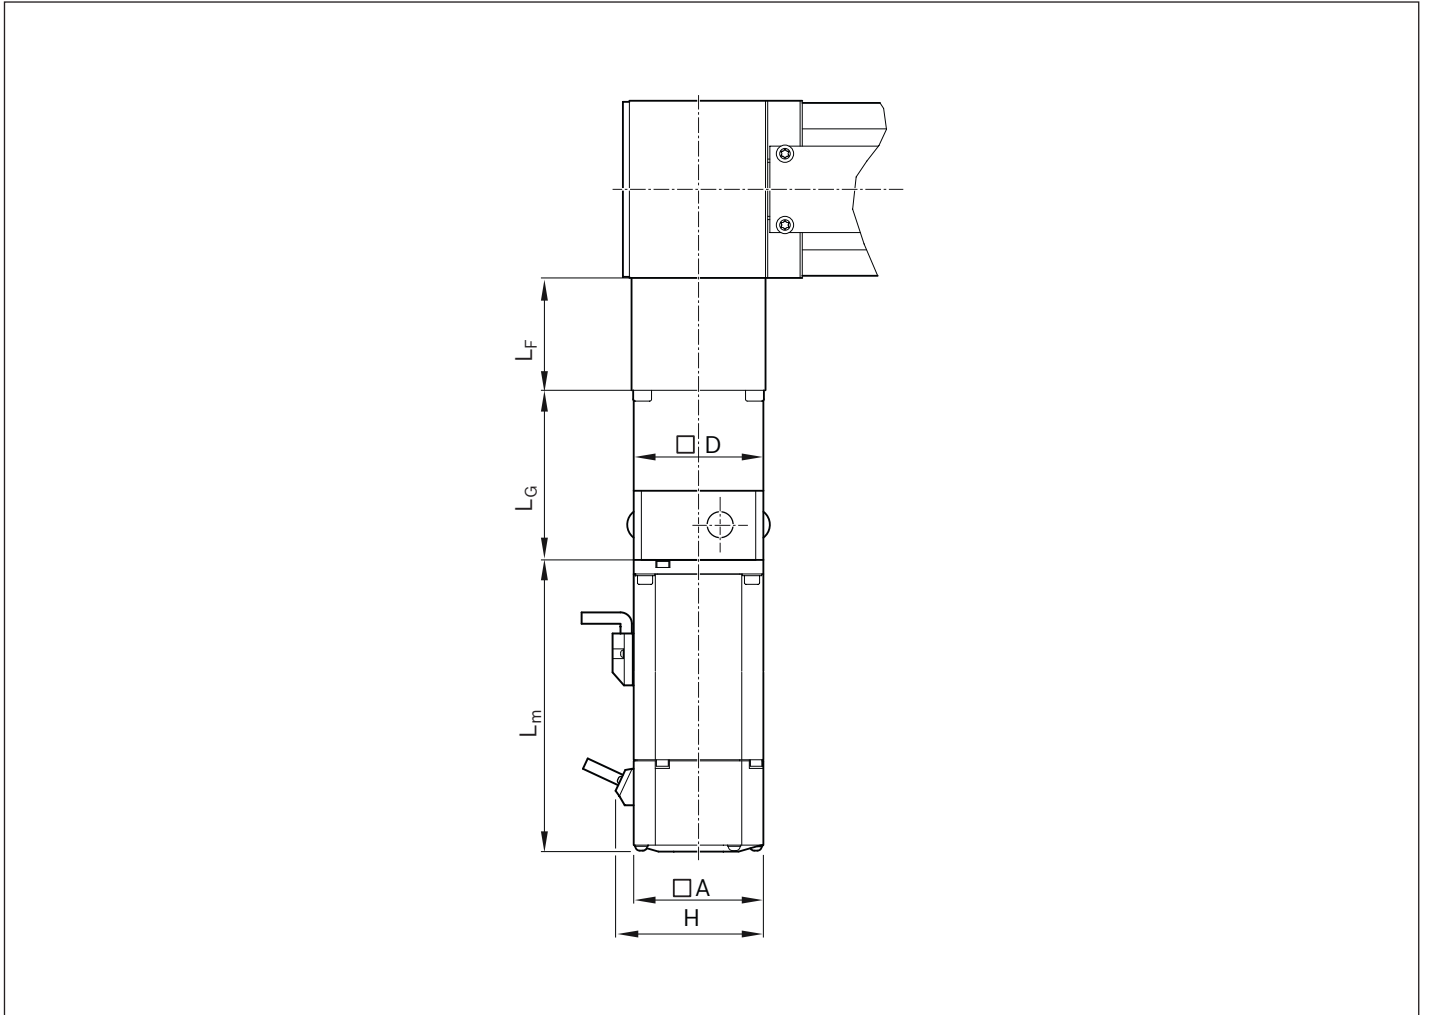

FMB	i	Motor	Dimensions (mm)		$L_G$	$L_F$	A / D	H
			Without brake	With brake				
<b>-080-SN-1</b>	3/5/10	MSM 031C	98.5	135.0	78.5	52	60	73
		ECMA-C20604 ECMA-C10604	130.7	166.8				
		MSM041B	112.0	149.0	104	60.5	80	93
		ECMA-C20807 ECMA-C10807	138.3	178.0				
<b>-110-DN-1</b>	3/5/10	MSM 031C	98.5	135.0	78.5	46	60	73
		ECMA-C20604 ECMA-C10604	130.7	166.8				
		MSM041B	112.0	149.0	104	54.5	80	93
		ECMA-C20807 ECMA-C10807	138.3	178.0				


# Mounting

## General information

The Function Modules are mounted using various fastening elements:

- ▶ Sliding blocks
- ▶ Square nuts
- ▶ Spring nuts
- ▶ Screws for T-slots as per DIN 787 (no picture).  
Length depends on base.


Size	Dimensions (mm)		
	A	B	C
-080	96	110	40
-110	126	140	66

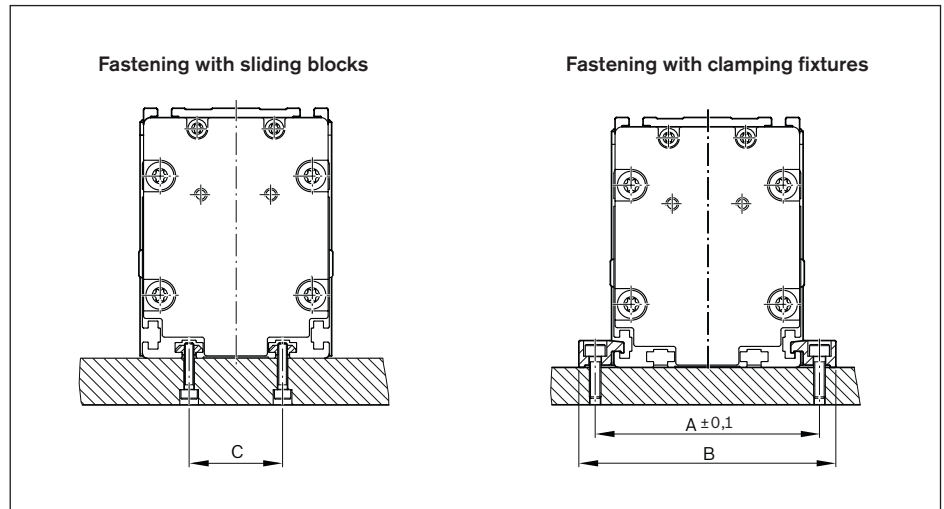

**Clamping fixtures**

Recommended number of clamping fixtures:

- ▶ Type 1: 6 per meter and side
- ▶ Type 2: 4 per meter and side
- ▶ Type 3: 3 per meter and side
- ▶ Type 4: 3 per meter and side

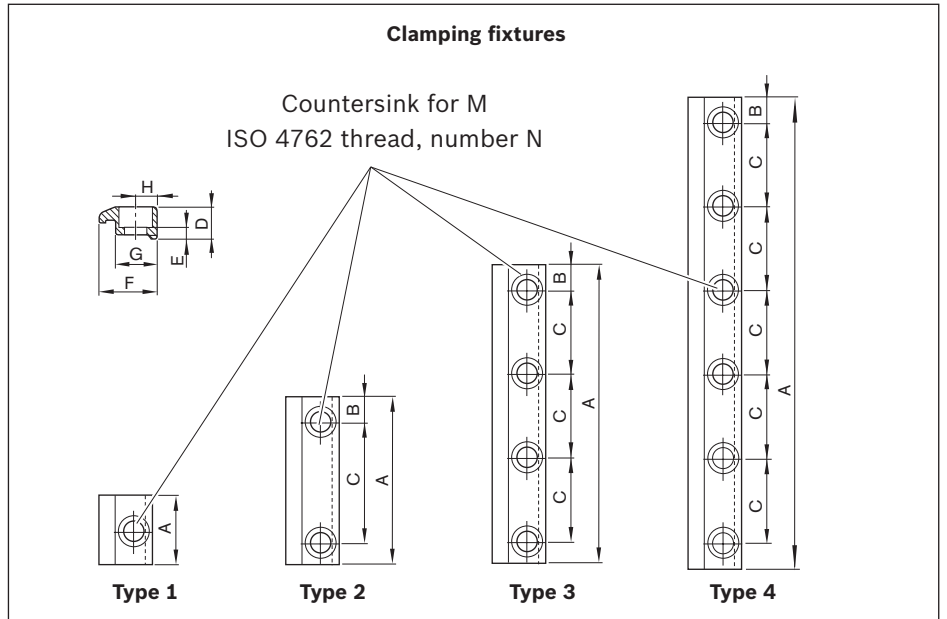


Size	For thread	Type	Number of holes N	Dimensions (mm)								Part number
				A	B	C	D	E	F	G	H	
-080/-110	M5	3	4	107	8.5	30	11.5	4.8	19.3	14.0	7.0	R037541002
		3	4	77	8.5	20						R037541026
		4	6	107	8.5	18						R037541041
	M6	1	1	25	-	-	11.5	5.3	19.3	14.0	7.0	R037551000
		3	4	142	11.0	40						R037551002
		2	2	72	11.0	50						R037551033
		2	2	62	11.0	40						R037551034
		2	2	47	8.5	30						R037551023
		4	6	142	8.5	25						R037551041

**Sliding blocks, springs and strips**

Recommended number at the sliding blocks: with one thread, six pieces per meter and side


For fastening attachments on the connection plate.  
The spring serves as a mounting and positioning aid.

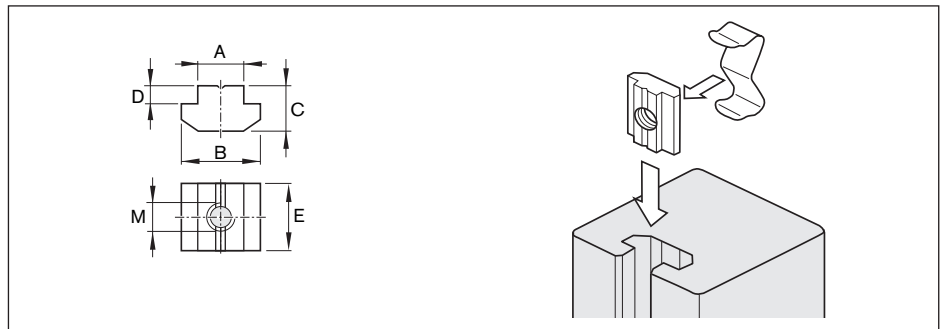

Size	For thread	Dimensions (mm)					Sliding block part number	Spring part number
		A	B	C	D	E		
-080/-110	M4	6	11.5	4	1	12	R344701401	R341201002

# Motor/controller

IndraDyn S MSM servo motors

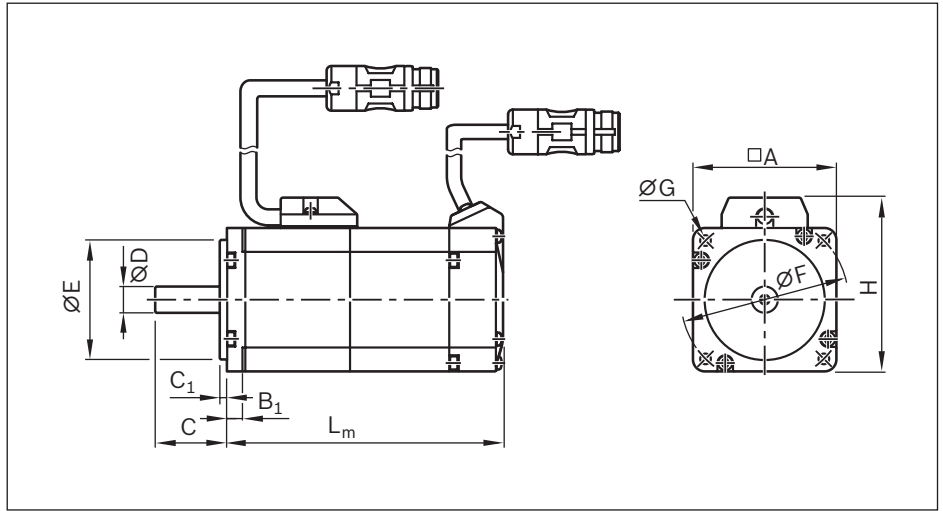

Motor schematic

Motor code	Dimensions (mm)										L <sub>m</sub>	
	A	B <sub>1</sub>	C	C <sub>1</sub>	ØD h6	ØE h7	ØF	ØG	H	Without holding brake	With holding brake	
MSM031C-0300	60	6.5	30	3	14	50	70	4.5	73	98.5	135.0	
MSM041B-0300	80	8.0	35	3	19	70	90	6.0	93	112.0	149.0	

## Motor data


Motor code	n <sub>max</sub> (rpm)	M <sub>0</sub> (Nm)	M <sub>max</sub> (Nm)	M <sub>br</sub> (Nm)	J <sub>m</sub> (kgm <sup>2</sup> )	J <sub>br</sub> (kgm <sup>2</sup> )	m <sub>m</sub> (kg)	m <sub>br</sub> (kg)
MSM031C-0300	5,000	1.30	3.80	1.27	0.0000260	0.0000018	1.20	0.50
MSM041B-0300	4 500	2.40	7.10	2.45	0.0000870	0.0000075	2.30	0.80

Motor code	Motor connection 1/2 cable(s)	Holding brake	Type code	Part number
MSM031C-0300-NN	2	Without	MSM031C-0300-NN-M5-MH0	R911344215
		With	MSM031C-0300-NN-M5-MH1	R911344216
MSM041B-0300-NN	2	Without	MSM041B-0300-NN-M5-MH0	R911344217
		With	MSM041B-0300-NN-M5-MH1	R911344218

**Versions:**

- ▶ Plain shaft without shaft seal
- ▶ M5 multiturn absolute encoder (20-bit, absolute encoder function only available with backup battery)
- ▶ Cooling system: natural convection
- ▶ IP rating: IP54 (shaft: IP40)
- ▶ With or without holding brake
- ▶ M17 metal round connector

**Torque/speed characteristic**  
(Schematic)

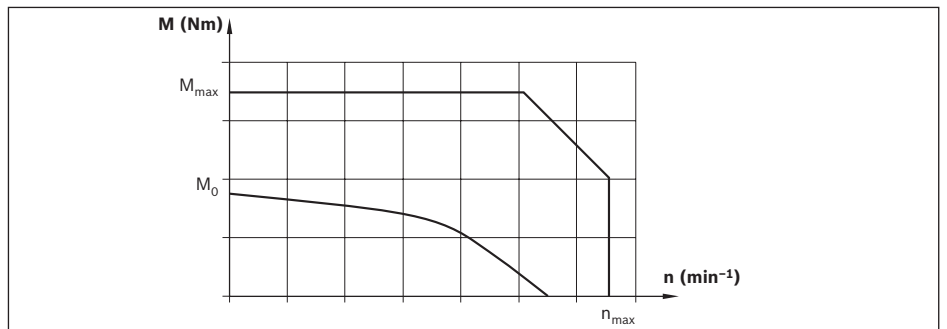

**Note**

Motors are available with control units and controllers. See the Rexroth Drive Technology catalog for other motor types and more information on motors, control units and controllers at [www.boschrexroth.com/mediadirectory](http://www.boschrexroth.com/mediadirectory).

**Rexroth Media Directory**

**Categories**

- ▶ Electric Drives and Controls
  - ▶ General
  - ▶ Documentationlist
  - ▶ Drive Technology
  - ▶ Automation Systems
  - ▶ Press-fit systems
  - ▶ Engineering
  - ▶ Control units
  - ▶ Resistance Welding
- ▶ Industrial Hydraulics
- ▶ Mobile Hydraulics
- ▶ Linear Motion Technology
- ▶ Assembly Technology
- ▶ Collaborative robotics
- ▶ Tightening Systems
- ▶ Systems
- ▶ Training
- ▶ Company
- ▶ Industries
- ▶ Cast

- ▶ IndraDrive
- ▶ IndraDrive Cs
- ▶ IndraDrive Mi
- ▶ IndraDrive ML
- ▶ Frequency Converter EFC 3610/5610
- ▶ Frequency Converter VFC 3610/5610
- ▶ Frequency Converter VFC 3210
- ▶ Frequency Converter Fe
- ▶ Frequency Converter Fv
- ▶ Motors

▶ Show category contents



▶ Search

▶ Advanced Search

**Functions**

▶ Start page

ECMA servo motors

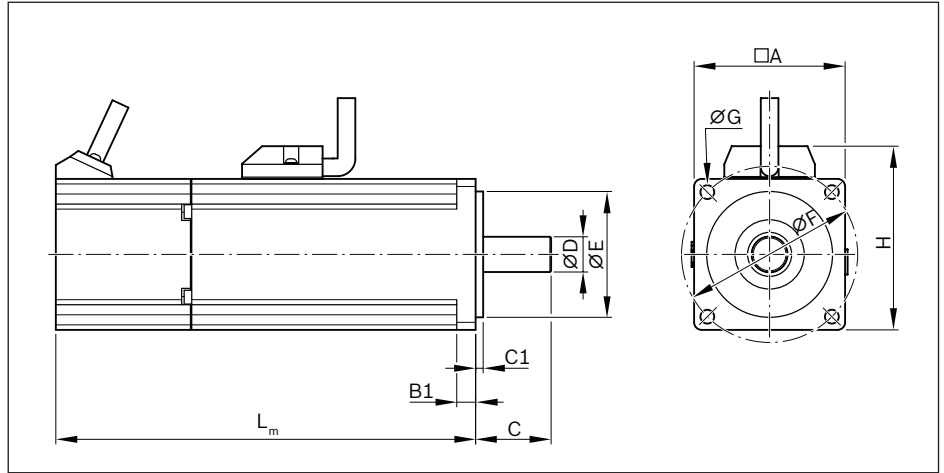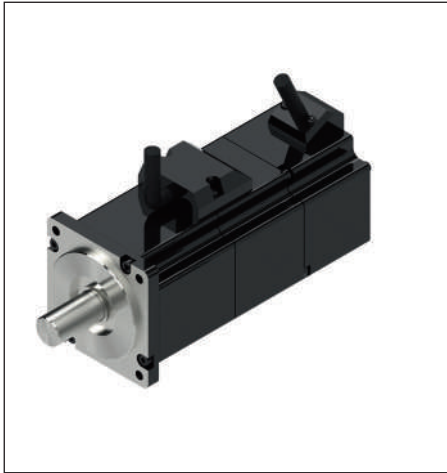


Motor schematic

Motor code	Dimensions (mm)										Without holding brake	L <sub>m</sub> With holding brake
	A	B <sub>1</sub>	C	C <sub>1</sub>	ØD h6	ØE h7	ØF	ØG	H			
ECMA-C20604 ECMA-C10604	60	7.5	30	3	14	50	70	5.5	72.9		130.7	166.8
ECMA-C20807 ECMA-C10807	90	8.0	35	3	19	70	90	6.6	92.8		138.3	178.0

Motor data

Motor code	n <sub>max</sub> (rpm)	M <sub>0</sub> (Nm)	M <sub>max</sub> (Nm)	M <sub>br</sub> (Nm)	J <sub>m</sub> (kgm <sup>2</sup> )	J <sub>br</sub> (kgm <sup>2</sup> )	m <sub>m</sub> (kg)	m <sub>br</sub> (kg)
ECMA-C20604 ECMA-C10604	5,000	1.27	3.82	1.3	0.0000277	0.0000023	1.6	0.4
ECMA-C20807 ECMA-C10807	5000	2.39	7.16	2.5	0.000113	0.000005	3.0	0.8

Connector variants

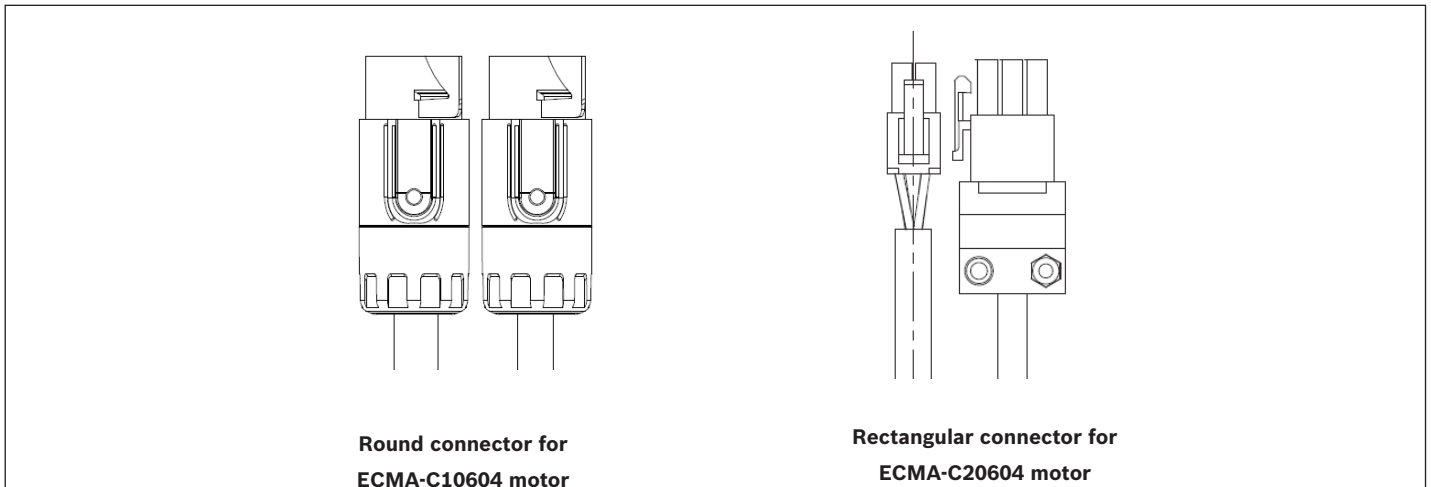

Round connector for  
ECMA-C10604 motor

Rectangular connector for  
ECMA-C20604 motor

Motor code	Motor connection 1/2 cable(s)	Holding brake	Type code	Part number
ECMA-C20604 <sup>1)</sup>	2	Without	ECMA-C20604CS	R913062732
		With	ECMA-C20604DS	R913062733
ECMA-C10604 <sup>2)</sup>	2	Without	ECMA-C10604YG	R913063450
		With	ECMA-C10604YK	R913063452
ECMA-C20807 <sup>1)</sup>	2	ohne	ECMA-C20807CS	R913062734
		mit	ECMA-C20807DS	R913062735
ECMA-C10807 <sup>2)</sup>	2	ohne	ECMA-C1087YG	R913063454
		mit	ECMA-C1087YK	R913063455


<sup>1)</sup> With rectangular connector

<sup>2)</sup> With IP67 round connector

**Version**

- ▶ Plain shaft
- ▶ With or without holding brake

**Torque/speed characteristic**  
 (Schematic)

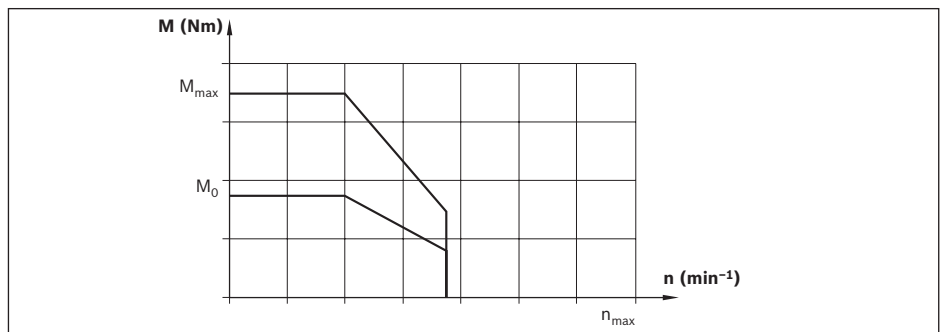

**Note**

Motors are available with control units and controllers. More information below.

ASD-B2 drive controller

**With step motor interface for ECMA servo motors**



Part no.	Designation	Type	Characteristic(s)
<b>Drive controller</b>			
R913063556	Servo controller with step motor interface	ASD-B2-0421-B	400 W 200–230 V 1-phase/3-phase
R913063557	Servo controller with step motor interface	ASD-B2-0721-B	750 W 200–230 V 1-phase/3-phase


<b>Motor brake and encoder cables with rectangular connectors for ECMA-C2 motor</b>			
R901490363	Motor brake cable	ASDBCAPW0305	Length 5 m
R901490374	Encoder cable	ASDBCAEN0005	Length 5 m

<b>Accessories</b>			
R911388169	CN1 connector with terminals	ASD-IF-DS4444	
R911388170	CN3 parameterization cable (for PC)	ASD-CNUS0A08	Length 3 m
R911266399	Mains filter	NFE02.1-230-008	8 A

Motor code	Motor connection 2 cables	Holding brake	Type code	Part number
ECMA-C20604	2	Without	ECMA-C20604CS	R913062732
		With	ECMA-C20604DS	R913062733

**Note**

Further information on control units, controllers and start-up software can be found in the Rexroth Media Directory at [www.boschrexroth.com/mediadirectory](http://www.boschrexroth.com/mediadirectory).

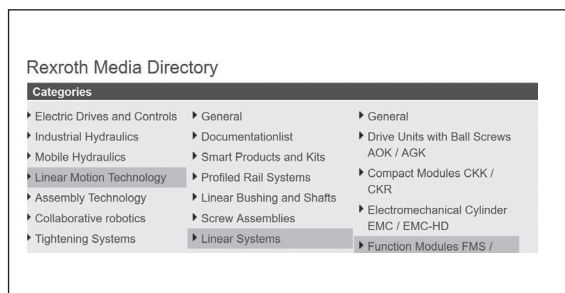

## ASD-A2 drive controller

**With EtherCAT and CANopen interface for ECMA servo motors**


Part no.	Designation	Type	Characteristic(s)
----------	-------------	------	-------------------

**Drive controller**

R913063564	Servo controller with CANopen interface	ASD-A2-0421-M	400 W 200–230 V 1-phase/3-phase
R913063560	Servo controller with EtherCAT interface	ASD-A2-0421-E	
R913063566	Servo controller with CANopen interface	ASD-A2-0721-M	750 W 200–230 V 1-phase/3-phase
R913063561	Servo controller with EtherCAT interface	ASD-A2-0721-E	

**Motor brake and encoder cables with rectangular connectors for ECMA-C2 motor**

R901490568	Motor brake cable	ASD-ABPW0105	Length 5 m
R901490557	Encoder cable	ASD-ABEN0005	Length 5 m

**Motor brake and encoder cables with (IP67 round connectors for ECMA-C1 motor**

R901490883	Motor cable with brake piloting	A2B-I67-.75-5	Length 5 m
R901490894		A2B-I67-.75-10	Length 10 m
R901490895		A2B-I67-.75-20	Length 20 m
R901490920	Encoder cable	A2I-03-05-A2-5	Length 5 m
R901490923		A2I-03-05-A2-10	Length 10 m
R901490925		A2I-03-05-A2-20	Length 20 m

**Accessories**

R911388171	CN1 connector with terminals	ASD-IF-SC5020	
R901490926	CN4 parameterization cable (for PC)	UC-PRG015-02A	Length 1.5 m
R911266399	Mains filter	NFE02.1-230-008	8 A

Motor code	Motor connection 2 cables	Holding brake	Type code	Part number
ECMA-C20604 <sup>1)</sup>	2	Without	ECMA-C20604CS	R913062732
		With	ECMA-C20604DS	R913062733
ECMA-C10604 <sup>2)</sup>	2	Without	ECMA-C10604YG	R913063450
		With	ECMA-C10604YK	R913063452
ECMA-C20807 <sup>1)</sup>	2	Without	ECMA-C20807CS	R913062734
		With	ECMA-C20807DS	R913062735
ECMA-C10807 <sup>2)</sup>	2	Without	ECMA-C10807YG	R913063454
		With	ECMA-C10807YK	R913063455


<sup>1)</sup> With rectangular connector

<sup>2)</sup> With IP67 round connector

# Switching system


## Overview of switching system

### Magnetic sensor

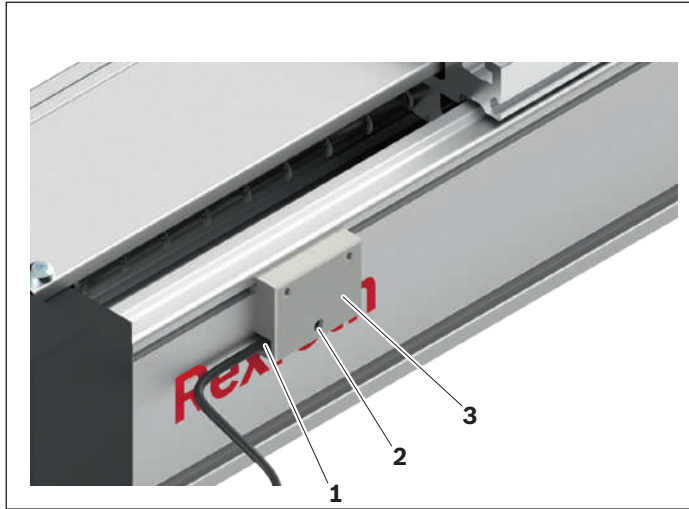

- 1 Magnetic sensor
- 2 Clamping screw
- 3 Sensor plate

### Optical sensor

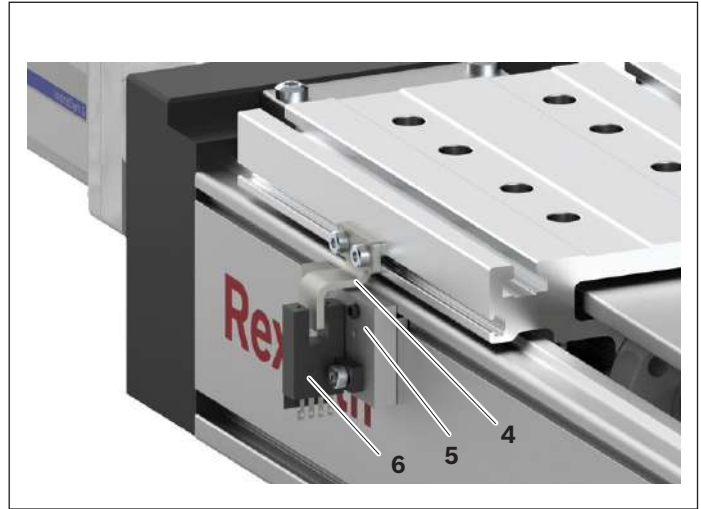

- 4 Switching cam
- 5 Sensor plate
- 6 Optical sensor

### Ordering sensors and attachments

Assembly	Use	Designation
<b>Magnetic sensor</b>		
R114134020	Limit switch (PNP/NC)	MZT8-03VPO-KRDS14
R114134021	Reference switch (PNP/NO)	MZT8-03VPS-KRDS13
R114134022	Limit switch (NPN/NC)	MZT8-03VNO-KRDS16
R114134023	Reference switch (NPN/NO)	MZT8-03VNS-KRDS15
<b>Optical sensor</b>		
R116134020	Limit- Reference switch (PNP)	EE-SX672P
R116134021	Limit- Reference switch (NPN)	EE-SX672

### Sensor mounting

#### Magnetic sensor

The switch activator is a magnet integrated in the carriage (no switching cam necessary). The switch activation points can be positioned anywhere along the stroke. Versions: Hall sensor

#### Optical sensor

The switch activator is a switching cam. The switch activation points can be positioned anywhere along the stroke.


#### General mounting instructions:

Sensors may only be mounted on one side (left or right) of the Function Module and should not be installed until the Function Module has been fastened to its base. For instructions on mounting and setting the switch activation points, see the Function Module manual.


See the section titled “Attachments and accessories” for technical data.

Sensor mounting

**Magnetic sensor**

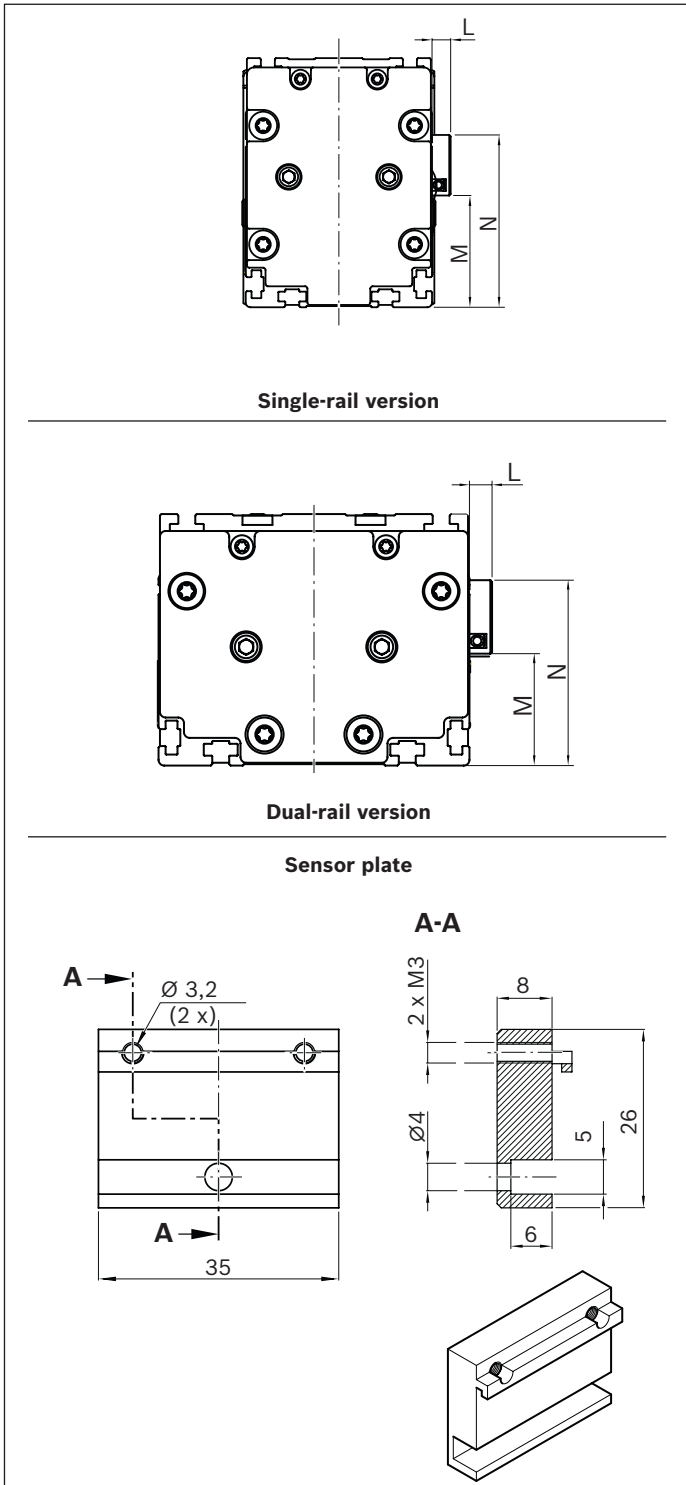

**Optical sensor**

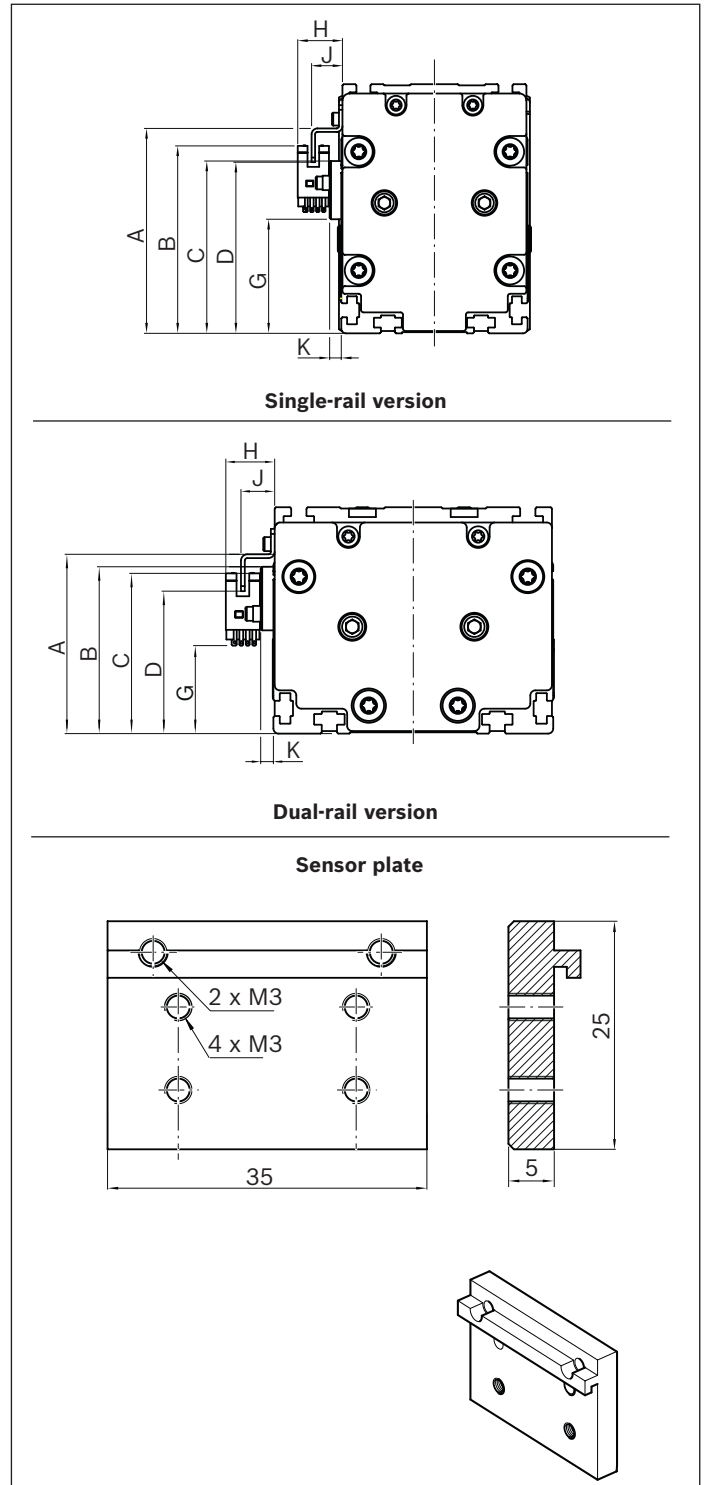

FMx	Dimensions (mm)												
	A	B	C	D	E	F	G	H	J	K	L	M	N
<b>-080-SN-1</b>	88.0	80.5	74	73.5	54.5	52.1	49.0	19.2	13.25	5	8	48.0	74.0
<b>-110-DN-1</b>	70.5	65.6	63	56.0	40.6	37.0	34.6	19.2	13.25	5	8	39.6	65.6


# Attachments and accessories

## Coupling for Function Modules FMB

Couplings connect individual components such as motors, gears and linear axes, and transmit a rotary motion or torque.

### Version

- ▶ Vibration-reducing claw coupling
- ▶ Axially intermatable
- ▶ Maintenance-free

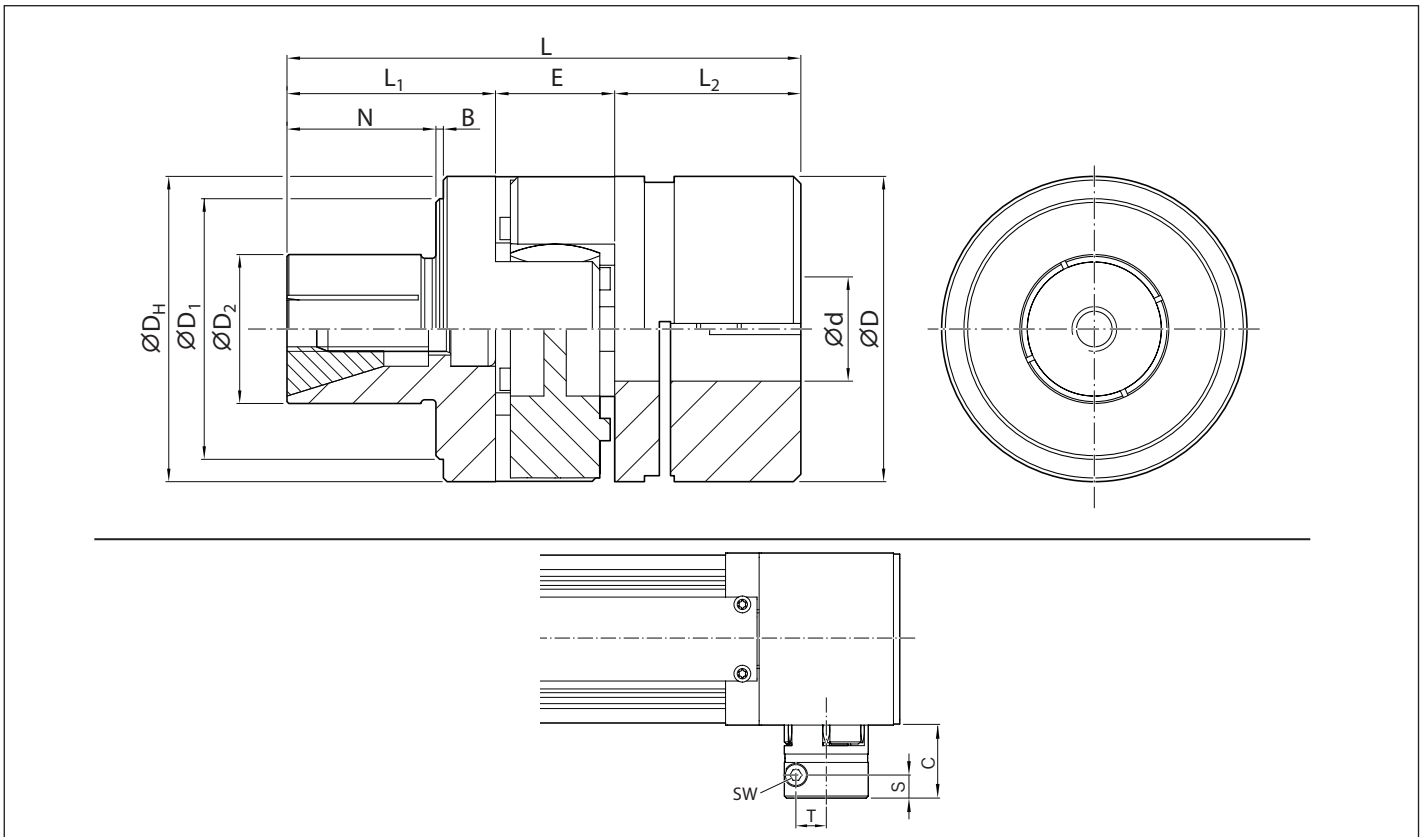

FMB	Part number (Coupling)	Dimensions (mm)													
		ØD	ØD <sub>H</sub>	ØD <sub>1</sub>	ØD <sub>2</sub>	Ød	B	C	E	L	L <sub>1</sub>	L <sub>2</sub>	N	S	T
-080-SN-1 -110-DN-1	R345400219	41	41	35	20	14	1	35 29	16	69	28	25	20	9	14.5
	R913067250	41	41	35	20	20	1	35 29	16	69	28	25	20	9	14.5

Adapter shaft for Funktions  
Modules FMB


The adapter shaft connect Funktions  
Module with connecting shafts, and  
transmit a rotary motion or torque.

**Version**

- ▶ Axially intermatable
- ▶ Maintenance-free

**Part number**

R345400220

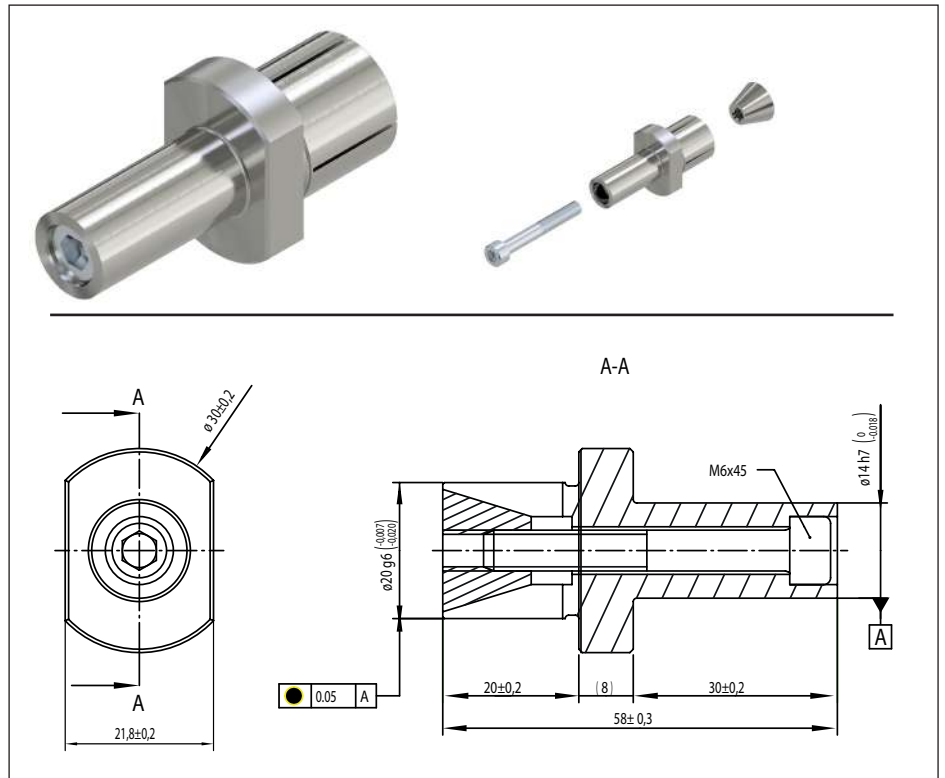

Nozzle pipe

For manual grease guns.

For the lubrication of funnel-type and  
ball-type lube nipples.

Scope of delivery:


nozzle pipe, interchangeable insert A  
for funnel-type lube nipple, interchan-  
geable insert B for ball-type lube  
nipple.

**Part number**

R345503106

**Weight (g)**

158

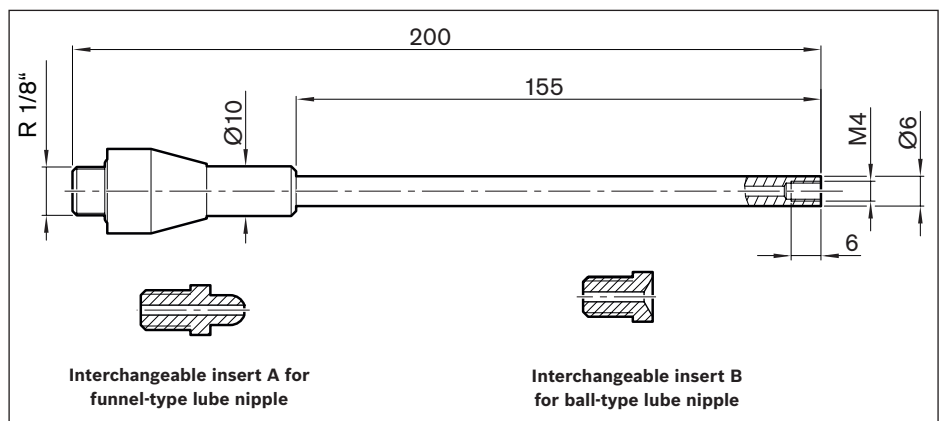

Frequency meter

For checking the toothed belt pre-tension  
on linear axes with toothed belt  
drive as well as the setting of the toothed  
belt pre-tensioning when driven by  
a belt pulley.

Scope of delivery:

Frequency meter TECO-S MINI, Plug-in  
measuring head, extension cable,  
leather belt bag.




**Part number**


R913057897

Sensors

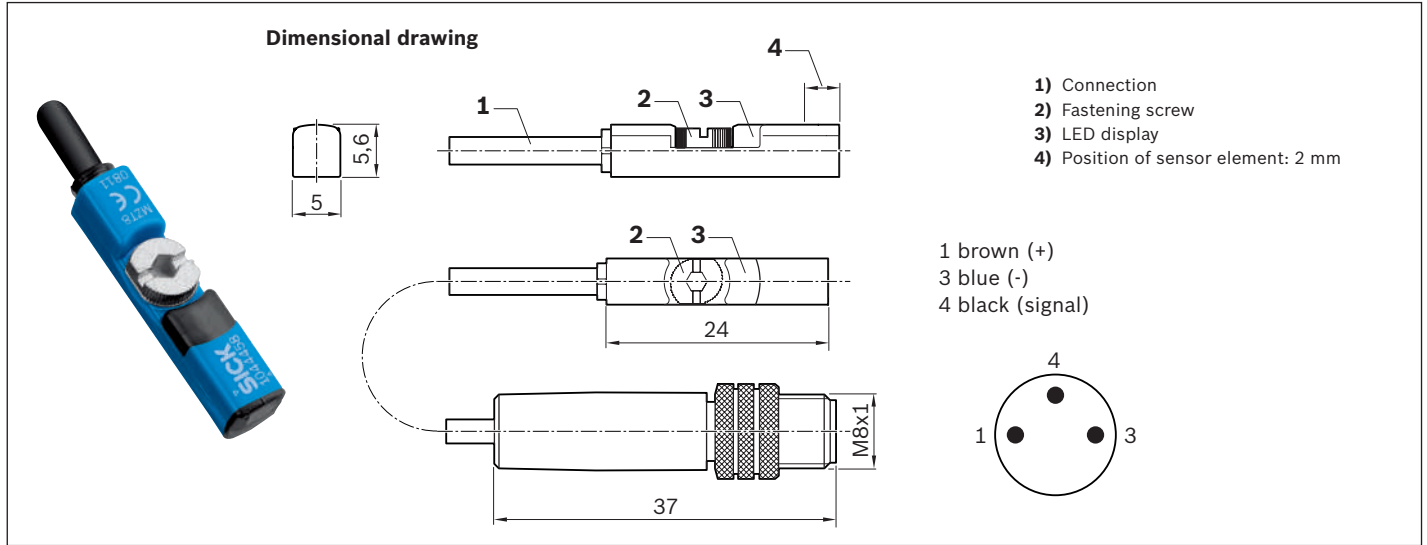


**Magnetic sensor**

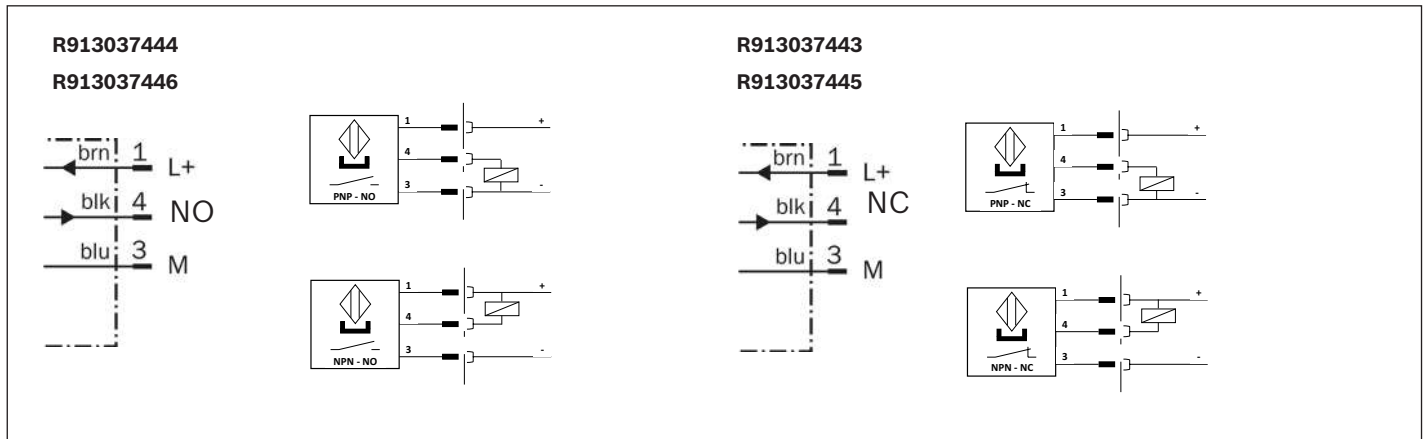


**Connection diagram**



**Part numbers/technical data**


<b>Use</b>	Limit switch	Reference switch	Limit switch	Reference switch
<b>Part number</b>	R913037445	R913037444	R913037443	R913037446
<b>Designation</b>	MZT8-03VPO-KRDS14	MZT8-03VPS-KRDS13	MZT8-03VNO-KRDS16	MZT8-03VNS-KRDS15
<b>Functional principle</b>	Magnetic			
<b>Operating voltage</b>	10 - 30 VDC			
<b>Load current</b>	≤ 200 mA			
<b>Switching function</b>	PNP/NC	PNP/NO	NPN/NC	NPN/NO
<b>Connection type</b>	0.5 m cable and M8x1 connector, 3-pin with knurled screw connection			
<b>Function indicator</b>	✓			
<b>Short-circuit protection</b>	✓			
<b>Reverse polarity protection</b>	✓			
<b>Switch-on suppression</b>	✓			
<b>Switching frequency</b>	3 kHz			
<b>Pulse elongation (off delay)</b>	20 ms			
<b>Max. permissible starting speed</b>	5 m/s			
<b>Suitable for drag chains<sup>1)</sup></b>	✓			
<b>Torsion-resistant<sup>1)</sup></b>	✓			
<b>Weld spark-resistant<sup>1)</sup></b>	—			
<b>Cable cross-section<sup>1)</sup></b>	3x0.14 mm <sup>2</sup>			
<b>Cable diameter D<sup>1)</sup></b>	2.9 ± 0.15 mm			
<b>Static bending radius<sup>1)</sup></b>	≥ 5xD			
<b>Dynamic bending radius<sup>1)</sup></b>	≥ 10xD			
<b>Bending cycles<sup>1)</sup></b>	> 2 mil.			
<b>Maximum permissible travel speed<sup>1)</sup></b>	5 m/s			
<b>Max. permissible acceleration<sup>1)</sup></b>	≤ 5 m/s <sup>2</sup>			
<b>Ambient temperature</b>	-30 °C to +80 °C			
<b>IP rating</b>	IP68			
<b>MTTFd (per EN ISO 13849-1 )</b>	MTTFd = 2339.0 years			
<b>Certifications and approvals<sup>2)</sup></b>	  			

<sup>1)</sup> Technical data only for the cast-on connection cable (0.5 m) on the magnetic sensor. Available extension cables offer even more performance, e.g. for use in a cable drag chain (see below).

<sup>2)</sup> For these products, no  certificate is needed for launching on the Chinese market. Document “CCC sales information” available on request.


**Optical sensor**

EE-SX672P/EE-SX672

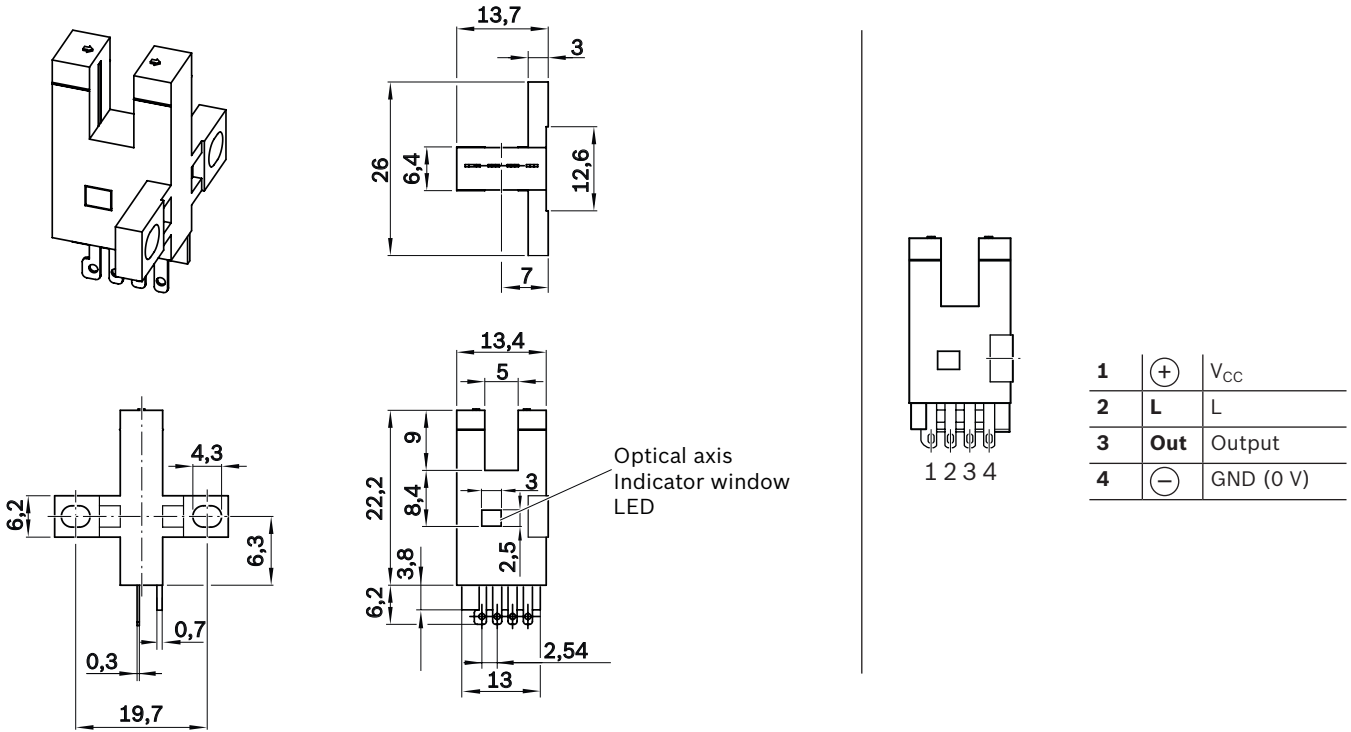


**Connection diagram**

EE-SX672P

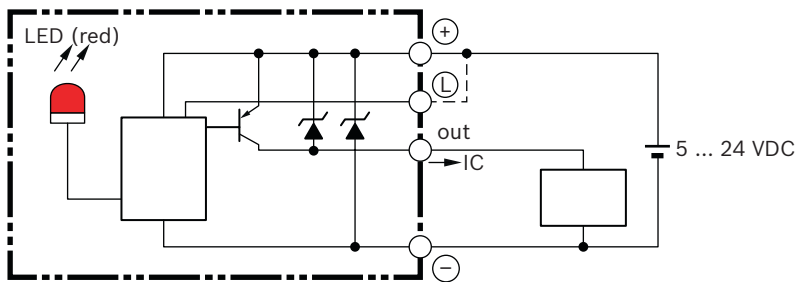

EE-SX672

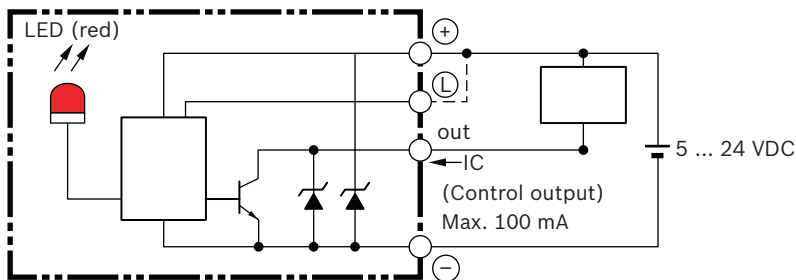


**Part numbers/technical data**

<b>Use</b>	Limit switch/reference switch	
<b>Part number</b>	R901489850 (PNP)	R901489851 (NPN)
<b>Designation</b>	EE-SX672P optical sensor	EE-SX672 optical sensor
<b>Sensor distance</b>	5 mm (aperture width)	
<b>Switching object</b>	Opaque: min. 2 × 0.8 mm	
<b>Differential distance</b>	0.025 mm	
<b>Light source</b>	Infrared LED with peak wavelength of 940 nm	
<b>Indicator</b>	Light indicator (red; turns on when the light is broken in models ending in A or R)	
<b>Power supply</b>	5 to 24 VDC ± 10% residual ripple (p-p): max. 10%	
<b>Current consumption</b>	Max. 12 mA (connector models, L terminal open), max. 30 mA (prewired PNP models)	Max. 12 mA (connector models, L terminal open), max. 35 mA (prewired NPN models)
<b>Control output</b>	Open collector PNP: 5 to 24 VDC, max. 50 mA 50 mA load current with residual voltage of max. 1.3 V OFF current (leakage current): max. 0.5 mA	Open collector NPN 5 to 24 VDC, max. 100 mA 100 mA load current with residual voltage of max. 0.8 V 40 mA load current with residual voltage of max. 0.4 V OFF current (leakage current): max. 0.5 mA
<b>Protective circuits</b>	Load short-circuit protection (connector models), no circuit protection (prewired models)	
<b>Response frequency</b>	Min. 1 kHz (3 kHz average)	
<b>Ambient lighting</b>	Max. 1,000 lx with fluorescent light on receiver surface.	
<b>Ambient temperature range</b>	In operation: -25 °C to +55 °C; in storage: -30 °C to +80 °C (without freezing or condensation)	
<b>Ambient humidity range</b>	In operation: 5 to 85%; in storage: 5 to 95% (without freezing or condensation)	
<b>Vibration resistance</b>	Damage: 20 to 2000 Hz (peak acceleration: 100 m/s <sup>2</sup> ) 1.5 mm double amplitude for 2 h (4 min periods) in x-, y- and z-direction each	
<b>Shock resistance</b>	Damage: 500 m/s <sup>2</sup> 3x in x-, y- and z-direction each	
<b>IP rating</b>	IP50 per IEC 60529	
<b>Connection method</b>	Connector models (direct soldering possible), prewired models (standard cable length: 1 m), models with connections (standard cable length: 0.1 m)	
<b>Weight</b>		
<b>Connector models</b>	Approx. 2.4 g	
<b>Prewired models</b>	Approx. 17.8 g	
<b>Material</b>		
<b>Housing</b>	Polybutylene terephthalate (PBT)	
<b>Cover</b>	Polycarbonate	
<b>Transmitter/receiver</b>		

Connectors

**Extensions for magnetic sensor**

Assembled on one end

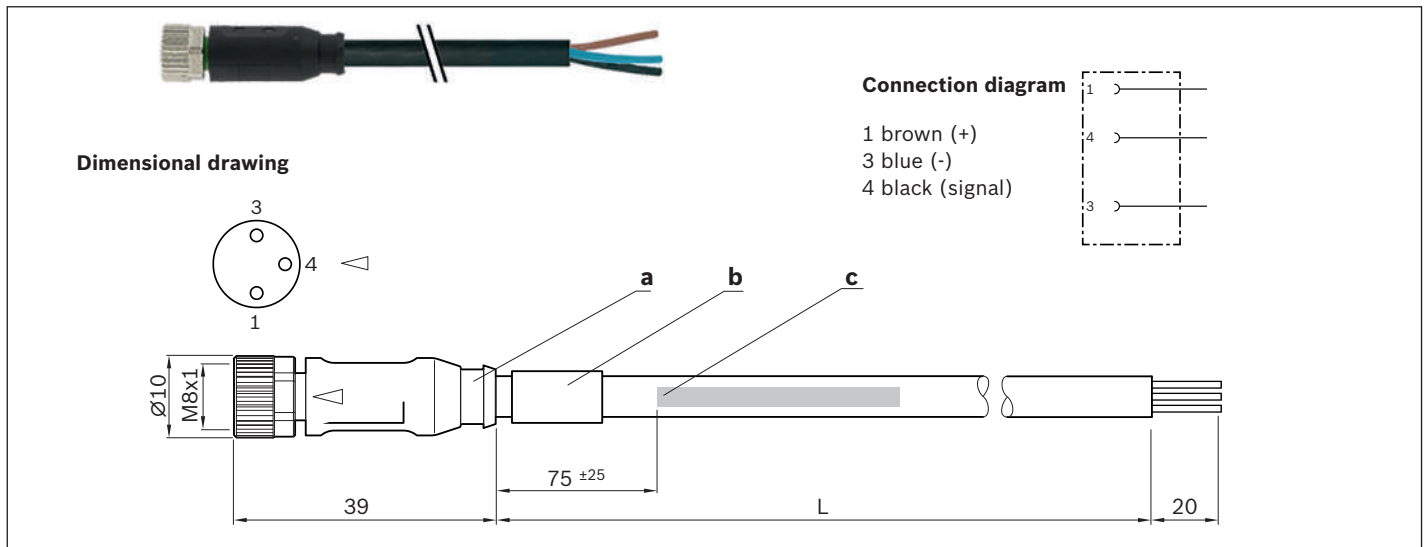

**Part numbers**


Use	Extension cable	
<b>Part number</b>	R911344602	R911344619
<b>Designation</b>	7000-08041-6500500	7000-08041-6501000
<b>Length (L)</b>	5.0 m	10.0 m
<b>1. Connection type</b>	M8x1 3-pin straight female connector	
<b>2. Connection type</b>	Unassembled cable end	

**Technical data**

Function indicator	-
Operating voltage indicator	-
Operating voltage	10–30 V DC
Type of cable	PUR black
Suitable for drag chains	✓
Torsion-resistant	✓
Weld spark-resistant	✓
Cable cross-section	3 x 0.25 mm <sup>2</sup>
Cable diameter D	4.1 ± 0.2 mm
Static bending radius	≥ 5xD
Dynamic bending radius	≥ 10xD
Bending cycles	> 10 mill.
Max. permissible travel speed	3.3 m/s - at 5 m travel range (type) up to 5 m/s at 0.9 m travel range
Max. permissible acceleration	≤ 30 m/s <sup>2</sup>
Ambient temperature when secured	-40 °C to +85 °C
Ambient temperature when loose	-25 °C to +85 °C
Protection class	IP68
Certifications and approvals	    

- a) Contour for 6.5 mm corrugated tube (inner diameter)
- b) Cable grommet
- c) Cable label in accordance with labeling regulation

**Extensions for optical sensor**

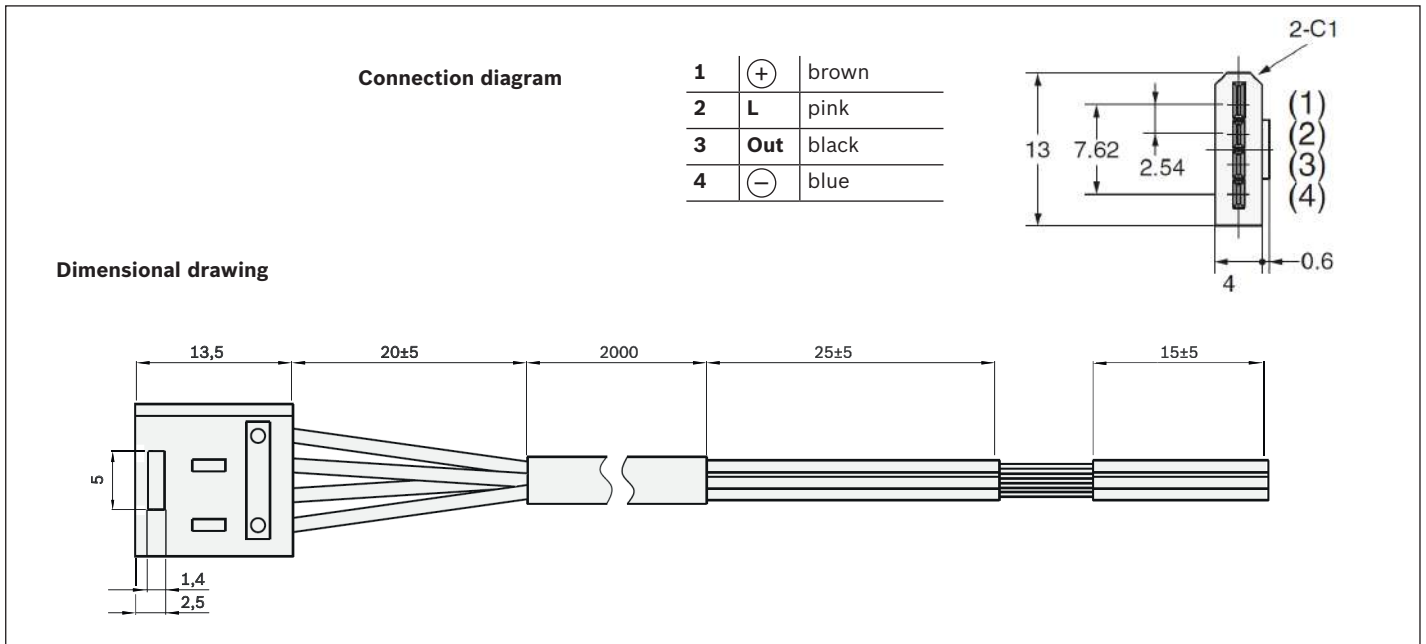

**Part numbers**

<b>Use</b>	Extension cable
<b>Part number</b>	R911388079
<b>Designation</b>	EE-1010 2M
<b>Length (L)</b>	2.0 m
<b>1. Connection type</b>	plug
<b>2. Connection type</b>	Unassembled cable end

## Additional information

### Operating conditions

#### Normal operating conditions

Ambient temperature with Rexroth servo motor	0 °C ... 40 °C, above 40 °C loss of performance
Ambient temperature for mechanical system (no dropping below dew point)	-10 °C ... 60 °C
Travel $s_{\min}^{1)}$	See "Technical data" tables
Soiling	Not permissible

1) Minimum travel to ensure a reliable lubrication distribution.

#### Required and supplementary documentation

For further instructions and information, please refer to the documentation for this product.

You can find PDF files of these documents on the Internet at [www.boschrexroth.com/mediadirectory](http://www.boschrexroth.com/mediadirectory).

We would also be happy to send you the documents you want.

If you are unsure about using this product, please contact Bosch Rexroth.

Documentation

**Standard report**

The standard report serves to confirm that the checks listed in the report have been carried out and that the measured values lie within the permissible tolerances.


**Option 001**

Checks listed in the standard report:


- ▶ Functional checks of mechanical components
- ▶ Functional checks of electrical components
- ▶ Design as per order confirmation

Parameterization (start-up)

The nameplate contains reference information on the production of the Linear Motion System as well as technical start-up parameters.

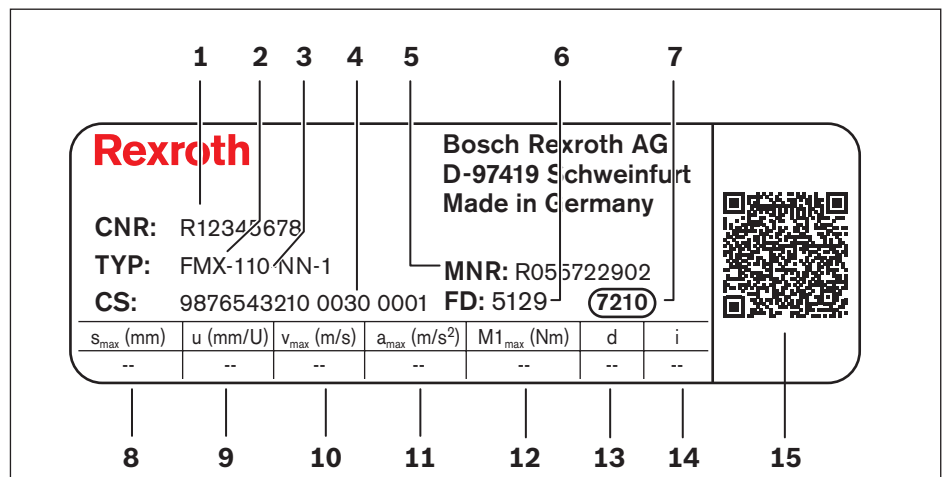

1	CNR	Customer's part number
2	TYP	Short product name
3	110	Size
4	CS	Customer information
5	MNR	Part number
6	FD	Manufacturing date
7	7210	Manufacturing location
8	$s_{max}$	Max. travel range
9	$u$	Lead constant without motor attachment
10	$v_{max}$	Maximum speed
11	$a_{max}$	Max. acceleration
12	$M1_{max}$	Maximum drive torque at motor journal
13	$d$	Direction of motor rotation to move in positive (+) direction CW = clockwise CCW = counterclockwise

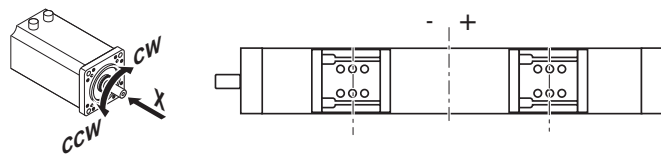


14	$i$	Gear ratio
15		QR code


Lubrication

**Function Module FMS**

**Lube fittings for single-rail version**


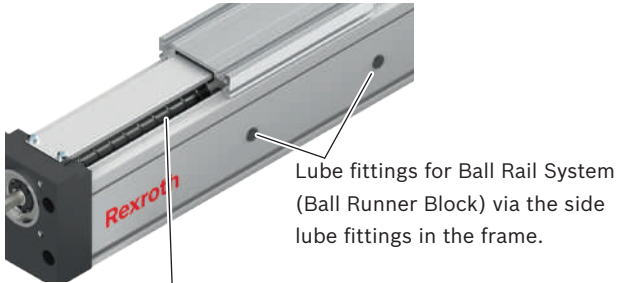


The Ball Screw Assembly is lubricated by the open access between the cover plate and frame.



**Lube fittings for dual-rail version**

Ball Rail Systems (Ball Runner Block) and Ball Screw Assembly are lubricated by the open access between the cover plate and frame.

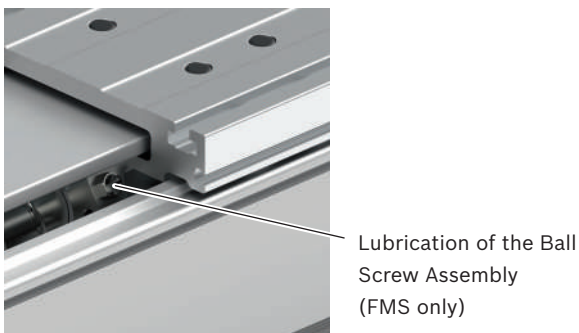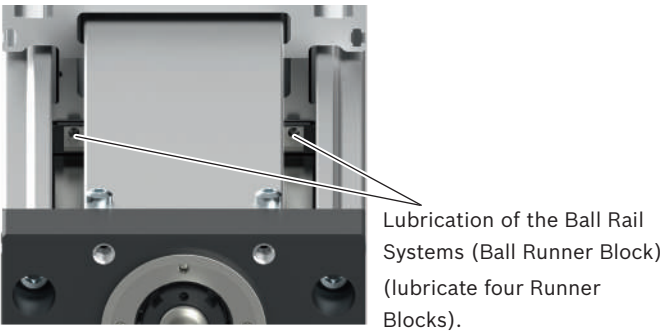


**Function Module FMB**

**Lube fittings for single-rail version**



**Lube fittings for dual-rail version**

Ball Rail Systems (Ball Runner Block) are lubricated by the open access between the cover plate and frame.

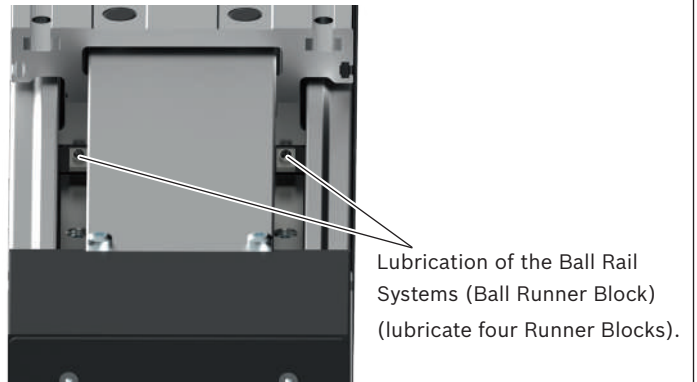

**Recommended lubricants**

**Note on lubrication**

Function Modules come lubricated with Dynalub 510 and are only designed for grease lubrication using a manual grease gun.

Maintenance is limited to relubrication of the integrated Ball Rail System and the Ball Screw Assembly (on FMS Function Modules).

**⚠ Do not use lubricants with solid particles (e.g. graphite or MoS<sub>2</sub> additives).**

**Recommended lubricants**

For relubrication quantity and relubrication intervals, see the Function Module manual.

FMS/FMB	Grease (DIN)	Consistency class DIN 51818	Recommended grease
-080/-110	KP2K-20 (DIN 51825)	NLGI 2	Dynalub 510

**Grease**

**Consistency class NLGI 2  
as per DIN 51818**

We recommend

**Dynalub 510** (Bosch Rexroth)  
 Cartridge (400 g) R341603700  
 Hobbok (25 kg) R341603500

**Can still be used**

Elkalub GLS 135 / N2 (Chemie-Technik)  
 Castrol Longtime PD2 (Castrol)

Sample calculation


**FMS with mount and coupling**

**Given data**

An object weighing 5 kg needs to be moved horizontally 500 mm at a max. speed of 0.5 m/s. The following was selected based on the technical data and the installation space:

**FMS-080-SN-1 Function Module**

- ▶ Motor attachment with mount and coupling
- ▶ With MSM 031C servo motor without brake

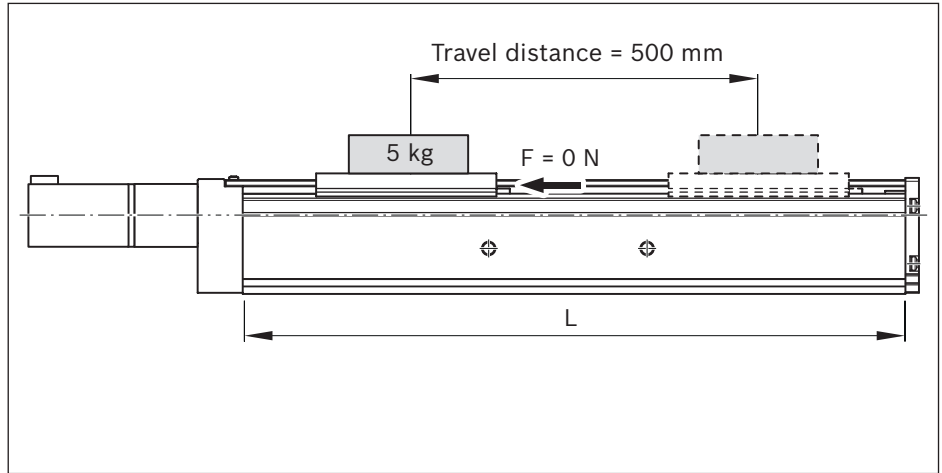

**Estimation of length L**

The initial estimate assumes a large lead ( $P = 16 \text{ mm}$ ) and therefore length, since the permissible speed can decrease as length increases.

	$L = s_{\max} + L_{ca} + L_{ad}$
Excess travel:	$s_e = 2 \cdot P = 2 \cdot 16 = 32 \text{ mm}$
Max. travel distance:	$s_{\max} = s_{\text{eff}} + 2 \cdot s_e$ $= 500 + 2 \cdot 32 = 564 \text{ mm}$
Length:	$L = 564 + 160 + 35 = 759 \text{ mm}$

**Selection of Ball Screw Assembly**

(Better to choose the lowest lead as this is favorable in terms of resolution, braking distance, length.)

Acceptable Ball Screw Assemblies according to “max. permissible speed” graph given  $v = 0.5 \text{ m/s}$  and  $L = 759 \text{ mm}$ :  
BASA 16 x 16 and BASA 16 x 10

Selected Ball Screw Assembly (lower lead):  
BASA 16 x 10

Maximum permissible speed for BASA 16 x 10 as read off from graph:  
 $v_{\max} = 0.56 \text{ m/s}$

**Calculation of length L**

(For selected BASA)

Excess travel:	$s_e = 2 \cdot P = 2 \cdot 10 = 20 \text{ mm}$
Max. travel distance:	$s_{\max} = s_{\text{eff}} + 2 \cdot s_e$ $= 500 + 2 \cdot 20 = 540 \text{ mm}$
Length:	$L = 540 + 160 + 35 = 735 \text{ mm}$

**Frictional torque  $M_R$ :**

(Motor attachment with mount and coupling)

	$M_R = M_{RS}$
Function Module:	$M_{RS} = 0.3 \text{ Nm}$
Frictional torque:	$M_R = 0.3 \text{ Nm}$

**Mass moment of inertia  $J_{ex}$**   
(Motor attachment with mount and coupling)

	$J_{ex} = J_s + J_t + J_c$
Coupling:	$J_c = 40 \cdot 10^{-6} \text{ kgm}^2$
Drive Unit:	$J_s = (k_{J \text{ fix}} + k_{J \text{ var}} \cdot L) \cdot 10^{-6}$ $= (13.232 + 0.031 \cdot 735) \cdot 10^{-6}$ $= 36.017 \cdot 10^{-6} \text{ kgm}^2$
External load:	$J_t = m_{ex} \cdot k_{J \text{ m}} \cdot 10^{-6}$ $= 5 \cdot 2.53 \cdot 10^{-6}$ $= 12.65 \cdot 10^{-6} \text{ kgm}^2$
Mass moment of inertia:	$J_{ex} = 40 \cdot 10^{-6} + 36.017 \cdot 10^{-6} + 12.65 \cdot 10^{-6}$ $= 88.67 \cdot 10^{-6} \text{ kgm}^2$

**Maximum permissible rotary speed  $n_{mech}$**   
(Motor attachment with mount and coupling)  
Limit for mechanical system

	$n_{mech} = \frac{(v_{mech} \cdot 1,000 \cdot 60)}{P}$
Max. permissible speed:	$v_{mech} = v_{max} = 0.56 \text{ m/s}$
Max. permissible rotary speed:	$n_{mech} = \frac{(0.56 \cdot 1,000 \cdot 60)}{10}$ $= 3,360 \text{ rpm}$

**Maximum rotary speed of application  $n_{mech}$**   
(Motor attachment with mount and coupling)  
Application tolerance

Speed:	$v_{mech} = 0.5 \text{ m/s}$
Rotary speed:	$n_{mech} = \frac{0.5 \cdot 1,000 \cdot 60}{10}$ $= 3,000 \text{ rpm}$

**Maximum permissible drive torque  $M_{mech}$**   
(Motor attachment with mount and coupling)  
Limit for mechanical system

	$M_{mech} = \text{Minimum } (M_{cN}; M_p)$
Coupling:	$M_{cN} = 12.5 \text{ Nm}$
Function Module:	$M_p = 3.63 \text{ Nm}$
Drive torque:	$M_{mech} = \text{minimum } (12.5; 3.63)$ $= 3.63 \text{ Nm}$

**FMS with mount and coupling (continued)**

**Motor preselection check**

Selected motor:  
MSM 031C with brake

**Condition 1:**  
Rotary speed:  $n_{\max} \geq n_{\text{mech}}$   
 $5,000 \geq 3,000$  Condition met – motor selection OK

**Condition 2:**  
Mass moment of inertia ratio:  $V = \frac{J_{\text{ex}}}{J_m + J_{\text{br}}}$   
Motor moment of inertia:  $J_m = 26.0 \cdot 10^{-6} \text{ kgm}^2$   
Brake moment of inertia:  $J_{\text{br}} = 0 \text{ kgm}^2$  (without brake)  
Moment of inertia ratio:  $V = \frac{88.67 \cdot 10^{-6}}{(26 \cdot 10^{-6} + 0 \cdot 10^{-6})}$   
 $= 3.4$   
Handling condition:  $V \leq 6$   
 $3.4 \leq 6$  Condition met – motor size OK

**Condition 3:**  
Torque ratio:  $\frac{M_{\text{stat}}}{M_0} \leq 0.6$   
Static load moment:  $M_{\text{stat}} = M_R + M_g$  (installed horizontally  $M_g = 0$ )  
 $= 0.3 \text{ Nm}$   
Continuous motor torque:  $M_0 = 1.3 \text{ Nm}$   
Torque ratio:  $\frac{0.3}{1.3} = 0.23$   
 $0.23 \leq 0.6$  condition met  
– motor selection OK

**All three conditions met  $\Rightarrow$  selected motor is suitable for the application.**

**Result**

**FMS-080-SN-1 Function Module**  
 $L = 735 \text{ mm}$ ,  $s_{\max} = 540 \text{ mm}$ ,  $L_{\text{ca}} = 160 \text{ mm}$ ; BASA:  $d_0 = 60 \text{ mm}$ ,  $P = 10 \text{ mm}$ ; motor attachment with mount and coupling;  
 Motor preselection: MSM 031C without brake.  
 For precise dimensioning of the electric drive, the motor/controller combination must always be considered, as the performance data (e.g. max. useful speed and max. torque) will depend on the controller used.  
 When doing this, the following data must be considered:

Frictional torque:  $M_R = 0.30 \text{ Nm}$   
 Mass moment of inertia:  $J_{\text{ex}} = 88.67 \cdot 10^{-6} \text{ kgm}^2$   
 Speed:  $v_{\text{mech}} = 0.5 \text{ m/s}$  ( $n_{\text{mech}} = 3,000 \text{ rpm}$ )  
 Drive torque limit:  $M_{\text{mech}} = 3.63 \text{ Nm}$   
 $\Rightarrow$  The motor torque must be limited to 3.63 Nm on the drive side.  
 Limit for acceleration:  $a_{\max} = 40 \text{ m/s}^2$   
 Limit value for speed:  $v_{\text{mech}} = 0.56 \text{ m/s}$  ( $n_{\text{mech}} = 3,480 \text{ rpm}$ )

Besides the preferred type MSM 031C, other motors with identical mounting dimensions can be adapted while taking care not to exceed tolerances.



Abbreviations

Code/ index	Designation	Unit
<b>a</b>	Acceleration	(m/s <sup>2</sup> )
<b>a<sub>max</sub></b>	Max. acceleration	(m/s <sup>2</sup> )
<b>BASA</b>	Ball Screw Assembly	(–)
<b>B<sub>t</sub></b>	Belt type	(–)
<b>c<sub>spe</sub></b>	Specific spring rate	(N)
<b>C</b>	Dynamic load capacity, guideway	(N)
<b>C<sub>bs</sub></b>	Dynamic load rating for Ball Screw Assembly	(N)
<b>C<sub>fb</sub></b>	Dynamic load rating for fixed bearing	(N)
<b>d<sub>0</sub></b>	Nominal diameter of Ball Screw Assembly	(mm)
<b>d<sub>3</sub></b>	Belt pulley diameter	(mm)
<b>f<sub>w</sub></b>	Load factor	(–)
<b>F<sub>1</sub>, F<sub>2</sub>, ... F<sub>n</sub></b>	Axial load during phases 1 ... n	(N)
<b>F<sub>bp</sub></b>	Max. belt driving force	(N)
<b>F<sub>comb</sub></b>	Combined equivalent load on bearing	(N)
<b>F<sub>m</sub></b>	Equivalent dynamic axial load	(N)
<b>F<sub>pr</sub></b>	Preload force on motor	(N)
<b>F<sub>t perm</sub></b>	Belt elasticity limit	(N)
<b>F<sub>x max</sub></b>	Maximal zulässige Kraft in x-Richtung	(N)
<b>F<sub>y</sub></b>	Load from a resulting force in y-direction	(N)
<b>F<sub>y max</sub></b>	Max. dynamic load in y-direction	(N)
<b>F<sub>z</sub></b>	Load from a resulting force in z-direction	(N)
<b>F<sub>z max</sub></b>	Max. dynamic load in z-direction	(N)
<b>g</b>	Gravity (= 9.81)	(m/s <sup>2</sup> )
<b>i</b>	Gear ratio	(–)
<b>I<sub>y</sub></b>	Planar moment of inertia about the y-axis	
<b>I<sub>z</sub></b>	Planar moment of inertia about the z-axis	
<b>J<sub>br</sub></b>	Mass moment of inertia of motor brake	(kgm <sup>2</sup> )
<b>J<sub>c</sub></b>	Mass moment of inertia of coupling	(kgm <sup>2</sup> )
<b>J<sub>dc</sub></b>	Mass moment of inertia of drive train	(kgm <sup>2</sup> )
<b>J<sub>ex</sub></b>	Mass moment of inertia of the mechanical system	(kgm <sup>2</sup> )
<b>J<sub>ge</sub></b>	Mass moment of inertia of gear about the motor journal	(kgm <sup>2</sup> )
<b>J<sub>m</sub></b>	Mass moment of inertia of motor	(kgm <sup>2</sup> )
<b>J<sub>s</sub></b>	Mass moment of inertia of Linear Motion System	(kgm <sup>2</sup> )
<b>J<sub>sd</sub></b>	Mass moment of inertia of belt timing belt side drive about the motor journal	(kgm <sup>2</sup> )
<b>J<sub>t</sub></b>	Translatory mass moment of inertia of external load about the Linear Motion System screw journal	(kgm <sup>2</sup> )
<b>k<sub>g fix</sub></b>	Constant for fixed portion of mass	(kg)
<b>k<sub>g var</sub></b>	Constant for variable-length portion of mass	(kg/mm)
<b>k<sub>J fix</sub></b>	Constant for fixed portion of mass moment of inertia	(kgmm <sup>2</sup> )
<b>k<sub>J m</sub></b>	Constant for mass-specific portion of mass moment of inertia	(mm <sup>2</sup> )

Code/ index	Designation	Unit
<b>k<sub>J var</sub></b>	Constant for variable-length portion of mass moment of inertia	(kgmm)
<b>L</b>	Length of Linear Motion System	(mm)
<b>L</b>	Nominal life – in revolutions – in meters	(rpm) (m)
<b>L<sub>ad</sub></b>	Additional length	(mm)
<b>L<sub>ca</sub></b>	Carriage length	(mm)
<b>L<sub>h</sub></b>	Nominal life	(h)
<b>L<sub>m</sub></b>	Motor length	(mm)
<b>L<sub>max</sub></b>	Max. length	(mm)
<b>L<sub>w</sub></b>	Center-to-center distance between carriages	(mm)
<b>m<sub>br</sub></b>	Brake mass	(kg)
<b>m<sub>ca</sub></b>	Moved system mass of carriage	(kg)
<b>m<sub>ex</sub></b>	Moved external mass	(kg)
<b>m<sub>fc</sub></b>	Mass of mount and coupling	(kg)
<b>m<sub>m</sub></b>	Motor mass	(kg)
<b>m<sub>s</sub></b>	Mass of Linear Motion System (without attachments)	(kg)
<b>m<sub>sd</sub></b>	Mass of timing belt side drive	(kg)
<b>M<sub>0</sub></b>	Continuous motor torque	(Nm)
<b>M<sub>cN</sub></b>	Nominal coupling torque	(Nm)
<b>M<sub>g</sub></b>	Weight moment at motor journal	(Nm)
<b>M<sub>ge</sub></b>	Maximum permissible acceleration torque of the gear (on the output drive)	(Nm)
<b>M<sub>L</sub></b>	Dynamic longitudinal moment load capacity	(Nm)
<b>M<sub>m</sub></b>	Equivalent dynamic torque	(Nm)
<b>M<sub>max</sub></b>	Max. possible motor torque	(Nm)
<b>M<sub>mech</sub></b>	Maximum permissible drive torque of mechanical system	(Nm)
<b>M<sub>p</sub></b>	Maximum permissible drive torque (at drive journal)	(Nm)
<b>M<sub>R</sub></b>	Frictional torque at motor journal	(Nm)
<b>M<sub>Rge</sub></b>	Frictional torque of gear at motor journal	(Nm)
<b>M<sub>Rs</sub></b>	Frictional torque of system	(Nm)
<b>M<sub>Rsd</sub></b>	Frictional torque of timing belt side drive at motor journal	(Nm)
<b>M<sub>sd</sub></b>	Maximum permissible drive torque of the timing belt side drive	(Nm)
<b>M<sub>stat</sub></b>	Static load moment	(Nm)
<b>M<sub>t</sub></b>	Dynamic torsional moment load capacity	(Nm)
<b>M<sub>x</sub></b>	Dynamic torsional moment around the x-axis	(Nm)
<b>M<sub>x max</sub></b>	Maximum permissible torsional moment around the x-axis	(Nm)
<b>M<sub>y</sub></b>	Dynamic torsional moment around the y-axis	(Nm)
<b>M<sub>y max</sub></b>	Maximum permissible torsional moment around the y-axis	(Nm)

<b>Code/ index</b>	<b>Designation</b>	<b>Unit</b>
$M_z$	Dynamic torsional moment around the z-axis	(Nm)
$M_{z \max}$	Maximum permissible torsional moment around the z-axis	(Nm)
$n_1, n_2, \dots, n_n$	Rotary speed in acceleration and braking phases	(rpm)
$n_{A1-n}$	Starting speed in Phase 1–n	(rpm)
$n_{E1-n}$	Ending speed in Phase 1–n	(rpm)
$n_{ge}$	Maximum permissible rotary speed of the gear	(rpm)
$n_m$	Mean speed	(rpm)
$n_{mech}$	Maximum permissible speed of mechanical system	(rpm)
$n_{max}$	Max. motor speed	(rpm)
$n_P$	Maximum permissible rotary speed of the Linear Motion System	(rpm)
$P$	Screw lead	(mm)
$P_{app}$	Effective power in application	(W)
<b>Keyway</b>	Keyway	(–)
$s_a$	Acceleration travel	(mm)
$s_e$	Excess travel	(mm)
$s_{eff}$	Effective stroke	(mm)
$s_{min}$	Min. travel distance	(mm)
$s_{max}$	Max. travel distance	(mm)
$t_a$	Acceleration time, braking time	(s)
$t_1, t_2, \dots, t_n$	Time for Phase 1 ... n	(s)
$u$	Lead constant	(mm/ rev)
$v_1, v_2, \dots, v_n$	Speed in phase 1 ... n	(m/s)
$v_{max}$	Maximum permissible speed	(m/s)
$v_{mech}$	Maximum permissible speed for mechanical system	(m/s)
$v_m$	Mean speed	(m/s)
$V$	Ratio of mass moments of inertia of drive train and motor	(–)
$z_1$	Application point of the effective force	(mm)
$p$	Pi	(–)

Sample order for FMS-080-SN-1

Ordering data	Option	Description
<b>Function Module</b>	FMS-080-SN-1	Function Module with Size 80 Ball Screw Assembly
<b>Travel distance</b>	500 mm	Required travel distance
<b>Carriage</b>	002	Carriage length = 160 mm
<b>Guideway</b>	001	Ball Rail System
<b>Drive</b>		
BASA (Ball Screw Assembly $d_o \times P$ )	011	Nominal diameter = 16 mm, lead = 10 mm
<b>Version</b>	F001	With mount and coupling
<b>Mounting interface</b>		
Gear ratio	i = 1	Gear ratio i = 1
Mechanical interface	011	Motor attachment for MSM031C servo motor
<b>Motor</b>		
Motor code	MSM031C-0300	Motor code
Motor brake	139	With brake
Motor connector position	180	Motor connector position = 180°
<b>Cover</b>		
Cover plate	010	With cover plate
<b>Documentation</b>	001	Standard report

Inquiry/order form for FMx-xxx-xN-1

Ordering data	Option	Description
<b>Function Module</b>		
<b>Travel distance</b>		
<b>Carriage</b>		
<b>Guideway</b>		
<b>Drive</b>		
BASA (Ball Screw Assembly d <sub>0</sub> x P)		
<b>Version</b>		
<b>Mounting interface</b>		
Gear ratio		
Mechanical interface		
<b>Motor</b>		
Motor code		
Motor brake		
Motor connector position		
<b>Cover</b>		
Cover plate		
<b>Documentation</b>		

**Quantity**                      Acceptance of: \_\_\_\_\_ unit(s), \_\_\_\_\_ per month, \_\_\_\_\_ per year, per order, or \_\_\_\_\_  
 Comments:


**From**

Company: _____	Name: _____
Address: _____	Department: _____
_____	Telephone: _____
_____	Telefax: _____

Further information


**Bosch Rexroth Linear Motion Technology homepage:**

<https://www.boschrexroth.com/en/xc/products/product-groups/linear-motion-technology/index>

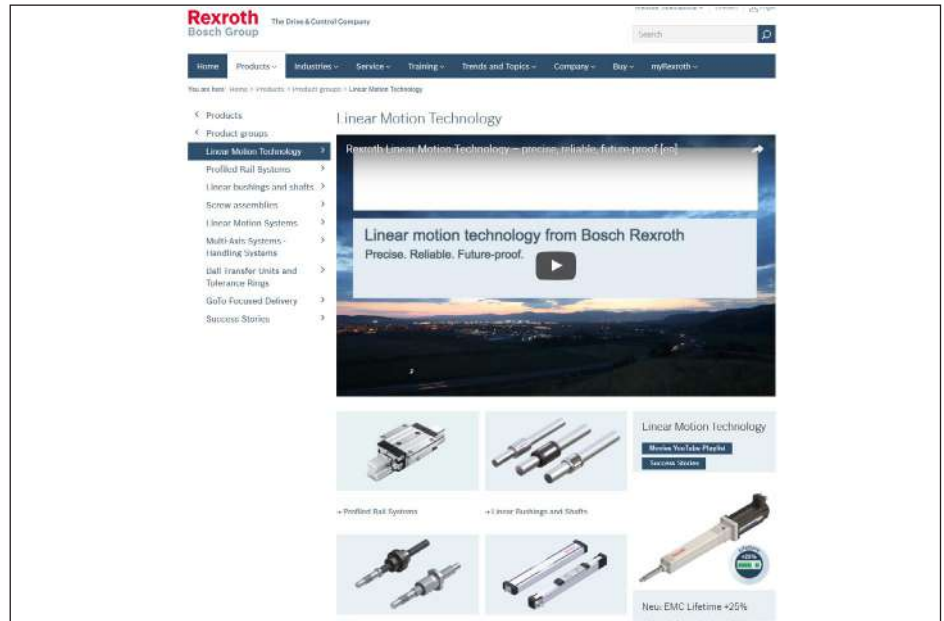

**Configurators and tools**

<https://www.boschrexroth.com/en/xc/products/engineering/econfigurators-and-tools/econfigurators>

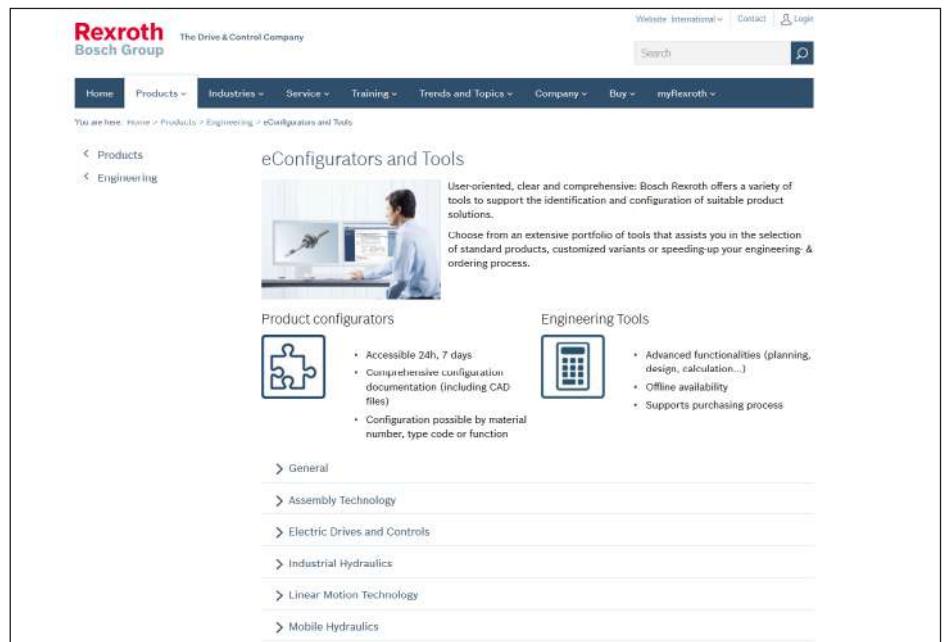



**Bosch Rexroth AG**

Ernst-Sachs-Straße 100  
97424 Schweinfurt, Germany  
Tel. +49 9721 937-0  
Fax +49 9721 937-275  
[www.boschrexroth.com](http://www.boschrexroth.com)

**Find your local contact person here:**

[www.boschrexroth.com/contact](http://www.boschrexroth.com/contact)

The data specified above only serves to describe the product.  
No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.